



TECHNICAL REFERENCE MANUAL

KRYPTON V20-2







# 1. Table of Contents

1. Table of Contents	2
2. About this document	7
2.1. Legend	7
2.2. Online versions	8
2.2.1. KRYPTON® Technical Reference Manual	8
2.2.2. DewesoftX® User Manual	8
3. Getting started	9
3.1. Software installation	9
3.2. Connecting Krypton	9
3.2.1. DewesoftX® Settings for Krypton	10
3.2.2. Channel setup Krypton	11
3.3. Simple Measurement	12
3.3.1. Help - manual	12
3.3.2. Analogue channel setup	12
3.3.3. Sample rate	13
3.3.4. Measurement Mode	14
3.3.5. Analyse Mode	15
3.4. Advanced configuration	16
3.5. Firmware upgrade	17
3.6. Licensing	18
3.7. Troubleshooting	19
4. System overview	21
4.1. Main features	22
4.1.1. EtherCAT Distributed DATA Acquisition	22
4.1.2. Small and Flexible Data Acquisition	23
4.1.3. Robust and rugged Data Acquisition	23
4.1.4. High-end signal conditioning	24
4.1.5. KRYPTON ONE - Single channel Data Acquisition	25
4.1.6. DAQ Synchronization	25
4.2. General specifications	26
5. Krypton modules	27
5.1. Overview	28
5.1.1. KRYPTON Multichannel	28
5.1.1.1. Krypton single width	29
5.1.1.2. Krypton dual width	30
5.1.2. KRYPTON ONE	31
5.1.2.1. Krypton ONE form factor	32
5.1.3. General connection diagrams	33

KRYPTON® V20-1 2/142



5.2. ACC: Accelerometer	33
5.2.1. ACC: specifications	34
5.2.2. KRYPTON-8xACC	36
5.2.3. KRYPTON-4xACC	36
5.2.4. KRYPTONi-1xACC	37
5.2.5. ACC: Connectors	37
5.2.6. ACC: Wiring diagrams	38
5.2.6.1. ACC: Voltage	38
5.2.6.2. ACC: IEPE	38
5.3. AO: Analog Out	39
5.3.1. AO: specifications	39
5.3.2. KRYPTON-1xAO	40
5.3.3. AO: connectors	40
5.4. CAN: Controller Area Network	41
5.4.1. CAN: specifications	41
5.4.2. KRYPTONi-2xCAN-USB	42
5.4.3. KRYPTONi-1xCAN	43
5.4.4. KRYPTONi-1xCAN-FD	43
5.4.5. CAN: connectors	44
5.5. CNT: Counter	45
5.5.1. CNT: specifications	45
5.5.2. KRYPTON-1xCNT	46
5.5.3. CNT: connectors	46
5.6. DIO: Digital Input/Output	47
5.6.1. DIO: specifications	47
5.6.2. KRYPTONi-16xDI	49
5.6.3. KRYPTONi-16xDO	50
5.6.4. KRYPTONi-8xDI-8xDO	50
5.6.5. KRYPTONi-4xDI	51
5.6.6. KRYPTONi-4xDO	51
5.6.7. DIO: connectors	52
5.6.7.1. KRYPTON Multichannel DIO modules: connectors	52
5.6.7.2. Krypton 4xDI and 4xDO connectors	54
5.7. HV: High Voltage	55
5.7.1. HV: specifications	55
5.7.2. KRYPTONi-1xHV	56
5.7.3. HV: connectors	56
5.7.4. HV: wiring diagrams	57
5.7.4.1. HV: Voltage	57
5.8. LA: Low Amperage	58
5.8.1. LA: specifications	58
5.8.2. KRYPTONi-8xLA	59
5.8.3. LA: connectors	59
5.8.4. LA: wiring diagrams	60

KRYPTON® V20-1 3/142



5.8.4.I. LA: Current	60
5.9. LV: Low Voltage	61
5.9.1. LV: specifications	61
5.9.2. KRYPTONi-8xLV	63
5.9.3. KRYPTONi-4xLV	63
5.9.4. KRYPTONi-1xLV	64
5.9.5. LV: connectors	64
5.9.6. LV: wiring diagrams	65
5.9.6.1. LV: Voltage	65
5.10. RTD: Resistance Temperature Detector	66
5.10.1. RTD: specifications	66
5.10.2. KRYPTONi-8xRTD	67
5.10.3. RTD: connectors	67
5.10.4. RTD: wiring diagrams	68
5.10.4.1. RTD: Voltage	68
5.10.4.2. RTD: Resistance	68
5.10.4.3. RTD: Temperature (3-wire)	69
5.10.4.4. RTD: Temperature (4-wire)	69
5.11. STG: Strain Gauge	70
5.11.1. STG: specifications	70
5.11.2. KRYPTON-6xSTG	73
5.11.3. KRYPTON-6xSTG-L2B10f	73
5.11.4. KRYPTON-3xSTG	74
5.11.5. KRYPTON-3xSTG-L2B10fs	74
5.11.6. KRYPTONI-1xSTG	75
5.11.7. STG: connectors	75
5.11.8. STG: wiring diagrams	77
5.11.8.1. STG: Voltage	77
5.11.8.2. STG: Bridge	78
5.11.8.3. STG: Current	79
5.11.8.4. STG: Potentiometer	80
5.12. TH: Thermocouple	81
5.12.1. TH: specifications	81
5.12.2. KRYPTONi-8xTH	82
5.12.3. KRYPTONi-16xTH	83
5.12.4. KRYPTONi-1xTH-HV	83
5.12.5. TH: connectors	84
5.12.6. TH: wiring diagrams	84
5.12.6.1. KRYPTONi-8xTH, KRYPTONi-16xTH: Voltage	84
5.12.6.2. KRYPTONi-8xTH, KRYPTONi-16xTH: Temperature	85
5.12.6.3. KRYPTONi-1xTH-HV: Temperature	87
6. KRYPTON CPU	88
6.1. KRYPTON CPU: specifications	89

KRYPTON® V20-1 4/142



6.2. KRYPION CPU: almensions	90
6.3. Connectors	91
6.3.1. Pinout : Power In Connector	91
7. KRYPTON Accessories	92
7.1. KRYPTON Power Supply	92
7.2. KRYPTON-CPU Power Supply	92
7.3. ECAT Power Junction	93
7.3.1. Pinout : Power in connector	94
7.3.2. Pinout: RJ45 connector	94
7.3.3. Pinout: EtherCAT connector	95
7.4. ECAT Power Injector	96
7.4.1. Pinout : PWR connector	97
7.4.2. Pinout : EtherCAT out connector	97
7.4.3. Pinout: EtherCAT IN connector	98
7.5. ECAT Sync Junction	99
7.5.1. Pinout : EtherCAT out connector	100
7.5.2. Pinout: EtherCAT in connector	100
7.5.3. Pinout: Sync connector	101
7.5.4. ECAT Sync Junction: Specifications	102
7.6. ECAT GPS Junction	103
7.6.1. Pinout : EtherCAT out connector	104
7.6.2. Pinout: EtherCAT in connector	104
7.6.3. Pinout: Sync connector	105
8. Hardware overview	106
8.1. EtherCAT connector	106
8.1.1. Cable	106
8.1.2. Pinout: IN connector	106
8.1.3. Pinout: OUT connector	107
8.2. LEDs blinking codes	108
8.2.1. INIT state	108
8.2.2. PRE-OP state	109
8.2.3. SAFE-OP state	110
8.2.4. OP state	110
8.3. Mechanical locking of modules	111
8.4. Mounting plates	111
8.4.1. DS-MOUNT-K2	112
8.4.2. DS-MOUNT-K3	112
8.4.3. DS-MOUNT2-K	112
9. Connection overview	113
9.1. Only EtherCAT devices	116
9.2. Power Injector	116
9.3. Power Junction	119

KRYPTON® V20-1 5/142



9.4. Distributed system with Krypton ONE	120
9.5. Ecat Sync Junction/Ecat GPS Junction	121
9.6. Connecting SIRIUS-R4 and Krypton STG	123
9.7. Soft-Sync connection	124
9.8. Mixed system	124
9.9. Two EtherCAT lines	125
9.9.1. Use computer which has more than one Ethernet port	126
9.9.2. Use the DS-HUBe7 junction	127
10. Advanced	127
10.1. PWM output on Krypton 4xDO	128
11. Appendix	129
11.1. Glossary and abbreviations	130
12. Warranty information	135
12.1. Calibration	135
12.2. Support	135
12.3. Service/repair	135
12.4. Restricted rights	135
12.5. Copyright	135
12.6. Trademarks	136
13. Safety instructions	136
13.1. General Safety Instructions	137
13.1.1. Environmental Considerations	137
13.1.2. Product End-of-Life Handling	138
14. Documentation version	141
141 Previous versions history	142

KRYPTON® V20-1 6/142



# 2. About this document

This is the Technical Reference Manual for Krypton devices.

The manual is divided into several chapters. You will find:

- A description of the system and the main combination and expansion options
- The description of the connection variants and the pin assignments on the inputs and outputs
- A comprehensive introduction to the configuration of the slices using DewesoftX® software.
- Technical data

Only Dewesoft Version X2-SP4 or higher support Krypton.
Only Dewesoft Version X3-SP1 or higher support Krypton One.

# 2.1. Legend

The following symbols and formats will be used throughout the document.



#### **Important**

Gives you important information about a subject. Please read carefully!



#### Hint

Gives you a Hint or provides additional information about a subject.



#### **Example**

Gives you an example to a specific subject.

Safety symbols in the manual:



### Warning

Calls attention to a procedure, practice, or condition that could cause the body injury or death



### **Caution**

Calls attention to a procedure, practice, or condition that could possibly cause damage to equipment or permanent loss of data.

KRYPTON® V20-1 7/142



### 2.2. Online versions

#### 2.2.1. KRYPTON® Technical Reference Manual

The most recent version of this manual can be downloaded from our homepage: https://download.dewesoft.com/list/manuals-brochures/hardware-manuals

In the Hardware Manuals section click the download link for the KRYPTON® technical reference manual.

#### 2.2.2. DewesoftX® User Manual

The DewesoftX® User Manual document provides basics and additional information and examples for working with DewesoftX® and certain parts of the program.

The latest version of the DewesoftX® tutorials can be found here:

https://download.dewesoft.com/list/manuals-brochures/software-manuals

In the Software Manuals section click the download link of the DewesoftX® User Manual entry.



#### **Important**

Read safety instructions first in chapter Safety instructions.

KRYPTON® V20-1 8/142



# 3. Getting started


This chapter will help you to install the software, connect your Krypton system to the PC via EtherCAT, and will show you how to configure DewesoftX®.

To follow these steps, you need the following items:

- your brand new Krypton system (included in the shipment)
- your Krypton EtherCAT cable (included in the shipment)
- your PC with Windows 10
- Note: older versions like Windows® 7 may also work

### 3.1. Software installation

For optimal working, we recommend that you install the latest version of DewesoftX®. If you already have DewesoftX® installed, please check if a newer version is already available. You can either check on the website under Support/Downloads/DewesoftX directly in software under the Options/Check for updates. In both cases the changelog is included

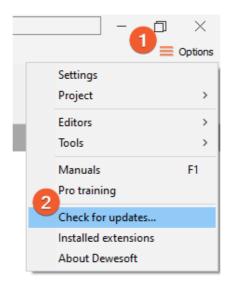

Check for updates

# 3.2. Connecting Krypton

In this chapter, you can see the basic instructions for connecting Krypton devices. Advanced connections are described in the following chapters.

First connect the power supply cable (the standard PS cable is PS-120-L1T8m) to the OUT (8-pin LEMO) connector. Then connect the ethernet cable (L1T8f-RJ45-1M) to the IN connector of the Krypton device. Finally connect the other side of the ethernet cable (RJ-45) to the LAN port of the PC. Since EtherCAT is compatible with ethernet any standard ethernet card should work. As soon as you have connected the data-cable the L-LED will be active. You can find advanced connections in chapter 8. Connection overview.

KRYPTON® V20-1 9/142






Connection of Krypton device to PC


# 3.2.1. DewesoftX® Settings for Krypton

The connected device will show up in DewesoftX® settings. Click on the Options button at the top right, and then on the Settings item in the pop-up to open the DewesoftX® settings dialogue.



DewesoftX® settings

In the Devices section, you can see the connected Krypton device. When you select one of them, the properties pane at the right will show the related data e.g. Serial number, Firmware version, etc.

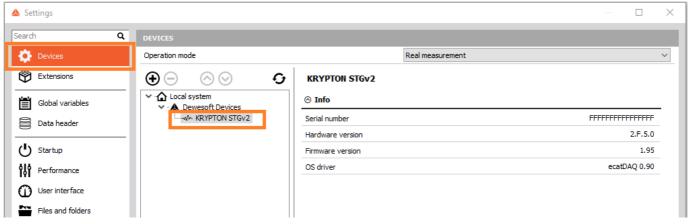

DewesoftX® settings: Devices

KRYPTON® V20-1 10/142




### 3.2.2. Channel setup Krypton

When DewesoftX® has started up, you will be in Measure mode and see the Setup files list or you can create a New setup ①. Click on Ch. setup (on the right of Setup files) to switch to the Channel setup mode ②. In the channel setup you can see a preview of the connected devices on the upper left side.



Setup files

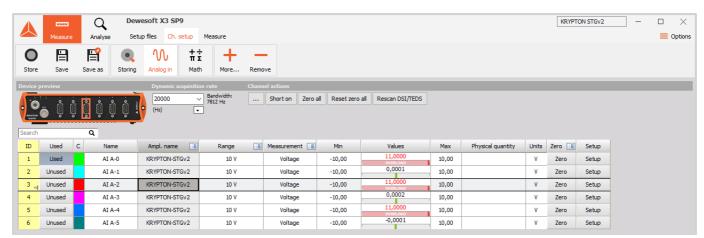

Channel setup Krypton



## Hint

When you click on a connector in the image the corresponding channel in the Channel setup grid will automatically be selected. This also works the other way around: when you select a channel (or multiple channels) in the setup grid, the corresponding connectors in the image will be highlighted.

The sampling rate will be set for all connected Krypton devices: of course only up to the max. sampling rate of the individual slices.

KRYPTON® V20-1 11/142




# 3.3. Simple Measurement

This chapter describes measurement basics, how to configure Krypton and gives some details on the measurement setup.

### 3.3.1. Help - manual

Note that this document is just a quick start guide. For detailed information about DewesoftX® consult the Manual. To open the manual press the F1 button or click on the Options button 1 and then select Manual from the pop-up menu 2.

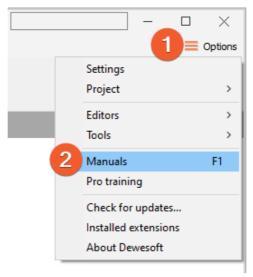


Help - Manual

### 3.3.2. Analogue channel setup

In the analogue channel setup screen you can see all channels of your connected Krypton systems. Per default only the first channel will be set to Used. Unused channels will not show up in measure mode and can not be used for display, calculations or storing: thus, we will also set the other channels to the used. You can left-click on the Used column of channel 2 1, hold the mouse button and move the mouse down to channel 6 2: then release the mouse button and all channels will be selected – this is shown by the black rectangle around the buttons. Then you can click into the selected region to toggle Used/Unused for all channels at once. The selected channels will also be highlighted in the small preview image of the device 3.

When you press the Setup button of a channel (the column at the right edge of the channel table – not shown in the Channel setup screen image), you can change all the settings of the channel amplifier. You can also change the sample rate of Krypton 4.

KRYPTON® V20-1 12/142

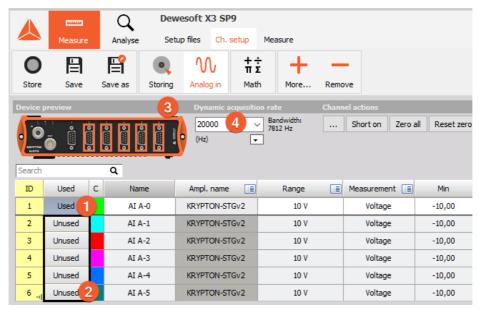


Channel setup screen

### 3.3.3. Sample rate

One of the most important settings is the sample rate. The sample rate defines how many data points Krypton will transfer to the DewesoftX®. Higher sample rate also means that more data needs to be transferred via EtherCAT to your computer.

The sampling speed mainly depends on your application. To display your signal in a time domain with a good time resolution, you should sample 10 to 20 times faster than the frequency of the signal that you want to measure, e.g. 1000 S/sec for a 50 Hz sine-wave. If you have a lot of high frequency components, it may be necessary to sample 100 times faster, e.g. 5000 S/sec for the 50 Hz sine-wave, or even more. If you display only the frequency domain (FFT analysis), a 2.5 times faster sampling would be sufficient (125 S/sec for the 50 Hz sine-wave). The higher the sampling rate, the better the time resolution. But also the file size will increase. In the following image you can see that the maximum sample rate is different for Krypton devices. For example the STG module has max. 20 kS/sec and TH module has a max. 100 S/sec of sampling rate. The Krypton ONE family has a 40 kS/sec maximum sample rate with the Krypton 1xACC exception which has a sample rate up to 50 kS/sec.

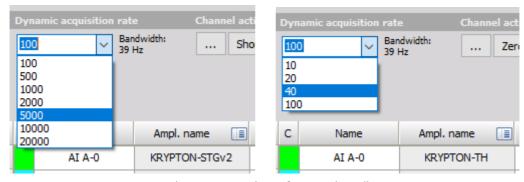

Sample rate comparison of STG and TH slices

KRYPTON® V20-1 13/142



#### 3.3.4. Measurement Mode

A click on Measure (at the right side of Ch. setup option) will take you to the Recorder screen measure mode where you can already see live data.



#### **Important**

When switching to Measure mode the data will not be stored automatically.



Measure mode

In measure mode you can have several measurement displays **6**. DewesoftX® will create 2 default displays: Recorder and Custom but you can also create new displays or change the widgets on existing displays as you like.

The most important sections of the Measure mode are highlighted in the Measure mode image:

• shows the live measurement data in different widgets which are depending on the selected measurement screen. In this case we see a simple recorder widget where data is presented in time domain. You can use the channel-selector list • to assign measurement channels to the widgets. Each widget has different settings, • shows the settings of the currently selected recorder widget.

To start storing the data, press the Store button 4. When you are done with recording, press the Stop button.


Now DewesoftX® has created a datafile with all the data that you have seen during the recording session. You can now click the Analyze button (on the left-top of the screen to the right of the Measure button) to go to Analyse mode.

KRYPTON® V20-1 14/142



### 3.3.5. Analyse Mode

When you have just stopped a measurement and switched to Analyze mode, DewesoftX® will automatically open the last recorded data file in Review mode, so that you can start the analysis right away.

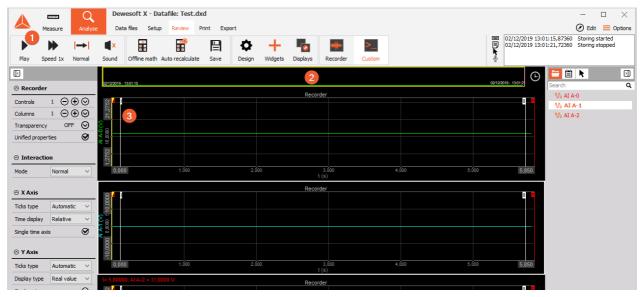

Analyse mode

The Review mode is much like the measurement mode. You will see the same measurement displays, the channel-selector list and the properties of the currently selected widget.

Differences are:

- 1 you have additional tool-buttons
- 2 there is a Signal overview window which will show you the whole data of one selected channel of the data file
- 3 there are additional cursors (Yellow and two white cursors)


Now you can use the cursors to analyse your data, zoom in and out of the data, click Offline math to add computations based on your data, etc. You can also change the design of your measurement displays, print reports based on your data and export the data to other file formats for further analysis.

KRYPTON® V20-1 15/142



# 3.4. Advanced configuration


Note, that the Dewesoft's launcher has already done the hardware setup for you – you can check this in the Settings dialogue. Click the Options button ① – and then click the Settings menu item ②.

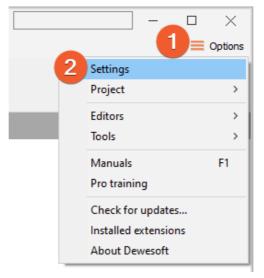

Open settings dialogue

The settings window will appear where all the currently connected devices will be seen.

If you add a device while this screen is open (or if your device is not shown yet), you can press the Refresh button 3 to scan for devices. When you select a device from the list you will see all the device details and settings in the right area 4.

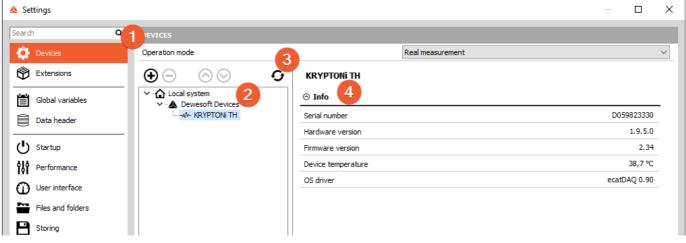


Real measurement mode

KRYPTON® V20-1 16/142



# 3.5. Firmware upgrade

- Download the <u>Dewesoft upgrade package</u> (.dxu file) from the Dewesoft downloads page under the section Drivers.
- As the file is zipped, you need to first unzipped it and then copied it into the Firmwares folder of your DewesoftX® installation (e.g. D:\DewesoftX\System\Firmwares).
- Connect the Dewesoft instrument to the PC and run DewesoftX®.
- Go to settings under the Update tab:

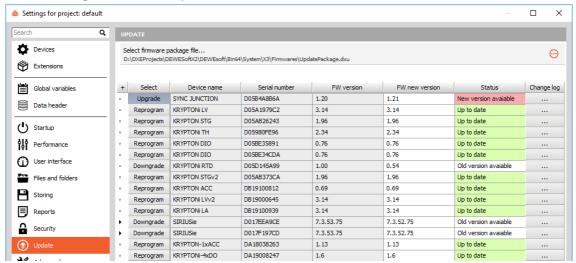

Update options

- If the firmware package isn't selected, select it by pressing the button and find the folder with the firmware file in it.
- Select the device you want to upgrade and start the firmware upgrade by pressing the "Upgrade" button.


KRYPTON® V20-1 17/142



# 3.6. Licensing

Krypton or any other Dewesoft device already comes with an embedded Dewesoft license. You can check the license details with all the available options in the Licensing tab 1 by pressing the three dotted buttons 3. However if the user decides to upgrade the license with an additional extension, DewesoftX® will require a new license registration. The registration can be made online 2 or offline by importing an offline license 3 in case the system doesn't have an internet connection. Offline license can be pre-registered on a different PC with the internet connection. If needed, the license can also be written on the actual device 3.

Active and embedded licenses are seen under the Active licenses tab. If the license is recognized as none active, it usually means that the wrong license was entered.

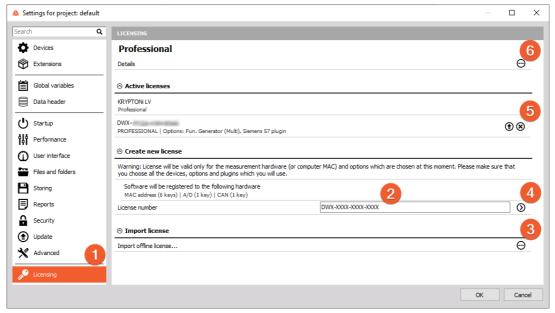

Licensing options



#### Hint

All licenses regarding Krypton will only work when the Krypton system is connected to your PC and the device has been activated in the hardware setup.

KRYPTON® V20-1 18/142




# 3.7. Troubleshooting

If your Krypton device is not found by DewesoftX®:

- If you did not restart Windows after the software installation, restart now
- Make sure that you have started Dewesoft version X3 SP8 or higher
- Make sure that the external power supply is connected and okay
- Disconnect the EtherCAT cable and reconnect it. If this does not work, try to connect the EtherCAT cable to another Ethernet port of your PC
- Try to restart DewesoftX®
- Try to restart the PC
- Make sure to connect the data-cable directly to the Ethernet card of your PC. Do not use any switches or hubs

If the computer is still having trouble recognizing the Dewesoft EtherCAT devices, here are some additional steps:

• Check if there is an Ethercat DAQ Filter driver installed on your computer as shown in the picture below. If the driver is installed, make sure the checkbox is checked in front of the driver.

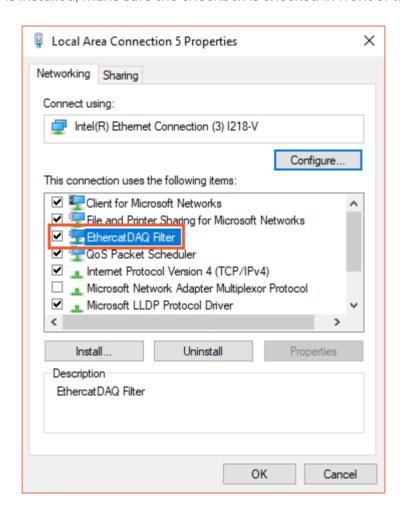

KRYPTON® V20-1 19/142




If the driver is not installed, it can be downloaded from our web page.

#### EthercatDAQ Filter Driver v0.90

Signed drivers (ver. 0.90 / 06/04/2017) for all Dewesoft EtherCAT devices. Works on Microsoft Windows 7, 8 and 10 (32 and 64 bit OS). Works only with Dewesoft X2 SP8 or newer. Warning: Please uninstall the old EthercatDAQ driver version before installing the new one.

- If the driver is already installed and the devices are still not recognized, the Speed & Duplex of the network card needs to be adjusted manually.
  - Go to network connections
  - o Right-click on the connection where the EtherCAT devices are connected
  - Go to configure, advanced options, find Speed & Duplex, change the value to 100 Mbps Full Duplex, since EtherCAT is a standard defined for 100Mbit/s

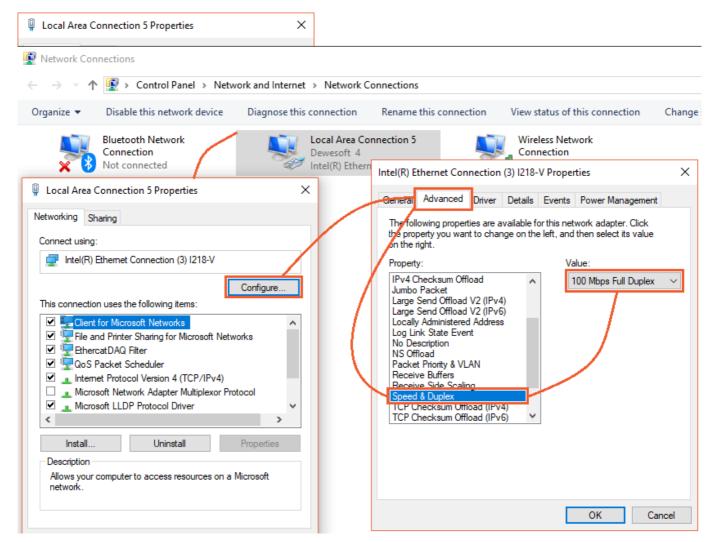

• In case Windows 7 is used, it needs to be updated to Service pack 1 which accepts the 256-bit certificates. You can find the proper update versions on the Microsoft web page, for both the 32-bit and 64-bit versions.

KRYPTON® V20-1 20/142



# 4. System overview

# **KRYPTON®**

Rugged and distributed EtherCAT data acquisition system for field measurement in extreme and harsh environments. KRYPTON DAQ systems offer IP67 degree of protection and can operate in the extreme temperature range from -40 to +85 °C and offer high shock protection.





Voltage



Strain / Stress

IEPE



Quarter Bridge



Half Bridge



Full Bridge



Thermocouple



Digital IO

Resistance



DSI Compatible



Charge



TEDS Compatible



Current



**EtherCAT** 



100 g

Shock rating



IP67



RTD



-10 °C to +50 °C

KRYPTON® V20-1 21/142



### 4.1. Main features

**DISTRIBUTED DAQ:** KRYPTON DAQ modules were designed for distributed measurements to bring data acquisition closer to sensors. This introduces many advantages as opposed to traditional DAQ systems. KRYPTON allows distributing DAQ units down to a single channel.

**ETHERCAT DAQ:** EtherCAT protocol with 100Mb/s bus speed is used for data transmission, data synchronization, and power supply. Kryptons are connected with a single cable for data, power, and sync.

**UP TO 100m BETWEEN UNITS:** KRYPTON units can be distributed over the large area with the distances up to 100 meters between DAQ nodes.

**RUGGED IP67:** All KRYPTON modules are rugged with the IP67 degree of protection and ready for testing in extreme weather and harsh environments.

1, 3, 4, 6, 8 and 16 CHANNEL UNITS: KRYPTON DAQ modules are available in various configurations spanning from tiny single channel units up to bigger 16-channel units. Instruments can be distributed down to the single channel.

**UP TO 40 kHz/CH SAMPLING RATE:** Most KRYPTON ONE channel units can achieve in the EtherCAT line sampling rate up to 40 kS/second. Most KRYPTON MULTICHANNEL units can achieve in the EtherCAT line sampling rate up to 20 kS/second.

**UNIVERSAL ANALOG INPUTS:** Universal analog inputs are available that can accept voltage and full/half/quarter bridge signals natively as well as IEPE, charge, thermocouples, RTD, current, resistance and LVDT signals with the use of DSI adapters.

**SOFTWARE INCLUDED WITH FREE LIFETIME UPGRADES:** Easy to use, yet very robust in functionality, award-winning DewesoftX® software is included. The software comes with lifetime free upgrades and no hidden costs, bringing you intuitive configuration, smart sensors, advanced storage and analysis capabilities.

### 4.1.1. EtherCAT Distributed DATA Acquisition

KRYPTON data acquisition systems are using 100 Mbit/s datalink based on EtherCAT protocol technology. Fast data bus allows many of the KRYPTON units to be daisy-chained together in the single measurement chain. At the end of the chain, RJ45 cable is used to plug into the Ethernet port of your PC computer or special, more rugged 8-pin LEMO connector to connect to our robust, powerful computers like KRYPTON CPU, SBOX, R2DB, R4 or R8.

EtherCAT brings another big advantage - zero configuration. KRYPTON devices do not require any complex IP setup. Simply connect them together into PC and DewesoftX® software will recognize and setup devices automatically.

There is the single cable required for data, power, and synchronization which can run up to 100 meters (328 feet) from module to module connecting amplifiers together.

KRYPTON® V20-1 22/142



### 4.1.2. Small and Flexible Data Acquisition

KRYPTON data acquisition modules are designed to be small, rugged and modular especially made perfect for field measurements in any environment. The small size of KRYPTON modules allows them to fit perfectly in tight places and can be placed very near the sensors.

Traditional data acquisition systems are big boxes with many input channels, which means long and expensive sensor cabling is needed in order to perform data acquisition.

KRYPTON takes the opposite approach. We kept the same advantages of other Dewesoft DAQ devices like plug and play and sensor auto-detection), but with KRYPTON we are bringing data acquisition systems closer to the origin of data - near the sensors. This greatly reduces the **cost of the sensor cabling**, chances of wiring errors and greatly **improves the signal quality.** 



KRYPTON-8xACC

### 4.1.3. Robust and rugged Data Acquisition

KRYPTON DAQ modules are extremely robust. We machine each one out of aluminum bricks and install industrial-grade electronics. Units are then sealed with thermally conductive and electrically insulative rubber. As a final touch, we add rubber bands around the KRYPTON chassis to further protect the unit from the shocks. The result is an **IP67 degree of protection**. Units are waterproof, shockproof, and can withstand **shocks up to 100G**.

KRYPTON can operate in extremely harsh environments and is rated to work in a temperature span from **-40°C to +85 °C**.

Extensive testing in our laboratories ensures bulletproof quality and worry-free testing under extreme conditions.

KRYPTON® V20-1 23/142



### 4.1.4. High-end signal conditioning

KRYPTON is not just small and rugged but also has quality analog amplifiers for precise signal measurement. An array of different modules are available for almost any sensor:

- **STG**: Universal differential voltage and Full / Half / Quarter bridge input. Available in 1, 3 and 6 channel configurations. Compatible with DSI adapters.
- **TH**: Universal isolated thermocouple input module. Accepts all thermocouple types. Available in 8 and 16 channel configurations and as a single channel for high voltage thermocouple measurements.
- **RTD**: Universal differential PTx temperature, resistance and voltage. Available in 8 and 16 channel configurations.
- **LV**: Isolated voltage input module. Available in 1, 4 and 8 channel configurations.
- **LA**: Isolated low current measurement module. Available in 8 channel configuration.
- **ACC** IEPE accelerometer and microphone input unit in 1, 4 and 8 channel configuration.
- DI / DO Digital I/O module. Available in 4xDI, 4xDO,
   16xDI, 16xDO or 8xDI/8xDO channel configurations.
- **AO** analog output is available in single-channel configurations.
- **CNT** a single channel DewesoftX's SUPERCOUNTER® module.



KRYPTON-6xSTG

KRYPTON® V20-1 24/142



### 4.1.5. KRYPTON ONE - Single channel Data Acquisition

KRYPTON ONE is the latest addition of rugged DAQ modules in the KRYPTON family line. KRYPTON ONE is the smallest IP67 DAQ module in the world. The pocket-size allows the modules to be mounted in tight places, right next to the sensors. Units are highly distributable, connected with a single cable for power, data, and synchronization.

KRYPTON ONE data acquisition modules are completely compatible with every other KRYPTON, SIRIUS and other data acquisition systems from Dewesoft.



KRYPTONi-1xACC

Main characteristics of KRYPTON ONE modules:

- The fastest KRYPTON: single-channel architecture allows a maximum sample rate of 40 kS/sec.
- Isolation: all analog KRYPTON ONE modules are fully isolated.
- Current input: 1xSTG includes an internal shunt for two current input ranges (20 mA, 2 mA).
- High current drive: 4xDO is capable of sinking 2 A current to drive high loads.
- Easy stacking: modules can be stacked and tightened together with M4 hex key screws.3.1.6. Works with 3rd-party Real-Time EtherCAT Master

The entire KRYPTON product line can be used with any 3rd-party real-time EtherCAT master for real-time data acquisition and control applications.

Because KRYPTON offers perfect signal conditioning and offers very rugged distributed units it is a perfect device that can be used in most demanding real-time test and control applications.

#### 4.1.6. DAQ Synchronization

KRYPTON data acquisition hardware is capable of acquiring different signals like voltage, bridge, IEPE, thermocouple, digital, and more. With included DewesoftX® software, you can easily acquire data from additional interfaces like GPS, Flexray, Ethernet, Serial, PCM telemetry, and many more.

Even though each data source can have different sampling rates (software selectable for each channel), all data is always perfectly synchronized down to microsecond accuracy. The synchronization between KRYPTON modules runs through the same cable as power and data.

KRYPTON DAQ modules can also be combined and synchronized with our fast USB DAQ devices like **SIRIUS**, **IOLITE**, **MINITAURS** or **DEWE-43-A**. For this we have a small accessory called **EtherCAT SYNC JUNCTION**. This box will provide a clock source for synchronization. External timing sources like GPS or IRIG can be connected and used.

KRYPTON® V20-1 25/142



# 4.2. General specifications

Interface	
Data interface	EtherCAT®
Data Rate	100 Mbps Full Duplex bus speed
Max. Throughput per Chain	From 6 MB/s to 10 MB/s
Sync Accuracy	below 1 sample to Sirius®
EtherCAT®	Max. Cable Length 100 m
Max. Number of Units	64 or more (power injectors may be required)
Data Interface Connection	LEMO 1T EtherCAT® hybrid cable Single cable for data, power and sync, daisy chainable
Power	
Power Supply	9 - 48 V DC
Environmental	
Operating Temperature	-40 to 85°C
Storage Temperature	-40 to 85°C
Humidity	5 to 100 % RH
IP rating	IP65 / IP67
Shock	Shock: SIST EN 60068-2-27:2009 100 g, 6 ms, half-sine 100x pos./neg in each axis 600x total
Vibration	Random vibration: MIL-STD-202G Method 214A, test condition II-D Profile breakpoints: 50 Hz @ 0.025 g²/Hz 100 Hz @ 0.1 g²/Hz 2000 Hz @ 0.1 g²/Hz Profile RMS / Peak = 13.9 g / 41.7 g 8 hrs in each axis, 24 hrs total

KRYPTON® V20-1 26/142



# 5. Krypton modules

KRYPTON are small, rugged and modular data acquisition modules for field measurements and harsh environments. Traditional DAQ systems are single boxes with many input channels, which means long and expensive sensor cabling is needed. Krypton takes the opposite approach. We kept the same advantages of other Dewesoft DAQ devices (plug and play, sensor auto-detection), but we are bringing DAQ units closer to the origin of data - near the sensors. That greatly reduces the cost of the sensor cabling, chances of wiring errors and greatly improves the signal quality.

Krypton DAQ modules are extremely robust. We machine each one out of aluminium bricks and install industrial grade electronics. Units are then sealed with thermally conductive and electrically insulative rubber. As a final touch we add rubber bands around the Krypton chassis to further protect the unit from the shocks. The result is IP67 degree of protection. Units are waterproof, vibration proof, and can withstand shocks up to 100 G. Krypton can operate in extremely harsh environments and is rated to work in a temperature span from -40 °C to +85 °C. Extensive testing in our laboratories ensures bulletproof quality and worry-free testing under extreme conditions.

KRYPTON DAQ modules are designed to be as small as possible and very flexible. Their small size allows them to fit perfectly in tight places and can be placed near the sensors. This results in short sensor cables which will not only save cost but also improve the signal quality.

KRYPTON® V20-1 27/142



# 5.1. Overview

# **5.1.1. KRYPTON Multichannel**


	STG	TH	RTD	ACC	LV	LA	DIO
Connectors	DB9, L2B10f	Thermocouple	LOB6f	BNC	BNC	BNC	DB25
#ch per module	3x, 6x	8x, 16x	8x	4x, 8x	4x, 8x	8x	16xDI, 16xDO 8xDI, 8xDO
Data rate / channel	20 kS/sec	100 S/sec	100 S/sec	20 kS/sec	20 kS/sec	20 kS/sec	20 kS/sec
Resolution			24-bit				digital
Bandwidth	0.49 fs	-	-	0.49 fs	0.49 fs	0.49 fs	-
Voltage ranges	±10 V, ±1 V, ±100 mV, ±10 mV	±1 V, ±100 mV	±1 V, ±100 mV	±10 V, ±5 V, ±1 V, ±200 mV	±50 V	±20 mA	CMOS compatible
Input coupling	DC	DC	DC	DC, AC 0.1 Hz, 1 Hz	DC	DC	DC
Sensor excitation	015 V max. 0.4 W/ch (45 mA limit)	-	-	IEPE 4 mA, 8 mA	-	-	5 V / 300 mA 12 V / 120 mA Vsupply / 200 mA
Bridge connection	Full, ½, ¼ 350 Ω, ¼ 120 Ω 3 wire	-	-	-	-	-	-
Programmable shunt	100 kΩ	-	-	-	-	-	-
IEPE input	DSI-ACC	-	-	✓	-	-	-
Resistance	-	-	10 kΩ	-	-	-	-
Temperature (PTx)	DSI-RTD	-	PT100, 200, 500, 1000, 2000	-	-	-	-
Thermocouple	DSI-TH	K, J, T, R, S, N, E, C, B	-	-	-	-	-
Potentiometer	✓	-	-	-	-	-	-
LVDT	DSI-LVDT	-	-	-	-	-	-
Charge	DSI-CHG	-	-	-	-	-	-
Current	ext. shunt DSI-20mA, DSI-5A	-	-	ext. shunt	-	-	-
TEDS	✓	-	-	✓	-	-	=
Isolation voltage	Differential	1000 V	1000 V	Differential	1000 V	1000 V	250 V
Power consumption per module	2.4 W (4 W 120 Ω @ 5 V load) 3xSTG; 5.9 W (8.9 W 120 Ω @ 5 V load) 6xSTG	2.5 W (8xTH) 4 W (16xTH)	2.5 W	4.6 W	3.5 W (4xLV) 6.7 W (8xLV)	6.8 W	2 W
Advanced functions	Supports all strain types, TEDS support	High isolation, support of main TC types	High isolation	TEDS support	High isolation, high input range	High isolation, 4-20 mA current loop	-


KRYPTON® V20-1 28/142




# 5.1.1.1. Krypton single width

# KRYPTON - single

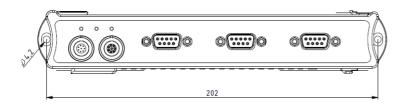



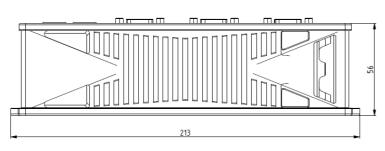



All dimensions are in mm.


Dimensions: Krypton single


KRYPTON® V20-1 29/142




# 5.1.1.2. Krypton dual width

# KRYPTON - dual

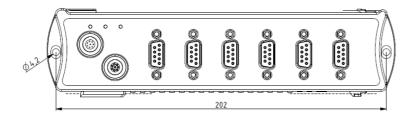



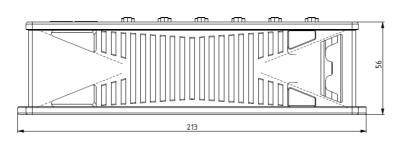



All dimensions are in mm.

Dimensions: Krypton dual

KRYPTON® V20-1 30/142




## **5.1.2. KRYPTON ONE**

	AO	DI	DO	ACC	STG	LV	HV	TH-HV	CNT
Input / Output types	Output: Voltage	Input: Digital	Output: Digital	Input: Voltage, IEPE	Input: Voltage, Strain	Input: Voltage	Input: Voltage	Input: Thermocou ple	Input: Digital
Number of channels per module	1	4	4	1	1	1	1	1	1
Connector	BNC	DSUB15 HD Male	DSUB15 HD Female	BNC	DB9	BNC	Banana jack	K-type Thermocou ple LEMO REDEL	LEMO T-type 7pin female
Data rate per channel		40 kS/sec	-	40 kS/sec	40 kS/sec	40 kS/sec	40 kS/sec	100 S/sec	20 kS/sec
Resolution	18 bit	Digital	Digital	24-bit	24-bit	24-bit	24-bit	24-bit	100 MHz timebase 5 ppm, 20 ppm max
Bandwidth		-	-	0.49 fs	0.49 fs	0.49 fs	0.49 fs	0.49 fs	10 MHz
Alias-free Bandwidth	-	-	-	0.453 fs	0.453 fs	0.453 fs	0.453 fs	0.453 fs	-
Alias Rejection	-	-	-	-100 dB (all sample rates)	-100 dB (all sample rates)	-100 dB (all sample rates)	-100 dB (all sample rates)	-100 dB (all sample rates)	-
Delay Through ADC	-	-	-	37 / fs	37 / fs	37 / fs	37 / fs	37 / fs	-
Oversamplin g	-	-	-	32	32	32	32	32	-
Voltage ranges	±10 V	Digital (Low: < 1 V, High: > 2 V)	-	±10 V ±5 V ±1 V ±200 mV	±50 V ±10 V ±1 V ± 100 mV	±50 V ±10 V ±1 V ±100 mV	±1000 V	Thermocou ple	TTL (Low: <0.8 V, High > 2 V)
Isolation	-	Galvanic isolation CH, GND	Galvanic isolation CH, GND	125 Vrms Isolation CH, GND	125 Vrms Isolation CH, GND	125 Vrms Isolation CH, GND	CAT III 600 V CAT II 1000 V	CAT III 600 V CAT II 1000 V	-
Power supply	9 - 50 V	9 - 50 V	9 - 50 V	9 - 50 V	9 - 50 V	9 - 50 V	9 - 50 V	9 - 50 V	9 - 50 V
Power consumption	2 W	1.5 W	2 W	2 W	3 W	1.5 W	1 W	1.3 W	1.2 W
Operating temperature	-40 to 85 °C	-40 to 85 °C	-40 to 85 °C	-40 to 85 °C	-40 to 85 °C	-40 to 85 °C	-40 to 85 °C	-40 to 85 °C	-40 to 85 °C
Storage temperature	-40 to 85 °C	-40 to 85 °C	-40 to 85 °C	-40 to 85 °C	-40 to 85 °C	-40 to 85 °C	-40 to 85 °C	-40 to 85 °C	-40 to 85 °C
Dimensions	62 x 56 x 29 mm	62 x 56 x 29 mm	62 x 56 x 29 mm	62 x 56 x 29 mm	62 x 56 x 29 mm	62 x 56 x 29 mm	62 x 56 x 36 mm	62 x 56 x 36 mm	62 x 56 x 29 mm
Weight	250 g	250 g	250 g	250 g	250 g	250 g	300 g	300 g	250 g

KRYPTON® V20-1 31/142



# 5.1.2.1. Krypton ONE form factor

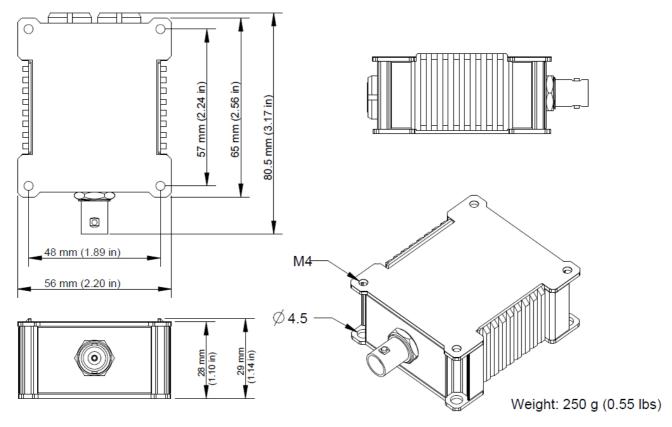

Dimensions: KRYPTON one


KRYPTON® V20-1 32/142



# 5.1.3. General connection diagrams

In illustration below "Typical connection diagrams" parts of the measurement chain are shown:

- Amplifier
- Connections
- Sensor

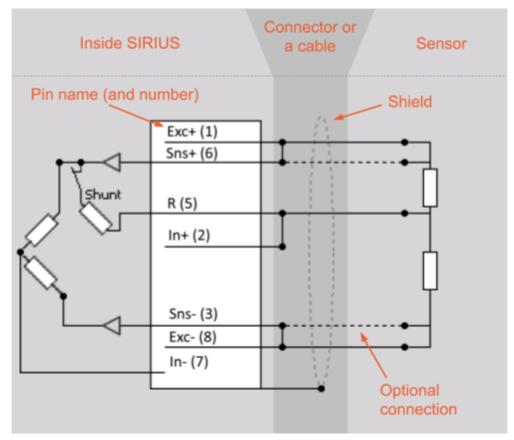

Typical connection diagrams

## 5.2. ACC: Accelerometer

The ACC modules have BNC input connectors and are perfect for sound and vibration IEPE channels.

KRYPTON® V20-1 33/142



# 5.2.1. ACC: specifications

# KRYPTON-4xACC, 8xACC

Analog inputs	KRYPTON-4x	KRYPTON-4xACC, KRYPTON-8xACC				
Input type	Voltage, IEPE					
Number of channels	4 (4xACC), 8 (8xACC)					
ADC Type	24-bit delta-s	igma with anti-alias	sing filter			
Sampling Rate	Simultaneous	s 20 kS/sec per char	nel (software-select	able)		
Voltage Ranges	±10 V	±5 V	±1 V	±200 mV		
Input Accuracy	±0.03 % of rea	ding ±0.02 % of ran	ge ±0.2 mV			
Typical Dynamic Range @ 10 kS/sec	-140 dB	-137 dB	-138 dB	-134 dB		
Typical noise floor @ 10 kS/sec	-106 dB	-106 dB	-106 dB	-102 dB		
Type. THD (20 kS/sec, -1 dBFS sine wave @ 1 kHz)	-94 dB	-94 dB	-93 dB	-95 dB		
Type. SFDR (10 kS/sec, -1 dBFS sine wave @ 1 kHz)	96 dB	96 dB	96 dB	93 dB		
Gain Drift	TBD		•	•		
Offset Drift	TBD					
Gain Linearity	TBD					
Input Coupling	DC, AC 0.1 Hz,	1 Hz				
Input Impedance	1 ΜΩ					
Overvoltage Protection	In+ to In-: 50 V continuous, 200 V peak (10 msec)					
Analog input performance						
Bandwidth (-3 dB)	0.49 fs	0.49 fs				
Alias-free Bandwidth	DC to 0.453 fs					
Alias Rejection	-100 dB (all sample rates)					
Delay Through ADC	37 / fs					
Oversampling	32					
IEPE input						
Excitation	4 mA, 8 mA					
Compliance voltage	25 V					
Output Impedance	>100 kΩ					
Sensor detection	Shortcut: <4\	/; Open: >19 V				
Additional Specifications						
Input connector	BNC					
TEDs support	IEPE mode only					
Environmental rating (see 1)	IP67					
Amplifier type	KRYPTON-4xACC KRYPTON-8xACC					
Power Consumption	3 W		4.6 W			
Weight	700 g		1000 g			
Slice Dimensions	213 x 39 x 56 r	nm	213 x 54 x 56 r	nm		
Dimensions with Connectors	213 x 39 x 66.8 mm 213 x 54 x 66.8 mm					

<sup>1)</sup> Depending on the mating connector types

KRYPTON® V20-1 34/142



## KRYPTONi-1xACC

Analog inputs					
Input types	Voltage, IEPE				
Number of channels	1				
Input connector	BNC				
ADC Type	24-bit SAR with an	ti-aliasing filter			
Sampling Rate	Simultaneous 40 k	S/sec per channel	(software-selectable)	)	
Voltage Ranges	±10 V	±5 V	±1 V	±200 mV	
Typ. Input Accuracy	±0.03 % of reading	±0.02 % of range ±	0.1 mV	•	
Typ. SNR (10 kS/sec, -1 dBFS sine wave @ 1 kHz)	90 dB	90 dB	89 dB	88 dB	
Type. SFDR (10 kS/sec, -1 dBFS sine wave @ 1 kHz)	113 dB	110 dB	109 dB	106 dB	
Typ. Noise floor @ 10 kS/sec	-100 dB	-99 dB	-99 dB	-98 dB	
Typical CMR @ 400 Hz / 1 kHz	130 dB / 120 dB	122 dB / 119 dB	104 dB / 97 dB	90 dB/84 dB	
Gain Drift	typ. 10 ppm/K (max	x. 40 ppm/K)		•	
Offset Drift	typ. 0.3 µV/K + 5 pp	om of range/K (max	<. 2 μV/K + 10 ppm of	range/K)	
Gain Linearity	< 0.02 %				
Input Coupling	DC, AC 0.1 Hz, 1 Hz				
Input Impedance	1 ΜΩ				
Overvoltage Protection	In+ to In-: 50 V con	tinuous, 200 V pea	k (10 msec)		
Isolation	125 Vrms channel t	o ground isolation			
Analog input performance					
Bandwidth (-3 dB)	0.49 fs				
Alias-free Bandwidth	DC to 0.453 fs				
Alias Rejection	-100 dB (all sample rates)				
Delay Through ADC	37 / fs				
Oversampling	32				
IEPE input					
Excitation	4 mA, 8 mA				
Compliance voltage	24 V				
Output Impedance					
Sensor detection	Shortcut: <4 V; Ope	en: >19 V			
TEDS support	IEPE mode only				
Power					
Power consumption	2 W (typ.)				
Environmental					
IP rating	IP65 / IP67 (see 1)				
Physical					
Dimensions	62 x 56 x 29 mm				
Weight	250 g				
1) Depending on the mating connector types	•				

KRYPTON® V20-1 35/142



### 5.2.2. KRYPTON-8xACC

KRYPTON-8xACC module has 8 BNC connectors for voltage and IEPE measurements.



#### Caution

Inputs are single-ended, if isolation is required isolated sensors have to be used.



KRYPTON-8xACC

#### 5.2.3. KRYPTON-4xACC

KRYPTON-4xACC module has 4 BNC connectors for voltage and IEPE measurements.



### **Caution**

Inputs are single-ended, if isolation is required isolated sensors have to be used.



KRYPTON-4xACC

KRYPTON® V20-1 36/142



## 5.2.4. KRYPTONi-1xACC

Single channel isolated Krypton module with IEPE and voltage input. KRYPTONi-1xACC has a BNC connector.




KRYPTONi-1xACC



KRYPTON-1xACC can work with 50 kHz if it is the only one in the EtherCAT chain. This feature is useful for the microphone measurements where 50 kHz sampling rate is required.

## 5.2.5. ACC: Connectors



ACC connector: pin-out (BNC)


Pin	Name	Description
1	IN+	Input +
2	GND	Ground

KRYPTON® V20-1 37/142




# 5.2.6. ACC: Wiring diagrams

# 5.2.6.1. ACC: Voltage

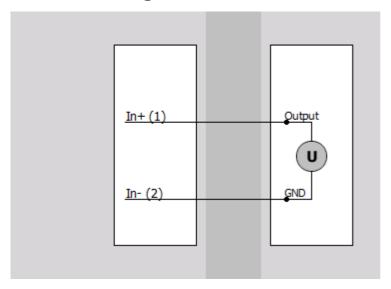

## 5.2.6.2. ACC: IEPE

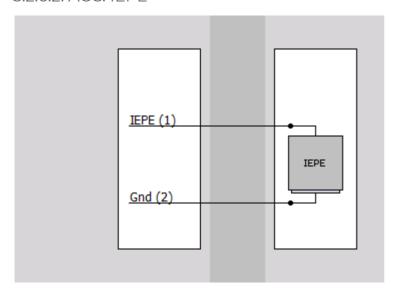

KRYPTON® V20-1 38/142



# 5.3. AO: Analog Out

Single channel analog output module has a BNC connector and is the perfect module for output of voltage levels, or slow analog signals, e.g. calculated channels.

# 5.3.1. AO: specifications

## KRYPTON-1xAO

REFION-IXAO			
Analog Output			
Output types	Voltage		
Number of channels	1		
Output connector	BNC		
DAC Resolution	18 bit		
Update Rate	1000 S/sec (see 1)		
Full Scale Output Range	±10 V (see 2)		
Accuracy (typ.)	0.1 % ±1 mV (0 to 20 mA load)		
Temperature gain drift (typ.)	±10 ppm/K		
Temperature offset drift (typ.)	±5 uV/K		
SNR @ 1000 S/s output rate	92 dB (sine wave, 250 Hz, ±9 V)		
THD	-90 dB		
Output impedance	0.45 Ω DC		
Maximum output current	20 mA		
Settling time (0.05 % of set value)	30 μs @ 1000 $\Omega$ load, -10 V to 10 V step		
Max slew rate	2.5 V/μs @ 1000 Ω load		
Max capacitive load (2 % overshoot)	10 nF		
Maximum load	500 Ω		
Output protection	Short circuit protected		
Isolation	-		
Power			
Power consumption	2 W (typ.)		
Environmental			
IP rating	IP65 / IP67 (see 3)		
Physical			
Dimensions	62 x 56 x 29 mm		
Weight	250 g		
) Only asynchronous mode is supported in Dewesoft, function generator is not supported			
2) Only DC output voltage, function generator not supported			
3) Depending on the mating connector types	3) Depending on the mating connector types		

KRYPTON® V20-1 39/142




## 5.3.2. KRYPTON-1xAO



KRYPTON - 1xAO

## 5.3.3. AO: connectors



ACC connector: pin-out (BNC)

Pin	Name	Description
1	Out +	Output +
2	Out -	Output -

KRYPTON® V20-1 40/142



# 5.4. CAN: Controller Area Network

KRYPTON CAN interfaces are intended for CAN-FD and CAN acquisition in harsh environments. KRYPTON CAN devices support OBDII, J1939 standard protocols and can output CAN messages.

## 5.4.1. CAN: specifications

## KRYPTONi-2xCAN-USB

	KRYPTONi-2xCAN USB	
CAN ports specification		
Number of ports	2	
Interface type	CAN 2.0B	
Interface data rate	up to 1 Mbit/sec	
Special protocols	OBDII, J1939, CAN out	
Sampling rate	> 10 kHz per channel Software selectable	
Galvanic isolation (Sensor supply not isolated)	Isolated	
Bus pin fault protection	±36 V	
Power specification		
Power supply	6 - 50 V DC Startup voltage 7 V	
Maximum sensor power consumption	5 W max total (max 3 W on 15 V)	
Maximum power consumption	5.5 W	
Environmental specification		
Interface	USB 2.0	
Connector type	9 pin D-SUB	
Physical dimensions	213 x 54 x 56 mm (slice) 213 x 54 x 71 mm (with connectors)	
Weight	1050 g 2.30 lbs	
Operating temperature	-20 °C to +60 °C	
Storage temperature -40 °C to +70 °C		
Humidity	-	
IP protection	IP65 / IP67	

KRYPTON® V20-1 41/142



# KRYPTONi-1xCAN, KRYPTONi-1xCAN-FD

CAN ports specification				
Number of ports	1	1		
Interface type	CAN 2.0B	CAN-FD, CAN 2.0B		
Interface data rate	up to 1 Mbit/sec	up to 8 Mbit/sec		
Special protocols	J1939	J1939		
Galvanic isolation	Isolated	Isolated		
Bus pin fault protection		±28 V		
Power specification				
Power supply	9 - 50 V DC	9 - 50 V DC		
Maximum sensor power consumption	3 W max total	max. 1.4 W (5 V / 12 V) (max. 1.2 W on 12 V)		
Maximum power consumption		max. 2 W (no load)		
Environmental specification				
Interface	EtherCAT, 100 Mbit/s Lemo 1T (1 cable for data, power and sync, daisy chainable)	EtherCAT, 100 Mbit/s Lemo 1T (1 cable for data, power and sync, daisy chainable)		
Connector type	DSUB-9	DSUB-9		
Physical dimensions	62 x 56 x 29 mm	62 x 56 x 29 mm		
Weight	200 g 0.44 lbs	200 g 0.44 lbs		
Operating temperature	-40 °C to +85 °C	-40 °C to +85 °C		
Storage temperature	-40 °C to +85 °C	-40 °C to +85 °C		
Humidity	-	-		
IP protection	IP65 / IP67	IP65 / IP67		

## 5.4.2. KRYPTONi-2xCAN-USB

KRYPTONi-2xCAN-USB has 2 CAN ports and it uses USB 2.0 as an interface.



KRYPTONi-2xCAN-USB

KRYPTON® V20-1 42/142



## 5.4.3. KRYPTONi-1xCAN

KRYPTONi-1xCAN is a single port CAN device that uses EtherCAT as an interface.



KRYPTONi-1xCAN

## 5.4.4. KRYPTONi-1xCAN-FD

KRYPTONi-1xCAN-FD is a single port CAN-FD device that uses EtherCAT as a data interface. The CAN-FD supports high-speed CAN interface with data rates up to 8 Mbps. KRYPTONi-1xCAN-FD has galvanically isolated communication lines and an isolated sensor supply of +5 V and +12 V. Power limit for the sensor supply is 1.4 W.




KRYPTONi-1xCAN-FD

KRYPTON® V20-1 43/142



# 5.4.5. CAN: connectors

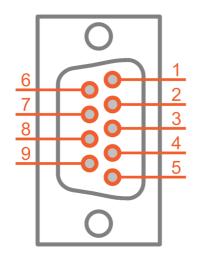

CAN connector: pin-out (DSUB-9 male)

Pin	Name	Description	
1	+5V	5 V supply max. current: 500 mA	
2	CAN_LOW	CAN low	
3	DGND	Digital Ground	
4	RES	Reserved	
5	RES	Reserved	
6	DGND	Digital Ground	
7	CAN_HIGH	CAN high	
8	RES	Reserved	
9	+12V	12 V supply max. current: 200 mA	

KRYPTON® V20-1 44/142



## 5.5. CNT: Counter

Single channel KRYPTON counter module utilizes a patented technology called SUPERCOUNTER® in every of its counter/encoder inputs and in the smallest possible form. It supports counting, waveform timing, encoder, tacho, gear-tooth sensor.

## 5.5.1. CNT: specifications

## KRYPTON-1xCNT

Counter	
Input type	Digital
Number of channels	1
Input connector	LEMO 1T series 7-pin
Timebase	100 MHz
Time base accuracy	Typical: 5 ppm, Max: 20 ppm
Max. bandwidth	10 MHz
Input Filter	500 ns, 1 μs, 2 μs, 4 μs, 5 μs and 7.5 μs
Input Level Compatibility	TTL (Low: < 0.8 V, High > 2 V)
Input impedance	100 kΩ pull-up to +3.3 V
Input Protection	±25 V continuous
Sensor supply	5 V / 100 mA, 12 V / 90 mA
Isolation	-
Non-Isolated Sensor Power Supply	
Output Voltage +5 V	5 V +/- 10 % 100 mA max.
Output Voltage +12 V	12 V +/-10 % 90 mA max.
Power	
Power consumption	1.2 W (typ.)
Physical	
Dimensions	62 x 56 x 29 mm
Weight	250 g

KRYPTON® V20-1 45/142




## 5.5.2. KRYPTON-1xCNT

KRYPTON-1xCNT has a LEMO 7-pin L1T7f connector.



KRYPTON-1xCNT

## 5.5.3. CNT: connectors



CNT connector: pin-out (7-pin LEMO female)

Connector type LEMO LIT7f
Mating connector: FGG.IT.307.CLAC45

Pin	Name	Description	
1	INO/A	Input A	
2	IN1/B	Input B	
3	IN2/Z	Input Z	
4	GND	Ground	
5	+5 V	5 V supply max. current: 100 mA	
6	+12 V	12 V supply max. current: 10 mA	
7	GND	Ground	

KRYPTON® V20-1 46/142



# 5.6. DIO: Digital Input/Output

KRYPTON digital input/output modules are perfect choices for control applications.

# 5.6.1. DIO: specifications

# KRYPTONi-16xDI, 8xDI-8xDO, 16xDO

	KRYPTONi-16xDI	KRYPTONi-8xDI-8xDO	KRYPTONi-16xDO
Digital Input			
Isolated Input Channels	16	8	-
Compatibility	CMOS Configuration		-
Input low level	UIN < 0.8 V		-
Input high level	UIN > 2.4 V		-
Input high current @ 5 V	UIN < 1.8 mA		-
Input high current @ 30 V	UIN < 6 mA		-
Propagation delay	<1 µs		-
Sampling rate	Simultaneous 20 kS/sec		-
Overvoltage protection	40 V continuous (65 V peak)		-
Isolation voltage peak	250 V channel/ground & channel	el/channel	-
Digital Output			
Isolated Output Channels	-	8	16
Compatibility	- Open collector with 10 kΩ pull-up to +5 V		up to +5 V
Maximum sink current	- 150 mA (not protected)		
Maximum switching voltage	- 50 V		
Propagation delay	-	- < 20 μs	
Maximum update rate	-	- depending on EtherCAT master	
Isolation voltage peak	- 250 V channel to ground, no channel to channel isolation		annel to channel isolation
General Specifications			
Environmental rating	IP67		
Power consumption	2 W		
Weight	700 g		
Slice Dimensions	213 x 39 x 56 mm		
Dimensions with Connectors	213 x 39 x 58.2 mm		

KRYPTON® V20-1 47/142



## KRYPTONi-4xDI

Digital Inputs	
Input type	Digital
Number of channels	4
Connector	DSUB15HD Male
Compatibility	TTL / CMOS Voltage Levels
Input low level	UIN < 1 V
Input high level	UIN > 2 V
Input high current @ 5 V UIN	3 mA typ.
Input high current @ 30 V UIN	6 mA typ.
Propagation delay	< 1 µs
Max. sampling rate	40 kS/sec
Overvoltage protection	30 V Continuous, 65 V peak
Isolation	Galvanic isolation CH, GND
Non-Isolated Sensor Power Supply	
Output Voltage +5 V	5 V +/- 10 % 300 mA max. (see 1)
Output Voltage +12 V	12 V +/-10 % 100 mA max. (see 1)
Output Voltage +Vecat	EtherCAT Bus Supply Voltage 200 mA max. (see 1)
Power	
Power consumption	1.5 W (typ.)
Physical	
Dimensions	62 x 56 x 29 mm
Weight	250 g
1) Max. combined load on +5 V and +12 V pins: 1.5 W re	educed by the load already present on +Vin pin

KRYPTON® V20-1 48/142



## KRYPTONi-4xDO

Digital Outputs		
Output type	Digital	
Number of channels	4	
Connector	DSUB15HD Female	
Maximum update rate	depends on EtherCAT master cycle time	
Output type	open collector with active internal pullup to 5 V	
Sink	max 50 V, 2 A (resistive load, unprotected)	
Source:	5 V, max. 40 mA (internally limited)	
Max. switching frequency for internal PWM	100 kHz	
Isolation	Galvanic isolation CH, GND	
Non-Isolated Sensor Power Supply		
Output Voltage +5 V	5 V +/- 10 % 300 mA max. (see 1)	
Output Voltage +12 V	12 V +/-10 % 100 mA max. (see 1)	
Output Voltage +Vecat	EtherCAT Bus Supply Voltage 200 mA max. (see 1)	
Power		
Power consumption	2 W (typ.)	
Physical		
Dimensions	62 x 56 x 29 mm	
Weight	250 g	
1) Max. combined load on +5 V and +12 V pins: 1.5 W reduced by the load already present on +Vin pin		




#### Hint

The PWM option is currently only supported on Krypton 4xDO devices. You can see the settings of the PWM signal in the 10.1. PWM output on Krypton 4xDO chapter.

## 5.6.2. KRYPTONi-16xDI

KRYPTONi-16xDI module has 16 digital input channels: 8 on each of the two 25-pin DSUB male connectors.

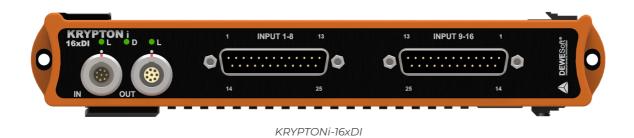


KRYPTON® V20-1 49/142



#### 5.6.3. KRYPTONi-16xDO


KRYPTONi-16xDO module has 16 digital output channels: 8 on each of the two 25-pin DSUB female connectors.

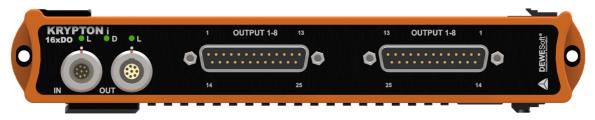

KRYPTONi-8xDI-8xDO

## 5.6.4. KRYPTONi-8xDI-8xDO

KRYPTONi-8xDI-8xDO module has 8 digital input channels (25-pin DSUB male connector) and 8 digital output channels (25-pin DSUB female connector).

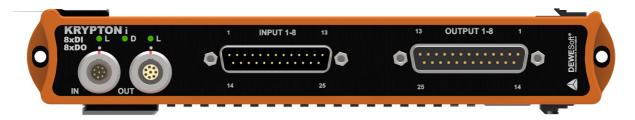

KRYPTONi-8xDI-8xDO

KRYPTON® V20-1 50/142



## 5.6.5. KRYPTONi-4xDI

KRYPTON ONE isolated module with 4 digital inputs and power supply on the front 15-pin DSUB male connector.



KRYPTONi-4xDI

## 5.6.6. KRYPTONi-4xDO

KRYPTON ONE isolated module with 4 digital outputs and power supply on the front 15-pin DSUB female connector. Output type is open collector with max 2 A sink current.




KRYPTONi-4xDO


KRYPTON® V20-1 51/142



## 5.6.7. DIO: connectors

## 5.6.7.1. KRYPTON Multichannel DIO modules: connectors

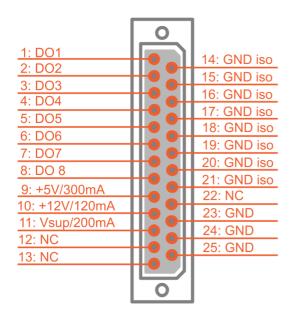

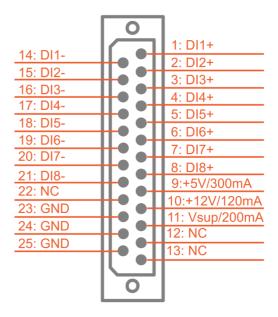

Digital output: DSUB-25 female

Digital input: DSUB-25 male

KRYPTON® V20-1 52/142



	8xDI		8xDO	
Pin	Name	Description	Name	Description
1	DI]+	Digital input CH1 +	D01	Digital output CH1
2	DI2+	Digital input CH2 +	DO2	Digital output CH2
3	DI3+	Digital input CH3 +	DO3	Digital output CH3
4	DI4+	Digital input CH4 +	DO4	Digital output CH4
5	DI5+	Digital input CH5 +	DO5	Digital output CH5
6	DI6+	Digital input CH6 +	DO6	Digital output CH6
7	DI7+	Digital input CH7 +	D07	Digital output CH7
8	DI8+	Digital input CH8 +	D08	Digital output CH8
9	+5V/300mA	5 V supply, max. 300 mA	+5V/300mA	5 V supply, max. 300 mA
10	+12V/120mA	12 V supply, max.120 mA	+12V/120mA	12 V supply, max. 120 mA
11	V <sub>supply</sub> /200mA	Supply voltage, max. 200 mA	V <sub>supply</sub> /200mA	Supply voltage, max. 200 mA
12	NC	-	NC	-
13	NC	-	NC	-
14	DII-	Digital input CH1 -	GNDiso	Isolated ground
15	DI2-	Digital input CH2 -	GNDiso	Isolated ground
16	DI3-	Digital input CH3 -	GNDiso	Isolated ground
17	DI4-	Digital input CH4 -	GNDiso	Isolated ground
18	DI5-	Digital input CH5 -	GNDiso	Isolated ground
19	DI6-	Digital input CH6 -	GNDiso	Isolated ground
20	DI7-	Digital input CH7 -	GNDiso	Isolated ground
21	DI8-	Digital input CH8 -	GNDiso	Isolated ground
22	NC	-	NC	-
23	GND	Ground	GND	Ground
24	GND	Ground	GND	Ground
25	GND	Ground	GND	Ground


#### Note

When using the supply from the Krypton module ( pin 9, 10 or 11) please keep in mind to connect the GND iso with GND


KRYPTON® V20-1 53/142



# 5.6.7.2. Krypton 4xDI and 4xDO connectors



DSUB-15 HD male for Krypton 4xDI



DSUB-15 HD female for Krypton 4xDO

		4xDI		4xD0
Pin	Name	Description	Name	Description
1	DI1 +	Digital input CH1 +	DO1	Digital output CH1
2	DI2 +	Digital input CH2 +	DO2	Digital output CH2
3	DI3 +	Digital input CH3 +	DO3	Digital output CH3
4	DI4 +	Digital input CH4 +	DO4	Digital output CH4
5	NC	-	Vext +	External voltage
6	DI1 -	Digital input CH1 -	GNDi	Isolated ground
7	DI2 -	Digital input CH2 -	GNDi	Isolated ground
8	DI3 -	Digital input CH3 -	GNDi	Isolated ground
9	DI4 -	Digital input CH4 -	GNDi	Isolated ground
10	NC	-	NC	-
11	+5V/300mA	5 V supply, max. 300 mA	+5V/300mA	5 V supply, max. 300 mA
12	+12V/130mA	12 V supply, max.130 mA	+12V/130mA	12 V supply, max.130 mA
13	GND	Ground	GND	Ground
14	GND	Ground	GND	Ground
15	V <sub>supply</sub> /200mA	Supply voltage, max. 200 mA	V <sub>supply</sub> /200mA	Supply voltage, max. 200 mA



#### Note

When using the supply from the Krypton module ( pin 9, 10 or 11) please keep in mind to connect the GND iso with GND

KRYPTON® V20-1 54/142



# 5.7. HV: High Voltage

Single channel high voltage input DAQ device. Isolation category is CATII 1000V.

# 5.7.1. HV: specifications

Analog Input	
Input types	Voltage
Number of channels	1
Input connector	4 mm safety banana jack
ADC Type	24-bit SAR with anti-aliasing filter
Sampling Rate	40 kS/sec (software-selectable)
Input range	±1000 V
Input accuracy	±0.03 % of reading ±0.2 V
Typ. Noise floor @ 10 kS/sec	-96 dB
Typ. Noise floor @ 40 kS/sec	-90 dB
Typ. CMR @ 400 Hz/1 kHz	
Gain Drift	
Offset Drift	
Gain Linearity	
Input Coupling	DC
Input Impedance	10 ΜΩ
Protection class	CAT III 600 V, CAT II 1000 V
Overvoltage Protection	+-2 kVpeak
Analog input performance	
Bandwidth (-3 dB)	0.49 fs
Alias-free Bandwidth	DC to 0.453 fs
Alias Rejection	-100 dB (all sample rates)
Delay Through ADC	37 / fs
Oversampling	32
Power	
Power consumption	1 W (typ.)
Environmental	
IP rating	IP65 / IP67 (see 1)
Physical	
Dimensions	62 x 56 x 36 mm
Weight	300 g
1) Depending on the mating connector types	<u>.</u>

KRYPTON® V20-1 55/142




## 5.7.2. KRYPTONi-1xHV

KRYPTONi-1xHV has two banana front connectors for single channel high voltage measurement.



KRYPTONi-1xHV

## 5.7.3. HV: connectors



HV connector: pin-out (Banana plug)


Pin	Name	Description
1	ln+	Input +
2	In-	Input -

KRYPTON® V20-1 56/142



# 5.7.4. HV: wiring diagrams

# 5.7.4.1. HV: Voltage

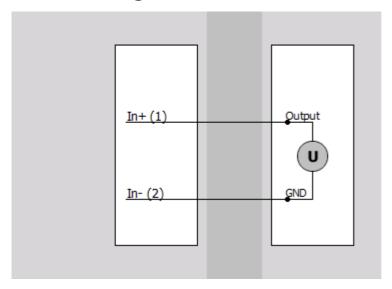

KRYPTON® V20-1 57/142



# 5.8. LA: Low Amperage

Kkrypton LA modules are rugged isolated DAQ devices for low amperage measurements.

# 5.8.1. LA: specifications

Analog input	KRYPTONi-8xLA
Input type	Isolated current
Number of channels	8
ADC Type	24-bit oversampled SAR with 41 kHz anti-aliasing filter
Sampling Rates	Simultaneous 20k, 10k, 5k, 2k, 1k, 500, 200, 100 S/sec (software-selectable)
Current Range	±20 mA
Accuracy	±0.02 % of reading ±8 μA
Typical noise floor @ 10 kS/sec	-95 dB
Crosstalk (20 kS/sec, -1 dBFS @ 1 kHz)	-124 dB
Gain Drift	Typical 10 ppm/K, max. 20 ppm/K
Offset Drift	Typical 100 nA/K, max. 200 nA/K
Gain Linearity	< 0.01 %
Input Coupling	DC
Input Impedance	50 Ω
Noise	0.3 µARMS
Overvoltage Protection	50 V
Analog input performance	
Bandwidth (-3 dB)	0.49 fs
Alias-free Bandwidth	DC to 0.453 fs
Alias Rejection	-100 dB (all sample rates)
Delay Through ADC	37 / fs
Oversampling	32
Additional Specifications	
Input Connector	BNC
Isolation Voltage	1000 Vpeak channel/ground & channel/channel
Environmental Rating (see 1)	IP67
Amplifier type	
Power Consumption	6.8 W
Weight	1000 g
Slice Dimensions	213 x 54 x 56 mm
Dimensions with Connectors	213 x 54 x 66.8 mm
1) Depending on the mating connector types	•

KRYPTON® V20-1 58/142




## 5.8.2. KRYPTONi-8xLA

KRYPTONi-8xLA has 8 BNC input connectors for current measurement.



KRYPTONi-8xLA

## 5.8.3. LA: connectors



BNC connector: pin-out (BNC)

GND		


Pin	Name	Description	
1	In+	Input +	
2	GND	Ground	

KRYPTON® V20-1 59/142



# 5.8.4. LA: wiring diagrams

# 5.8.4.1. LA: Current

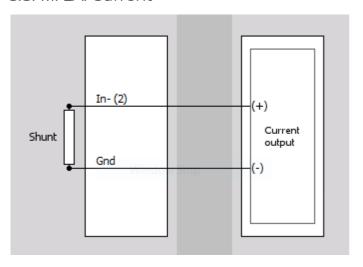

KRYPTON® V20-1 60/142



# 5.9. LV: Low Voltage

Krypton LV modules are rugged isolated DAQ devices for low voltage measurements.

## 5.9.1. LV: specifications

# KRYPTONi-4xLV, 8xLV

Analog input	KRYPTONi-4xLV	KRYPTONi-8xLV	
Input type	Isolated voltage		
Number of channels	4	8	
ADC Type	24-bit oversampled SAR with 41 kHz anti-aliasing filter		
Sampling Rates	Simultaneous 20k, 10k, 5k, 2k, 1k, 500, 200,	100 S/sec (software-selectable)	
Voltage Range	±50 V		
Accuracy	±0.03 % of reading ±5 mV		
Typ. SNR (10 kS/sec, -1 dBFS sine wave @ 1 kHz)	104 dB		
Typical noise floor @ 10 kS/sec	-106 dB		
Type. THD (10 kS/sec, -1 dBFS sine wave @ 1 kHz)	-104 dB		
Type. SFDR (10 kS/sec, -1 dBFS sine wave @ 1 kHz)	105 dB		
Typical CMR @ 400 Hz / 1 kHz	105 dB / 94 dB		
Gain Drift	Typical 10 ppm/K, max. 20 ppm/K		
Offset Drift	Typical 5 μV/K, max. 10 μV/K		
Gain Linearity	< 0.01 %		
Input Coupling	DC		
Input Impedance	1 ΜΩ		
Noise	0.7 mVRMS		
Overvoltage Protection	In+ to In-: 200 V continuous, 350 Vpeak (100	O msec)	
Analog input performance			
Bandwidth (-3dB)	0.49 fs		
Alias-free Bandwidth	Bandwidth (-3 dB)		
Alias Rejection	-100 dB (all sample rates)		
Delay Through ADC	37 / fs		
Oversampling	32		
Additional Specifications			
Input Connector	BNC		
Isolation Voltage	1000 Vpeak channel/ground & channel/channel		
Environmental Rating (see 1)	IP67		
Amplifier type	KRYPTONi-4xLV	KRYPTONi-8xLV	
Power Consumption	3.8 W	6.8 W	
Weight	700 g	1000 g	
Slice Dimensions	213 x 39 x 56 mm	213 x 54 x 56 mm	
Dimensions with Connectors	213 x 39 x 66.8 mm	213 x 54 x 66.8 mm	

<sup>1)</sup> Depending on the mating connector types

KRYPTON® V20-1 61/142



# KRYPTONi-1xLV

Analog input				
Input types	Voltage			
Number of channels	1			
Input connector	BNC			
ADC Type	24-bit SAR with anti-aliasing filter			
Sampling Rate	Simultaneous 40 kS/sec per channel (software-selectable)			
Voltage Ranges	±50 V	±10 V	±1 V	±100 mV
Input Accuracy	±0.03 % of reading,	±0.02 % of range, :	±0.1 mV	<u>.</u>
Typical SNR @ 10 kS/s	96 dB	96 dB	94 dB	88 dB
Typical Dynamic Range @ 10 kS	-130 dB	-132 dB	-137 dB	-138 dB
Typical Noise floor @ 10 kS	-108.3 dB	-102.6 dB	-107.2 dB	-100.1 dB
Gain Drift	Typical 10 ppm/K (r	max. 40 ppm/K)	·	
Offset Drift	Typical 0.3 μV/K + 5 ppm of range/K, max 2 μV/K + 10 ppm of range/K			
Gain Linearity	< 0.02 %			
Input Coupling	DC, AC 1 Hz			
Input Impedance	1 ΜΩ 20 ΜΩ			
Overvoltage Protection	200 V 50 V			
Isolation	125 Vrms channel to ground isolation			
Analog input performance				
Bandwidth (-3 dB)	0.49 fs			
Alias-free Bandwidth	DC to 0.453 fs			
Alias Rejection	-100 dB (all sample	rates)		
Delay Through ADC	37 / fs			
Oversampling	32			
Power				
Power consumption	1.5 W (typ.)			
Physical				
Dimensions	62 x 56 x 29 mm			
Weight	250 g			

KRYPTON® V20-1 62/142



## 5.9.2. KRYPTONi-8xLV

KRYPTONi-8xLV has 8 BNC input connectors for voltage measurement.



KRYPTONi-8xLV

## 5.9.3. KRYPTONi-4xLV

KRYPTONi-4xLV has 4 BNC input connectors for voltage measurement.



KRYPTONi-4xLV

KRYPTON® V20-1 63/142




## 5.9.4. KRYPTONi-1xLV

KRYPTONi-1xLV is a single channel low voltage module with BNC connector.



KRYPTONi-1xLV

## 5.9.5. LV: connectors



BNC connector:	pin-out	(BNC)
----------------	---------	-------


Pin	Name	Description
1	IN+	Input +
2	GND	Ground

KRYPTON® V20-1 64/142



# 5.9.6. LV: wiring diagrams

# 5.9.6.1. LV: Voltage

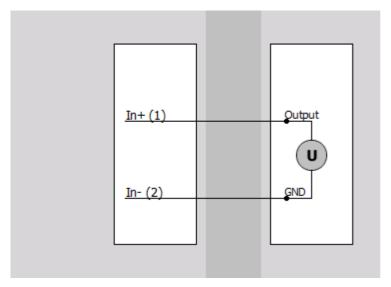

KRYPTON® V20-1 65/142



# 5.10. RTD: Resistance Temperature Detector

KRYPTON RTD module with 6-pin Lemo 0B input connectors is used for measurements with universal platinum thermometer probes, thermistors, as well as for resistance and voltage measurements.

## 5.10.1. RTD: specifications

## KRYPTONi-8xRTD

Analog inputs	KRYPTONi-8xRTD		
Input types	voltage, resistor or universal Ptxxx inputs	voltage, resistor or universal Ptxxx inputs	
Number of channels	8		
ADC Type	24-bit delta-sigma	24-bit delta-sigma	
Sampling Rate	Simultaneous 100 S/sec		
Voltage Ranges	±1 V	±100 mV	
Input Accuracy	$\pm 0.02$ % of reading $\pm 0.01$ % of range $\pm 10$ $\mu V$	±0.02% of reading ±0.01% of range ±10 μV	
Typical Noise floor @ 10/100 s/sec	-108 dB / -98 dB	-108 dB / -98 dB	
Gain Drift	Typical 3 ppm/K (max. 10 ppm/K)		
Offset Drift	Typical 0.05 μV/K (max. 0.2 μV/K)		
Gain Linearity	< 0.01 %		
Input Coupling	DC		
Input Impedance	1 ΜΩ	1 ΜΩ	
Temperature	PT500, PT1000, PT2000	PT100, PT200	
Measurement range	-200 °C to +850 °C	-200 °C to +850 °C	
Accuracy	±0.05 % of reading ±0.2 °C	±0.05 % of reading ±0.2 °C	
Temperature Drift	typ. ±5 ppm/K (max. ±12 ppm/K ±0.003 °C/k	<)	
Input Connection	3 wire or 4 wire		
Resolution	< 0.001 °C		
Resistance	010 kΩ	01 kΩ	
Accuracy	±0.02 % of reading ±0.01 % of range		
Input Connection	3 wire or 4 wire		
Resolution	-		
Additional Specifications			
Input connector	Lemo 0B 6pin EEA.0B.306.CLN		
Isolation voltage	1000 Vpeak channel/ground & channel/channel		
Environmental rating (see 1)	IP65	IP65	
Power consumption	2.5 W	2.5 W	
Weight	720 g		
Dimensions	213 x 39 x 58 mm		

<sup>1)</sup> Depending on the mating connector types

KRYPTON® V20-1 66/142




## 5.10.2. KRYPTONi-8xRTD



KRYPTONi-8xRTD

## 5.10.3. RTD: connectors



RTD connector: pin-out (6-pin LEMO)

Connector type LEMO L0B6f Mating connector: FGA.0B.306.CLAD52Z


Pin	Name	Description
1	In+	Input +
2	In-	Input-
3	Res	Do not connect
4	EXC+	Excitation +
5	EXC-	Excitation-
6	GND	Ground Isolated

KRYPTON® V20-1 67/142




# 5.10.4. RTD: wiring diagrams

# 5.10.4.1. RTD: Voltage

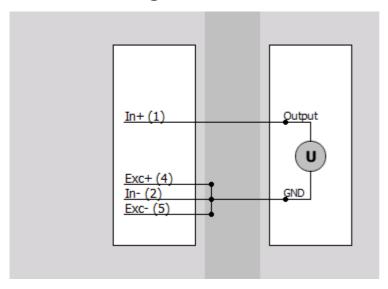


5.10.4.2. RTD: Resistance

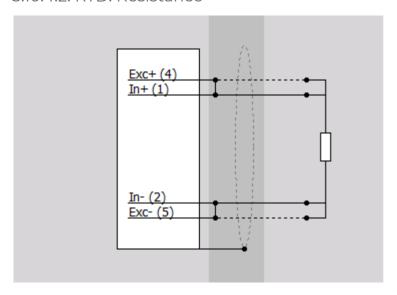


KRYPTON® V20-1 68/142



5.10.4.3. RTD: Temperature (3-wire)

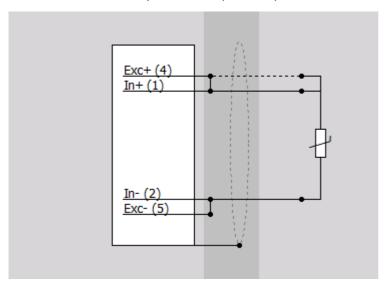

5.10.4.4. RTD: Temperature (4-wire)

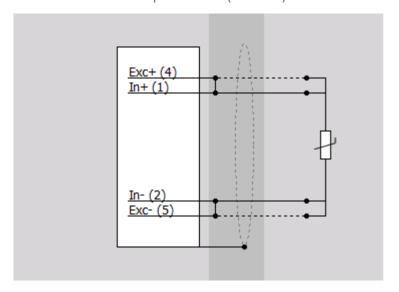

KRYPTON® V20-1 69/142



# 5.11. STG: Strain Gauge

KRYPTON STG modules have universal differential voltage and Full / Half / Quarter bridge input. STG modules are available in 1, 3 and 6 channel configurations and are compatible with DSI adapters.

# 5.11.1. STG: specifications

## KRYPTON-3xSTG, 6xSTG

Analog inputs	KRYPTON-3xSTG		KRYPTON-6xSTG	KRYPTON-6xSTG		
Input type	Voltage Full / half / quarter strain					
Number of channels	3		6			
ADC Type	24-bit oversampled SAR with 41 kHz anti-aliasing filter					
Sampling Rate	Simultaneous 20k, 10k, 5k, 2k, 1k, 500, 200, 100 S/sec (software-selectable)					
Voltage Ranges	±10 V	±1∨	±100 mV	±10 mV		
Input Accuracy	±0.03 % of reading, ±0.02 % of range, ±0.1 mV					
Typical Dynamic Range @ 10 kS/sec	-139 dB	-139 dB	-129 dB	-110 dB		
Typical Noise Floor @ 10 kS/sec	-106 dB	-105dB	-97 dB	-78 dB		
Typical CMR @ 400 Hz / 1 kHz	86 dB / 84 dB	96 dB / 95 dB	112 dB / 102 dB	112 dB / 102 dB		
Gain Drift	Typical 10 ppm/K (max. 40 ppm/K)					
Offset Drift	Typical 0.3 µV/K + 5 ppm of range/K, max 2 µV/K + 10 ppm of range/K					
Gain Linearity	< 0.02 %					
Input Coupling	DC					
Input Impedance	10 ΜΩ					
Overvoltage Protection	In+ to In-: 50 V continuous, 200 V peak (10 ms)					
Analog input performance						
Bandwidth (-3 dB)	0.49 fs					
Alias-free Bandwidth	DC to 0.453 fs					
Alias Rejection	-100 dB (all sample rates)					
Delay Through ADC	37 / fs					
Oversampling	32					
Excitation Voltage						
Excitation voltage	Free programmable (16-bit DAC)					
Predefined Levels	0, 1, 2.5, 5, 10 and 15 VDC					
Accuracy	±0.05 % ±2 mV					
Drift	±50 ppm/K ±100 μV/K					
Stability 10 % to 90 % Load	< 0.01 %					
Current Limit	45 mA (400 mW max. Power)					
Protection	Continuous short to ground					
Bridge Connection Types	full bridge strain, ½ bridge strain, ¼ bridge strain (3 wire)					
Ranges	21000 mV/V free programmable					
Internal Bridge Completion	$1/2$ bridge and $1/4$ bridge 120 and 350 $\Omega$					
Bridge Completion Accuracy	0.05 %; TCR: 2 ppm/K (others on request)					

KRYPTON® V20-1 70/142



Internal Shunt Resistor	100 k $\Omega$ (others on request)					
Shunt Resistor Accuracy	0.1 %; TCR: 10 ppm/K (others on request)					
Input Short, Sensor Offset Adjust	Software-selectable					
Additional Specifications						
Input connector	DB9; L2B10f					
TEDs support	Standard + DSI adapters					
Environmental rating	IP67					
Amplifier type	KRYPTON-3xSTG	KRYPTON-6xSTG				
Power Consumption	3.5 W (4.8 W 120 Ω @ 5 V load)	5.9 W (8.9 W load 120 Ω @ 5 V)				
Weight	740 g	1100 g				
Slice Dimensions	213 x 39 x 56 mm	213 x 54 x 56 mm				
Dimensions with Connectors	213 x 39 x 58.2 mm	213 x 54 x 58.2 mm				

KRYPTON® V20-1 71/142



## KRYPTONi-1xSTG

Analog input - Voltage							
Input types	Voltage, current, full b	Voltage, current, full bridge strain, half bridge strain, quarter bridge strain					
Number of channels	1						
Input connector	DB9						
ADC Type	24-bit SAR with anti-aliasing filter						
Sampling Rate	Simultaneous 40 kS/sec per channel (software-selectable)						
Voltage Ranges	±50 V	±10 V	±1 V	±100 mV			
Input Accuracy	±0.03 % of reading, ±0.02 % of range, ±0.1 mV						
Typical SNR @ 10 kS/sec	89 dB	88 dB	88 dB	87 dB			
Typical Dynamic Range @ 10 kS/sec	-100 dB	-110 dB	-130 dB	-145 dB			
Typical Noise floor @ 10 kS/sec	-103 dB	-99 dB	-103 dB	-96 dB			
Typical CMR @ 400 Hz / 1 kHz	71 dB / 66 dB	72 dB / 66 dB	96 dB / 88 dB	96 dB / 87 dB			
Gain Drift	Typical 10 ppm/K (max. 40 ppm/K)						
Offset Drift	Typical 0.3 µV/K + 5 ppm of range/K, max 2 µV/K + 10 ppm of range/K						
Gain Linearity	< 0.02 %						
Input Coupling	DC, AC 1 Hz						
Input Impedance	1 ΜΩ		20 ΜΩ	20 ΜΩ			
Overvoltage Protection	200 V		50 V				
Isolation	125 Vrms channel to ground isolation						
TEDS support	Standard + DSI adapters						
Analog inputs - Current							
Current ranges	20 mA		2 mA				
Input Accuracy	±0.03 % of reading, ±0.02 % of range, ±2.1 µA						
Internal Shunt Resistor	50 Ω						
Analog input performance							
Bandwidth (-3 dB)	0.49 fs						
Alias-free Bandwidth	DC to 0.453 fs						
Alias Rejection	-100 dB (all sample rates)						
Delay Through ADC	37 / fs						
Oversampling	32						
Excitation Voltage							
Excitation voltage	Free programmable (16-bit DAC)						
Predefined Levels	Unipolar 0 - 24 V, Bipolar 0 - 12 V						
Accuracy	±0.05 % ±2 mV						
Drift	±50 ppm/K ±100 μV/K						
Stability 10 % to 90 % Load	< 0.01 %						
Current Limit	42 mA (400 mW max. Power)						
Protection	Continuous short to ground						
Bridge Connection Types	full bridge strain, ½ b	ridge strain, ¼ bridge	e strain (3 wire)				


KRYPTON® V20-1 72/142



Weight	250 g
Dimensions	62 x 56 x 29 mm
Physical	
Power consumption	2.8 W (typ.)
Power	
Input Short, Sensor Offset Adjust	Software-selectable
Shunt Resistor Accuracy	0.1 %; TCR: 10 ppm/K (others on request)
Internal Shunt Resistor	100 k $\Omega$ (others on request)
Bridge Completion Accuracy	0.05 %; TCR: 2 ppm/K (others on request)
Internal Bridge Completion	$1\!\!\!/_2$ bridge and $1\!\!\!/_4$ bridge 120 and 350 $\Omega$
Bridge ranges	2010000 mV/V free programmable

## 5.11.2. KRYPTON-6xSTG

KRYPTON-6xSTG module has 6 DSUB-9 female connectors for voltage or strain measurement.

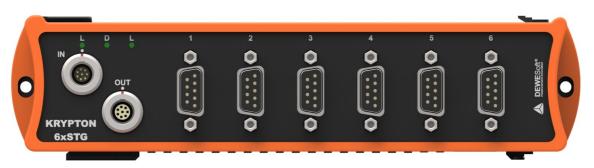

KRYPTON-6xSTG

#### 5.11.3. KRYPTON-6xSTG-L2B10f

KRYPTON-6xSTG-L2B10fs module has 6 LEMO L2B10fs connectors for voltage or strain measurement.




KRYPTON-6xSTG-L2B10f

KRYPTON® V20-1 73/142



## 5.11.4. KRYPTON-3xSTG

KRYPTON-3xSTG module has 3 DSUB-9 female connectors for voltage or strain measurement.

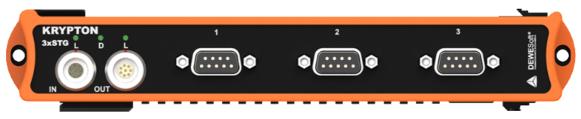

KRYPTON-3xSTG

## 5.11.5. KRYPTON-3xSTG-L2B10fs

KRYPTON-3xSTG-L2B10fs module has 3 LEMO L2B10fs connectors for voltage or strain measurement.



KRYPTON-3xSTG-L2B10fs

KRYPTON® V20-1 74/142




#### 5.11.6. KRYPTONi-1xSTG

KRYPTONi-1xSTG is the world's only single channel perfect strain gauge DAQ device. KRYPTONi-1xSTG is isolated and includes internal shunt for two current input ranges (20 mA, 2 mA). Module has one DSUB-9 female input connector.



KRYPTONi-1xSTG

### 5.11.7. STG: connectors

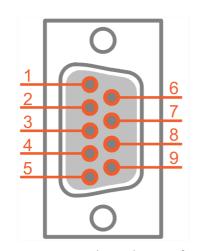


STG connector: pin-out (DSUB-9 female)

Pin	Name	Description
1	Exc+	Excitation +
2	ln+	Input +
3	Sns-	Sense-
4	GND	Ground
5	R+	½ Bridge/ Shunt
6	Sns+	Sense+
7	In-	Input-
8	Exc-	Excitation-
9	TEDS	TEDS

KRYPTON® V20-1 75/142





STG-L2B10fs connector: pin-out (10-pin LEMO female)

Pin	Name	Description
1	TEDS	TEDS
2	R+	¼ Bridge / Shunt
3	NC	Not connected
4	SNS-	Sense-
5	EXC-	Excitation-
6	SNS+	Sense+
7	EXC+	Excitation +
8	GND	Ground
9	IN-	Input-
10	IN+	Input +


KRYPTON® V20-1 76/142



# 5.11.8. STG: wiring diagrams


5.11.8.1. STG: Voltage

## Single ended

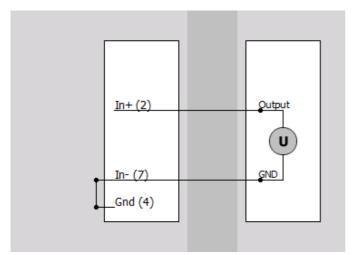

#### Differential

Use only when sensor Output (+) and Output (-) are referenced to Gnd. Gnd must be connected.

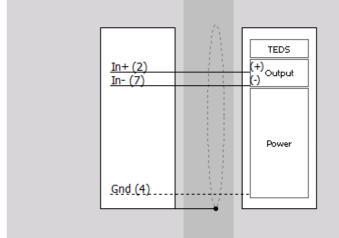


KRYPTON® V20-1 77/142




## 5.11.8.2. STG: Bridge


#### Full-bridge

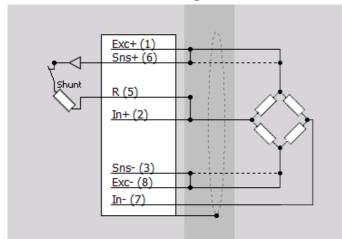

## Half-bridge

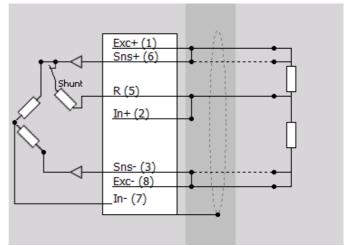

## **Quarter-bridge**

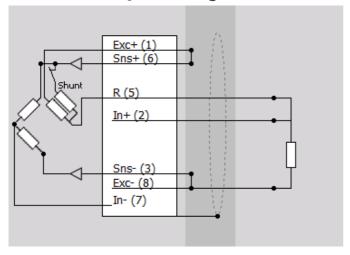


KRYPTON® V20-1 78/142




#### 5.11.8.3. STG: Current

#### **External direct shunt**

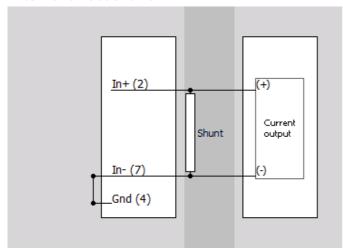


#### **External loop powered shunt**

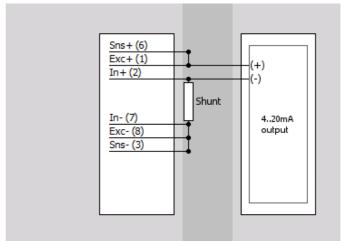

#### Internal shunt


This feature is limited only to KRYPTONi-1xSTG.

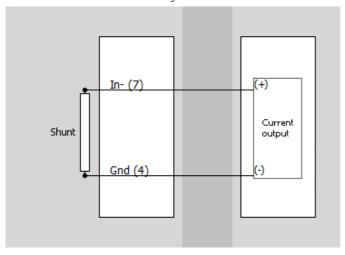

KRYPTON® V20-1 79/142



5.11.8.4. STG: Potentiometer

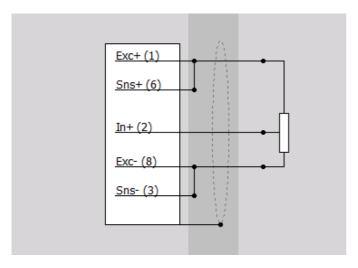

KRYPTON® V20-1 80/142



# 5.12. TH: Thermocouple

KRYPTON TH modules are isolated rugged DAQ devices for temperature measurements using thermocouples.

# 5.12.1. TH: specifications

## KRYPTONi-8xTH, 16xTH

Analog inputs	KRYPTONi-8xTH	KRYPTONi-16xTH	
Input type	Isolated universal thermocouple and voltage		
Number of channels	8 16		
ADC Type	24-bit delta-sigma		
±0.02 % of reading ±10 μV	Simultaneous 100 S/sec		
Voltage Ranges	±1 V	±100 mV	
Input Accuracy	±0.02 % of reading ±100 μV	±0.02 % of reading ±10 μV	
Typical Noise Floor @ 10 / 100 S/sec	-114 dB / -105 dB	-109 dB / -100 dB	
Gain Drift	Typical 3 ppm/K (max. 10 ppm/K)		
Offset Drift	0.03 μV/K		
Gain Linearity	< 0.01 %		
Input Coupling	DC		
Input Impedance	100 ΜΩ		
Thermocouple			
Input type	TC Types: K, J, T, R, S, N , E, C, B		
Accuracy	±0.02 % of reading ± 0.5 °C ± 10 μV		
Resolution	< 0.001 °C		
Sampling rates	100, 80, 40, 20, 10 S/sec		
Typical Noise	0.007 °C RMS @ Type K @ 10 S/sec		
Additional Specifications			
Input connector	Mini Thermocouple connector (copper)		
Isolation voltage	1000 Vpeak channel/ground & channel/channel		
Environmental rating (see 1)	IP67		
Amplifier type	KRYPTONi-8xTH KRYPTONi-16xTH		
Power consumption	2.5 W	4 W	
Weight	720 g	1000 g	
Dimensions	213 x 39 x 56 mm 213 x 54 x 56 mm		
1) Depending on the mating connector typ	es, for non corrosive liquids only, IP65 stand	dard	

KRYPTON® V20-1 81/142



#### KRYPTONi-1xTH-HV


Inputs		
Input types	Thermocouple	
Number of channels	1	
Input connector	K-type Thermocouple LEMO REDEL 2P series	
ADC Type	24-bit delta-sigma	
Sampling Rate	Simultaneous 100 S/sec	
Isolation voltage	CAT III 600 V, CAT II 1000 V	
Input Impedance	100 ΜΩ	
Thermocouple		
TC type	Туре К	
Accuracy	±0.02 % of reading ±0.5 °C ±10 μV	
Resolution	< 0.001 °C	
Sampling rates	100, 80, 40, 20, 10 S/sec	
Typical Noise	0.007°C RMS @ Type K @ 10 S/sec	
Power		
Power consumption	1.3 W (typ.)	
Physical		
Dimensions	62 x 56 x 36 mm	
Weight	300 g	

### KRYPTON TH ACCURACY

Temperatur	Туре К	Type J	Type T	Type R	Type S	Type N	Type E	Type B	Type C
е									
-200 °C	1.19 °C	1.00 °C	1.18 °C			1.52 °C	0.95 °C		
-100 °C	0.84 °C	0.76 °C	0.87 °C			0.99 °C	0.74 °C		
0 °C	0.75 °C	0.70 °C	0.76 °C	2.35 °C	2.32 °C	0.88 °C	0.67 °C		1.22 °C
100 °C	0.76 °C	0.70 °C	0.73 °C	1.83 °C	1.87 °C	0.85 °C	0.67 °C	11.62 °C	1.14 °C
400 °C	0.81 °C	0.76 °C	0.73 °C	1.53 °C	1.61 °C	0.84 °C	0.70 °C	2.98 °C	1.09 °C
700 °C	0.88°C	0.79 °C		1.46 °C	1.56 °C	0.88 °C	0.76 °C	2.04 °C	1.14 °C
1000 °C	0.97 °C	0.86 °C		1.42 °C	1.53 °C	0.95 °C	0.84 °C	1.70 °C	1.25 °C
1300 °C	1.09 °C			1.42 °C	1.54 °C	1.03 °C		1.57 °C	1.39 °C
1700 °C				1.55 °C	1.69°C			1.57 °C	1.63 °C

#### 5.12.2. KRYPTONi-8xTH

KRYPTONi-8xTH module has 8 thermocouple-connectors for temperature measurement.

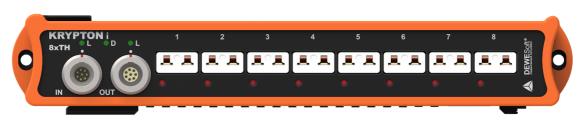


KRYPTONi-8xTH

KRYPTON® V20-1 82/142



#### 5.12.3. KRYPTONi-16xTH

KRYPTONi-16xTH module has 16 thermocouple-connectors for temperature measurement.

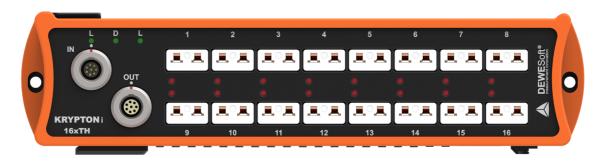

KRYPTONi-16xTH

#### 5.12.4. KRYPTONi-1xTH-HV

KRYPTONi-1xTH-HV is a single channel isolated module with LEMO REDEL H02 input connector for thermocouple temperature measurement. KRYPTONi-1xTH-HV is a perfect solution as thermocouple input for high voltage potential for battery measurements.



KRYPTONi-1xTH-HV

KRYPTON® V20-1 83/142



**Description** 

Input+

Input-

#### 5.12.5. TH: connectors



Thermocouple connector: pin-out (Mini TC)

Pin	Name	Description
1	ln+	Input+
2	ln-	Input-


**Name** 

In+

In-

Pin

2




Thermocouple connector: pin-out (2-pin LEMO REDEL H02

male)

# 5.12.6. TH: wiring diagrams

## 5.12.6.1. KRYPTONi-8xTH, KRYPTONi-16xTH: Voltage

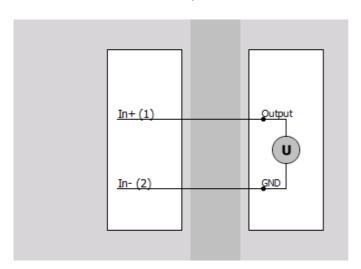

KRYPTON® V20-1 84/142




## 5.12.6.2. KRYPTONi-8xTH, KRYPTONi-16xTH: Temperature

T-type thermocouple


ANSI IEC In+ (1) Metal A

In- (2) Metal B


S-type, R-type thermocouple

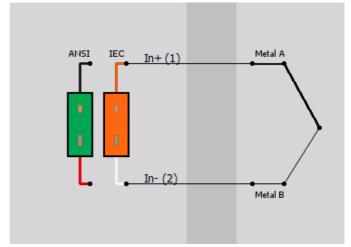

N-type thermocouple

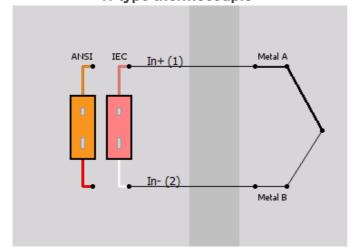


K-type thermocouple

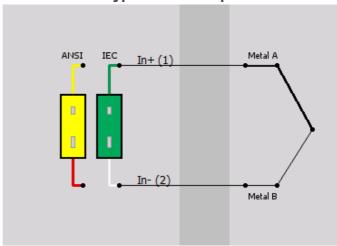


KRYPTON® V20-1 85/142




J-type thermocouple

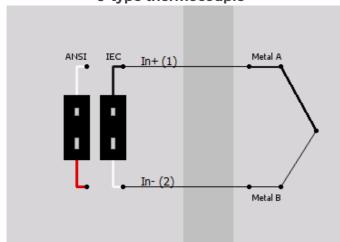


E-type thermocouple

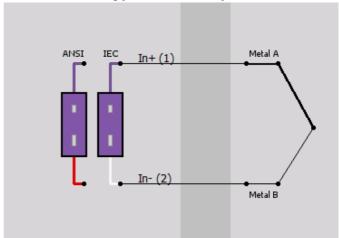

**B-type thermocouple** 

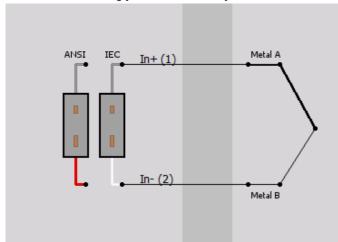

#### **C-type thermocouple**

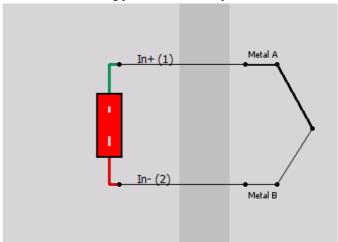


KRYPTON® V20-1 86/142



# 5.12.6.3. KRYPTONi-1xTH-HV: Temperature

## K-type thermocouple

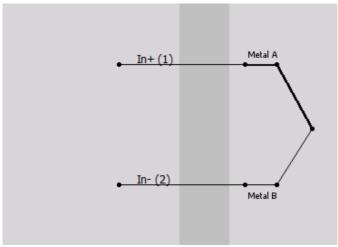

KRYPTON® V20-1 87/142



## 6. KRYPTON CPU

Small, highly portable and extremely rugged IP67 data logger for data recording in harsh environments.

Main features:

**IP67 DEGREE OF PROTECTION:** KRYPTON CPU is designed for testing in extremely harsh environments. The unit is fully waterproof, dustproof and can withstand shocks up to 100G.

**EXTREME OPERATING TEMPERATURE:** KRYPTON CPU is able to operate in extreme temperatures ranging from -40 °C to 70 °C.

**SMALLEST DATA LOGGER:** KRYPTON CPU is a very small data logger and is ready to be placed in tight places and for applications where space is limited.

**QUAD CORE CPU:** KRYPTON CPU is equipped with powerful Intel Atom quad-core CPU and fast 4GB memory.

**SSD STORAGE:** Internal SSD drive provides fast and reliable data storage for all your measurement channels.

**3 USB PORTS:** KRYPTON CPU has 3 USB 2.0 ports for connecting USB peripheral devices or any of our USB data acquisition systems like DEWE-43-A and/or SIRIUS.

**GLAN AND WiFi INTERFACES:** One Gigabit LAN port with RJ45 connector and WiFi adapter ensure a fast and reliable network connection.

**ETHERCAT INTERFACE:** Built-in EtherCAT interface port with power output and synchronization for directly connecting EtherCAT DAQ devices like SIRIUS waterproof and KRYPTON.



KRYPTON-CPU

KRYPTON® V20-1 88/142



# 6.1. KRYPTON CPU: specifications


Computer		
Processor	Intel® Atom™ Quad Core at 1.91 GHz	
Memory	4 GB	
Storage	Non-removable 240 GB mSATA SSD	
Interfaces and options		
USB	3x USB 2.0	
Ethernet	1x GLAN (Push-Pull), 1x WLAN (RP-SMA Female Jack)	
EtherCAT®	1x EtherCAT® 100 Mbps Full Duplex, LEMO 8pin female	
Video	DVI-D	
Power		
Power supply	9 - 48 V DC	
Power consumption	Min. 7.7 W Max. 19.9 W	
Environmental		
Operating Temperature -40 °C to 70 °C		
Storage Temperature	-40 °C to 85 °C	
Humidity	5 to 100 % RH	
IP rating	IP65 / IP67	
Shock	Shock: SIST EN 60068-2-27:2009 100 g, 6 ms, half-sine 100x pos./neg in each axis 600x total	
Vibration	Random: MIL-STD-202G Method 214A, test condition II-D Profile break points: 50 Hz - 0.025 g²/Hz 100 Hz - 0.1 g²/Hz 2000 Hz - 0.1 g²/Hz Profile RMS / Peak = 13.9 g / 41.7 g 8 hrs in each axis, 24 hrs total	
Physical		
Dimension	231 x 77 x 57 mm	
Weight	1.0 kg	


KRYPTON® V20-1 89/142





## 6.2. KRYPTON CPU: dimensions

## KRYPTON CPU

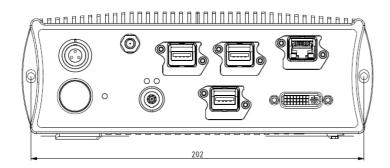



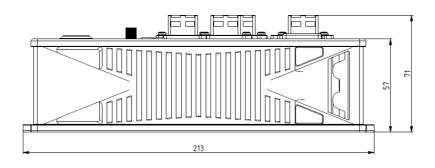



All dimensions are in mm.

Dimensions-KRYPTON CPU


KRYPTON® V20-1 90/142



#### 6.3. Connectors

Name	Description
Power In	3-pin LEMO male connector
USB	3x USB 2.0 connector
Ethernet	RJ-45 connector
EtherCAT	8-pin LEMO connector
DVI	DVI connector
WiFi	RP-SMA Female WLAN antenna

#### 6.3.1. Pinout: Power In Connector



Pin	Name	Description
1	V +	Supply
2	GND	Ground
3	Remote - On	Remote - On pin

Power in connector: pin-out (3-pin LEMO male)

PWR IN connector (on the device): EXJ.1B.302.HLD Mating connector (for the cable): FGG.1B.302.CLAD52Z

#### HINT



To power the system on, press the Power switch OR apply a voltage between 3 and 30V to the Remote-on pin. To power off the system press Power switch or reduce the voltage on Remote-on below 0.5V for more than one second. If you hold the Power switch for more than 5seconds the Krypton CPU will be forced to shut down.

### **IMPORTANT**



When you lower the Voltage on the Remote - On, the Krypton CPU will start the shut-down procedure. If the Krypton CPU does not turn off in 60 seconds, it is suspected that something went wrong and the power is taken from the system (Forced shut-down).

KRYPTON® V20-1 91/142



# 7. KRYPTON Accessories

# 7.1. KRYPTON Power Supply

The Krypton Power Supply is available as an option.. You can connect the LEMO 8-pin connector of the Krypton Power Supply directly to the OUT connector of the Krypton module.

Article number	PS-120-L1T8m	PS-200-Llt8m
Output Voltage	24 VDC	24 VDC
Current	5 A	8.3 A
Power	120 W	200 W
Connector	8-pin LEMO male (L1T8m)	8-pin LEMO male (L1T8m)

# 7.2. KRYPTON-CPU Power Supply

AC/DC power supply adapter with waterproof connector

Article number	PS-200-L2T3f
Output Voltage	24 VDC
Current	8.3 A
Power	200 W
Connector	3-pin LEMO female (L2T3f)

KRYPTON® V20-1 92/142



## 7.3. ECAT Power Junction

The ECAT Power Junction box (article number: ECAT-POWER-JUNCTION) can be used to inject power into the Ethernet connection between your PC and the KRYPTON modules: so that you only have one cable for power and data to your KRYPTON modules.

Connector Label	Connector type	Info
POWER IN	2-pin LEMO male	9 - 48 VDC: e.g. for connection from the Power-Out connector of a Sirius slice
Ethernet	RJ-45	Ethernet data connection to your PC The Ethernet cable should always be shielded! You can use an EIA568-B straight or crossover cable.
EtherCAT	8-pin LEMO female	Power and Data connection to your KRYPTON module/s use any of the ECAT to ECAT expansion cables (e.g. L1T8m-L1T8f-10M)




ECAT Power junction

KRYPTON® V20-1 93/142



#### 7.3.1. Pinout: Power in connector




Pin	Name	Description
1	IN+	Input +
2	IN-	Input -

Power junction connector: pin-out (2-pin LEMO male)

POWER IN connector (on the device): EXJ.1B.302.HLD Mating connector (for the cable): FGG.1B.302.CLAD52Z

Power will be connected from 2pin PS LEMO V+ to VCC of the 8pin LEMO. V- is GND on the 8pin LEMO.

#### 7.3.2. Pinout: RJ45 connector




Ethernet connector: pin-out (RJ-45 female)

Pin	Name	Description
1	TX_P	Transmission +
2	TX_N	Transmission -
3	RX_P	Reception +
4	-	-
5	-	-
6	RX_N	Reception -
7	-	-
8	-	-

KRYPTON® V20-1 94/142



## 7.3.3. Pinout: EtherCAT connector



ECAT connector: pin-out (8-pin LEMO female)

Pin	Name	Description
1	TX_P	Transmission +
2	TX_N	Transmission -
3	RX_P	Reception +
4	RX_N	Reception -
5	VCC	PWR IN
6	VCC	PWR IN
7	GND	Ground
8	GND	Ground

IN connector (on the device): EEJ.1B.308.CLD

Mating connector (for the cable): FGJ.1T.308.CLL.1433

KRYPTON® V20-1 95/142



# 7.4. ECAT Power Injector

The ECAT Power Injector box (article number: ECAT Power Injector) can be used to inject power into the Ethernet connection between KRYPTON modules, when you can have a very long measurement chain.

Connector Label	Connector type	Info
PWR	8-pin LEMO female	Max. 48 VDC
↓ EtherCAT In ↑ EtherCAT Out	8-pin LEMO	Power and Data connection to your KRYPTON module/s use any of the ECAT to ECAT expansion cables (e.g. L1T8m-L1T8f-10M)
GND	Banana	Ground connection




ECAT Power injector

KRYPTON® V20-1 96/142



## 7.4.1. Pinout: PWR connector




PWR connector: pin-out (8-pin LEMO female)

Pin	Name	Description
1	-	-
2	-	-
3	-	-
4	-	-
5	VCC	PWR OUT
6	VCC	PWR OUT
7	GND	Ground
8	GND	Ground

IN connector (on the device): EEJ.1B.308.CLD Mating connector (for the cable): FGJ.1T.308.CLL.1433

#### 7.4.2. Pinout: EtherCAT out connector



ECAT connector: pin-out (8-pin LEMO female)

Pin	Name	Description
1	TX_P	Transmission +
2	TX_N	Transmission -
3	RX_P	Reception +
4	RX_N	Reception -
5	VCC	PWR IN
6	VCC	PWR IN
7	GND	Ground
8	GND	Ground
	·-	<u> </u>


IN connector (on the device): EEJ.1B.308.CLD
Mating connector (for the cable): FGJ.1T.308.CLL.1433

KRYPTON® V20-1 97/142



## 7.4.3. Pinout: EtherCAT IN connector

The connector for EtherCAT is a LEMO 1B 8-pin male connector.



IN connector: pin-out (8-pin LEMO male)

Pin	Name	Description
1	TX_P	Transmission +
2	TX_N	Transmission -
3	RX_P	Reception +
4	RX_N	Reception -
5	-	-
6	-	-
7	-	-
8	-	-

IN connector (on the device): EEJ.1B.308.CLD Mating connector (for the cable): FGJ.1T.308.CLL.1433

KRYPTON® V20-1 98/142



# 7.5. ECAT Sync Junction

The ECAT Sync Junction box can be used to inject the sync signal into the EtherCAT line. The source of the sync signal must be IRIG B DC: thus, the sync signal of Sirius USB slices can be directly connected to the ECAT Sync Junction box.

Connector Label	Connector type	Info
IN	8-pin LEMO	EtherCAT input connector: e.g. connection to the PC via L1T8f-RJ45-1M cable
OUT	8-pin LEMO	EtherCAT output connector to your Krypton slice/s use any of the ECAT to ECAT expansion cables (e.g. L1T8m-L1T8f-10M).
SYNC	4-pin LEMO	Input connector for the IRIG-B-DC signal (TTL level), e.g. external, or directly from Sirius USB Note: the two SYNC connectors are directly connected, so you can use the other connector as output (to daisy-chain the same sync signal to other devices: e.g. DEWE-43-A, DS-CAM, etc.)




ECAT sync junction

KRYPTON® V20-1 99/142



#### 7.5.1. Pinout: EtherCAT out connector




OUT connector: pin-out (8-pin LEMO female)

Pin	Name	Description
1	TX_P	Transmission +
2	TX_N	Transmission -
3	RX_P	Reception +
4	RX_N	Reception -
5	VCC	PWR IN
6	VCC	PWR IN
7	GND	Ground
8	GND	Ground

IN connector (on the device): EEJ.1B.308.CLD
Mating connector (for the cable): FGJ.1T.308.CLL.1433

#### 7.5.2. Pinout: EtherCAT in connector

The connector for EtherCAT is a LEMO 1B 8-pin male connector.



IN connector: pin-out (8-pin LEMO male)


Pin	Name	Description
1	TX_P	Transmission +
2	TX_N	Transmission -
3	RX_P	Reception +
4	RX_N	Reception -
5	VCC	PWR IN
6	VCC	PWR IN
7	GND	Ground
8	GND	Ground

IN connector (on the device): EEJ.1B.308.CLD Mating connector (for the cable): FGJ.1T.308.CLL.1433

KRYPTON® V20-1 100/142



# 7.5.3. Pinout: Sync connector



Sync connector: pin-out (4-pin LEMO female)

Interface connector: EEG.00.304.CLL Mating connector: FGG.00.304.CLAD27Z

Pin	Name	Description
1	CLK	Clock
2	Trigg	Trigger
3	GPS-PPS	GPS - PPS
4	DGND	Digital Ground

KRYPTON® V20-1 101/142



# 7.5.4. ECAT Sync Junction: Specifications

Interface		
Data interface	EtherCAT®	
Data Rate	100 Mbps Full Duplex bus speed	
Max. Throughput per Chain	From 6 MB/s to 10 MB/s	
Sync Accuracy	below 1 sample to Sirius®	
EtherCAT®	Max. Cable Length 100 m	
Max. Number of Units	64 or more (power injectors may be required)	
Data Interface Connection	LEMO 1T EtherCAT® hybrid cable Single cable for data, power and sync, daisy chainable	
Power specification		
Power Supply	9-48 V DC	
Current	8 A DC max	
Environmental specification		
Operating Temperature	-40 to 70°C	
Storage Temperature	-40 to 85°C	
Shock & Vibration	Shock: SIST EN 60068-2-27:2009 (100 g, 6 ms) Random vibration	

KRYPTON® V20-1 102/142



#### 7.6. ECAT GPS Junction

ECAT GPS Junction is used for synchronization between SIRIUS-EtherCAT or KRYPTON series to SIRIUS, IRIG-B-DC or GPS. ECAT GPS junction has a built-in 10 Hz GPS receiver and connector for connecting GPS or IRIG-B-DC time code signal. The devices are synchronized using this time code. The built-in GPS receiver can also be used for recording positioning, just like with any other navigational device.

Connector Label	Connector type	Info
IN	8-pin LEMO male	EtherCAT input connector: e.g. connection to the PC via L1T8f-RJ45-1M cable
OUT	8-pin LEMO female	EtherCAT output connector to your Krypton slice/s use any of the ECAT to ECAT expansion cables (e.g. L1T8m-L1T8f-10M).
SYNC	4-pin LEMO male	Input connector for the IRIG-B-DC signal (TTL level), e.g. external, or directly from the two SYNC connectors are directly connected, so you can use the other connector as output (to daisy-chain the same sync signal to other devices: e.g. DEWE-43-A, DS-CAM, etc.)
GPS	GPS ANT SMA Female Jack connector	Synchronization between SIRIUS-EtherCAT or KRYPTON series to GPS.




ECAT GPS junction

KRYPTON® V20-1 103/142



### 7.6.1. Pinout: EtherCAT out connector




OUT connector: pin-out (8-pin LEMO female)

Pin	Name	Description
1	TX_P	Transmission +
2	TX_N	Transmission -
3	RX_P	Reception +
4	RX_N	Reception -
5	VCC	PWR IN
6	VCC	PWR IN
7	GND	Ground
8	GND	Ground

IN connector (on the device): EEJ.1B.308.CLD Mating connector (for the cable): FGJ.1T.308.CLL.1433

#### 7.6.2. Pinout: EtherCAT in connector

The connector for EtherCAT is a LEMO 1B 8-pin male connector.



IN connector: pin-out (8-pin LEMO male)


Pin	Name	Description
1	TX_P	Transmission +
2	TX_N	Transmission -
3	RX_P	Reception +
4	RX_N	Reception -
5	VCC	PWR IN
6	VCC	PWR IN
7	GND	Ground
8	GND	Ground

IN connector (on the device): EEJ.1B.308.CLD

Mating connector (for the cable): FGJ.1T.308.CLL.1433

KRYPTON® V20-1 104/142

# 7.6.3. Pinout: Sync connector



Sync connector: pin-out (4-pin LEMO female)

Interface connector: EEG.00.304.CLL Mating connector: FGG.00.304.CLAD27Z

Pin	Name	Description
1	CLK	Clock
2	Trigg	Trigger
3	GPS-PPS	GPS - PPS
4	DGND	Digital Ground

KRYPTON® V20-1 105/142



# 8. Hardware overview


## 8.1. EtherCAT connector

## 8.1.1. Cable

Device Connector	Cable Image Type Art. Number-Example	Device Connector	Description
DS-EtherCAT device IN (8-pin LEMO)	ECAT to ECAT L1T8m - L1T8f	DS-EtherCAT device OUT (8-pin LEMO)	Data, Sync and Power connection between the Krypton™ slices, the Sirus EtherCAT slice and the Krypton CPU.

#### 8.1.2. Pinout: IN connector

The connector for EtherCAT is a LEMO 1B 8-pin male connector.



IN connector: pin-out (8-pin LEMO male)

Pin	Name	Description
1	TX_P	Transmission +
2	TX_N	Transmission -
3	RX_P	Reception +
4	RX_N	Reception -
5	VCC	PWR IN
6	VCC	PWR IN
7	GND	Ground
8	GND	Ground


IN connector (on the device): EEJ.1B.308.CLD Mating connector (for the cable): FGJ.1T.308.CLL.1433

KRYPTON® V20-1 106/142



## 8.1.3. Pinout: OUT connector

OUT connector for EtherCAT is a LEMO 1B 8-pin female connector.



OUT connector: pin-out (8-pin LEMO female)

Pin	Name	Description
1	TX_P	Transmission +
2	TX_N	Transmission -
3	RX_P	Reception +
4	RX_N	Reception -
5	VCC	PWR OUT
6	VCC	PWR OUT
7	GND	Ground
8	GND	Ground

OUT connector (on the device): EEG.1B.308.CLN Mating connector (for the cable): FGG.1T.308.CLA.1433

KRYPTON® V20-1 107/142



## 8.2. LEDs blinking codes

Each Krypton slice has 3 green LEDs: **L - D - L**. The LED blinking codes adhere to the EtherCAT specification.

- L means Link: i.e. the In- (left L-LED) or Out-connector (right L-LED) is linked to another Krypton slice or to the measurement PC,
- **D is for Data**: it is active only when the Data transfer is active this requires that power is connected AND the slice is linked to another slice or a PC Note: older versions may have the label P (for Protocol) instead of D.

#### 8.2.1. INIT state

When you power the Krypton slice and there is no EtherCAT master connected (i.e. DewesoftX® is not running or the slice is not connected to the PC), then the slice will be in the INIT state. In this state, the D LED will be OFF. The L LED will be ON when you connect another Krypton slice.




KRYPTON® V20-1 108/142



When the connection to the PC is lost while the configuration was in the operation state the LED state will change:


The L LED will be ON and the D LED will be slowly blinking.

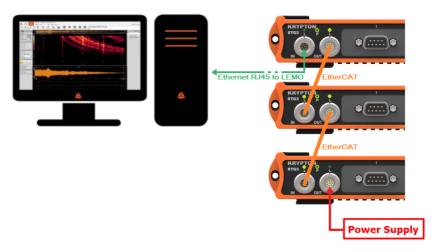

Lost PC connection

#### 8.2.2. PRE-OP state

In this state the EtherCAT master is detecting the slaves and reads their basic information: the **D** LED is blinking fast. DewesoftX® will set the Krypton slice in the PRE-OP state when you enter the Device settings or when you are loading the setup.

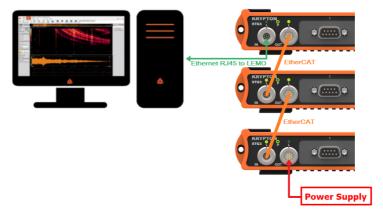

PRE-OP state

KRYPTON® V20-1 109/142



#### 8.2.3. SAFE-OP state

In this state the EtherCAT master is already reading the data from the slice/s at a slow sampling rate: the D LED is slowly blinking. DewesoftX® will set the Krypton slice/s in the SAFE-OP state when you are in Channel Setup.



SAFE-OP state

### 8.2.4. OP state

In this state the EtherCAT master is reading the data from the slice/s at the desired sampling rate: the D LED is turned ON. DewesoftX® will set the Krypton slice/s in the OP state when you are in Measure Mode.



OP state

KRYPTON® V20-1 110/142



# 8.3. Mechanical locking of modules

KRYPTON modules can easily be stacked together. The mechanical lock mechanism is on the top and bottom of each KRYPTON module. Here is a view of the bottom lock mechanism:





Bottom lock mechanism

To lock 2 KRYPTON modules, first fit the nose of the bottom part 1 into the matching part of the other KRYPTON module. Now apply a little force to move the module to the right 2, until the 2nd part of the mechanism can move down.



Bottom lock mechanism

Now release the force and the spring in the mechanism will move back to the left and both modules are now locked 3.

To release the lock, just reverse the locking-procedure. Move the top slice to the right, until you can lift it up a little. Then the KRYPTON modules are separated again.

KRYPTON® V20-1 111/142



### 8.4. Mounting plates

#### 8.4.1. DS-MOUNT-K2

Aluminium mounting plate with click mechanism for mounting on the bottom side of KRYPTON module. For detailed technical drawings please contact the Dewesoft team.

Fits to: KRYPTON single, KRYPTON dual, KRYPTON CPU



#### Hint

The mechanism is not meant to sustain large vibrations and a huge stack of devices.



Bottom aluminum mounting plate

#### 8.4.2. DS-MOUNT-K3

Rugged aluminum mounting plate with click mechanism for mounting on the upper side of the KRYPTON module. For detailed technical drawings please contact the Dewesoft team. Fits to: KRYPTON single, KRYPTON dual



#### Hint

The plate is meant to sustain large vibrations for a single device.



Upper aluminum plate - rugged version

KRYPTON® V20-1 112/142



### 8.4.3. DS-MOUNT2-K

Aluminium mounting plate with click mechanism for mounting two KRYPTONs (bottom side to the mounting plate) or KRYPTON CPU. The assembly can be afterward fitted to the top of the SIRIUS module. For detailed technical drawings please contact the Dewesoft team. Fits to: KRYPTON single, KRYPTON dual, KRYPTON CPU



Mounting adapter for attaching KRYPTONs to the SIRIUS module

KRYPTON® V20-1 113/142



# 9. Connection overview

This chapter shows some connection examples to give an idea of what combinations are possible and what are the important limitations you need to consider before mounting the Dewesoft system.

When you set up your system you have to be careful about the system limitations, such as **bandwidth** (maximum rate of data transfer), **cable length** between devices (power supply cable and ECAT cables) and **power consumption** of devices.

We recommend that you calculate the Bandwidth of the system with our Dewesoft calculator, which you find on our web-page. The recommendable upper limitation for Krypton ECAT devices is around 6Mb/s, if you exceed the maximum bandwidth you will need additional data (ECAT or USB) lines.

If the system needs very long cables between devices, the voltage drop is bigger consequently the output voltage is smaller, which means fewer devices can be supplied in the further chain. If the system requires a long power supply cable, you should consider using a thicker cable (e.g M10).

In the specification tables you can find a power consumption of each Krypton device and calculate approximate consumption. You can also calculate the collective consumption with our <a href="EtherCAT">EtherCAT</a> calculator (implemented in the configurator), where also a voltage drop on cables is taken into account. If there isn't enough PS for all devices, a **power injector** must be added in the middle of the chain.

KRYPTON® V20-1 114/142



# All cables

The following table shows the signal line coding that will be used in the following system connection examples.


Device / Connector	Cable	Device / Connector	Description
LAN	Ethernet RJ45 to LEMO 1T 8pin female	IN	EtherCAT connection from PC to the KRYPTON EtherCAT device.
SYNC	Sync LEMO 00B 4pin male to male	SYNC	Input / Output of the synchronization signal.
	EtherCAT LEMO IT 8pin male to female	OUT TUO	Data, Sync and Power connection between the KRYPTON device.
OUT OUT	DC-power supply LEMO 1T 8pin male		Power supply connection to the KRYPTON device.
	DC-power supply LEMO 1B 2pin female		Power supply connection to the SIRIUS device and IOLITEs.
	USB type A to USB type B mini		USB data connection from PC to the SIRIUS USB device.
GPS	HF-GPS cable with low noise		GPS antenna

KRYPTON® V20-1 115/142



# 9.1. Only EtherCAT devices

When you only use Dewesoft EtherCAT devices (Krypton or Sirius EtherCAT), the connection is straightforward via ECAT to ECAT cable.

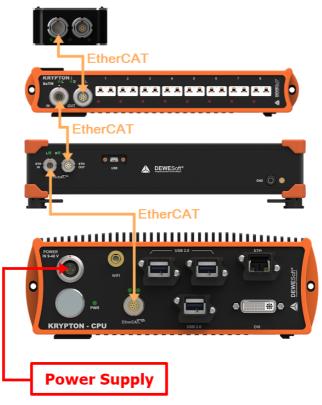

A system with only ECAT devices (Krypton ONE, KRYPTON-8xTH, SIRIUSe, and KRYPTON-CPU)

List of required cables:

Function	Dewesoft order code
Power supply	PS-200-L2T3f
EtherCAT	EtherCAT to EtherCAT: L1T8m-L1T8f



#### Hint

When you use EtherCAT Sirius devices, you can transfer the data through USB cable (Higher speed - 200 kS/s), but the configuration and control still run through ECAT cable - Speed boost mode. With speed boost mode the ECAT data line is less loaded.


KRYPTON® V20-1 116/142



# 9.2. Power Injector

The Power Injector box can be used to inject power to long EtherCAT measurement chains.


The Power Injector box needs an external power supply and must be connected directly between the EtherCAT devices.

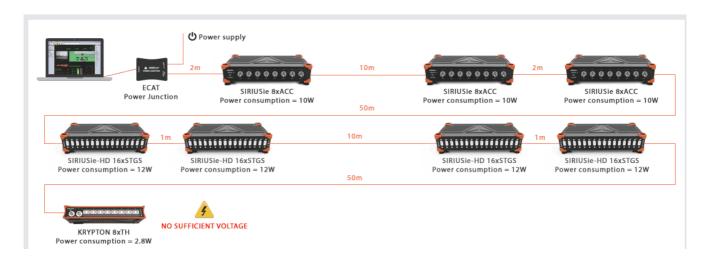



KRYPTON® V20-1 117/142



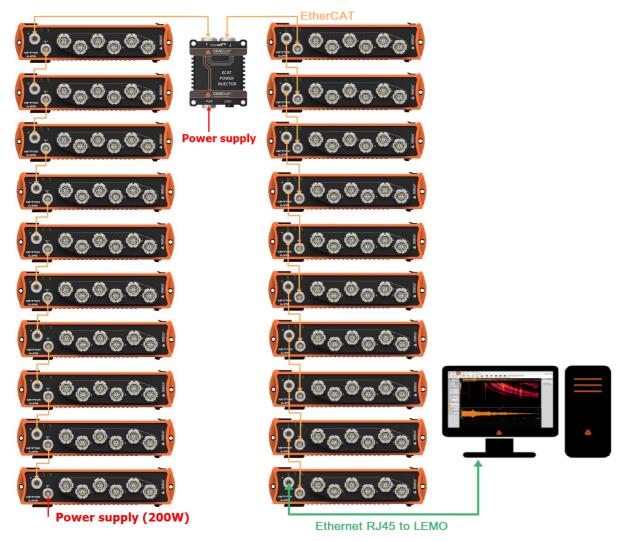

A system with Power Injector

### List of required cables:

Function	Dewesoft order code
Power supply	PS-200-L1T8m
EtherCAT	EtherCAT to EtherCAT: L1T8m-L1T8f, ECAT - PC connection: L1T8f-RJ45


KRYPTON® V20-1 118/142





#### Hint

To transfer the most power, you should connect a longer ECAT cable (e.g. 50 m) before the power Injector and shorter ECAT cable (e.g. 1 m) to the next device, so the voltage drop will be on the shorter cable.



Power injector



#### Hint

When preparing a system please use our <u>ECAT calculator</u>, which you can find in the configurator, to calculate the power consumption of the system, and make sure if any additional ECAT power injector is needed in the Krypton chain.

### 9.3. Power Junction

The Power Junction box can be used to join the Ethernet and the Power lines in a single 8-pin ECAT cable. In the example we connect a PC to the Krypton chain. Effective use of the Power Junction is when the Krypton devices are far away from the PC or a system and there is no power supply available (i.e. in a temperature measurement chamber).



System with Power Junction

KRYPTON® V20-1 119/142




List of required cables:

Function	Dewesoft order code
Power supply	PS-120-L1B2f
EtherCAT	EtherCAT to EtherCAT: L1T8m-L1T8f
Ethernet	RJ45-RJ45

## 9.4. Distributed system with Krypton ONE

Krypton One devices can be used in a remote area from other used devices connected with a ECAT-ECAT cable up to **100 m** length. The pocket-size allows the modules to be mounted in tight places, right next to the sensors. Therefore the signal is amplified closer to the place of measurement, and this helps to amplify only a small amount of signal noise, then the already digitized signal goes through the long shielded cable, so there is less data loss.

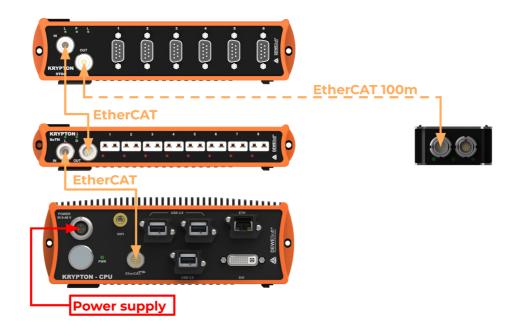

System with Krypton ONE

List of required cables:

Function	Dewesoft order code
Power supply	PS-200-L2T3F
EtherCAT	EtherCAT to EtherCAT: L1T8m-L1T8f

KRYPTON® V20-1 120/142



# 9.5. Ecat Sync Junction/Ecat GPS Junction

The Ecat Sync Junction and Ecat GPS Junction are very similar accessories for the EtherCAT line. The main differences are:

- the GPS Junction has an additional GPS connector
- the GPS Junction enables additional GPS channels



### **Important**

To use the Junction device properly we need to connect it as the first device in the EtherCAT chain.

The junctions can be used for different purposes. One of them is to inject the external sync signal into the EtherCAT line such as IRIG-B-DC (both) or GPS PPS signal (GPS junction).



Left system with Sync Junction - Right system with GPS EtherCAT junction


List of required cables:

Function	Dewesoft order code
Power supply	PS-120-L1T8m
EtherCAT	EtherCAT to EtherCAT: L1T8m-L1T8f, ECAT - PC connection: L1T8f-RJ45
Synchronization	L00B4m-L00B4m
HF-GPS cable	SMA-TNC

KRYPTON® V20-1 121/142



The second purpose is to synchronize data between **EtherCAT data lines** (e.g. Krypton line) with **USB data line** (e.g. Sirius USB or DEWE-43-A).

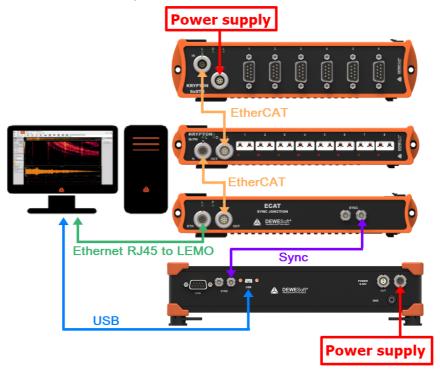

Synchronizing data from USB and ECAT data lines with Sync junction

### List of required cables:


Function	Dewesoft order code
Power supply	Krypton: PS-120-L1T8m Sirius: PS-120-L1B2f
EtherCAT	EtherCAT to EtherCAT: L1T8m-L1T8f, ECAT - PC connection: L1T8f-RJ45
Synchronization	L00B4m-L00B4m
USB	USB1-USB2s or USB1s-USB2s

KRYPTON® V20-1 122/142



# 9.6. Connecting SIRIUS-R4 and Krypton STG

The ECAT sync junction is not required with IOLITE, SIRIUSe, R1, R2, R4, R8 or MINITAURS DAQ systems when extended with EtherCAT devices, because the sync junction is already built into the systems.

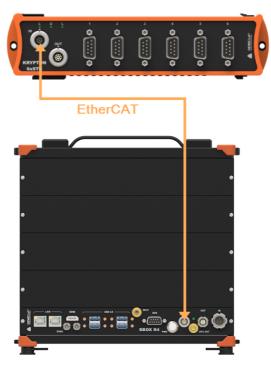

Connection between SIRIUS-R4 and KRYPTON-6xSTG

List of required cables:

Function	Dewesoft order code
EtherCAT	EtherCAT to EtherCAT: L1T8m-L1T8f

KRYPTON® V20-1 123/142



# 9.7. Soft-Sync connection

When you expand your USB based measurement system with a single Krypton slice for temperature measurement (Krypton-TH or RTD device), you don't need any junction devices at all (i.e. for the slow temperature measurement synchronisation is automatically done by software).



Connecting Krypton TH and Sirius USB to PC

#### List of required cables:

Function	Dewesoft order code
Power supply	Krypton: PS-120-L1T8m Sirius: PS-120-L1B2f
EtherCAT	ECAT - PC connection: L1T8f-RJ45
USB	USB1-USB2s or USB1s-USB2s


Of course, other Krypton devices can be used, but you need to take into account that modules can only run up to 100 Hz in the Soft-Sync mode. When a higher sample rate is chosen the synchronization won't be perfect.

KRYPTON® V20-1 124/142



# 9.8. Mixed system

When we calculate the bandwidth of a system we need to acknowledge that we have two data lines in our system - USB and EtherCAT. Take into consideration that IOLITEs has an internal sync junction for synchronization.

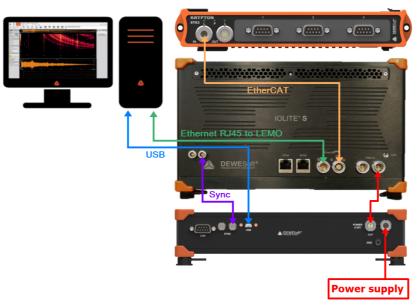

A mixed system with a built-in sync junction

### List of required cables:

Function	Dewesoft order code
Power supply	PS-120-L1B2f
Supply Daisy chain	L1B2m-L1B2f
Ethercat	EtherCAT to EtherCAT: L1T8m-L1T8f, ECAT - PC connection: L1T8f-RJ45
Synchronization	L00B4m-L00B4m
USB	USB1-USB2s or USB1s-USB2s

KRYPTON® V20-1 125/142




### 9.9. Two EtherCAT lines

When we need more than one EtherCAT chain, switches can not be used. We recommend using one of the following two solutions.

### 9.9.1. Use computer which has more than one Ethernet port

Every chain will work as an individual which allows you to use full 100 Mbps on each. In this configuration, the EtherCAT chains need to be synchronized to each other, so every chain also needs a Sync junction.

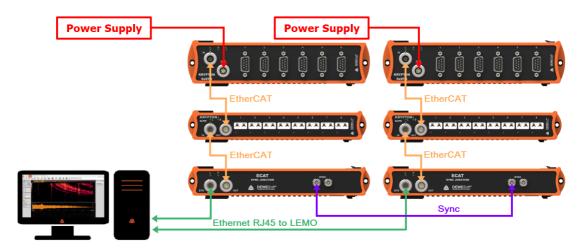

Connection done with two Ethernet ports

List of required cables:


Function	Dewesoft order code
Power supply	PS-120-L1T8m
Ethercat	EtherCAT to EtherCAT: L1T8m-L1T8f, ECAT - PC connection: L1T8f-RJ45
Synchronization	L00B4m-L00B4m

KRYPTON® V20-1 126/142



## 9.9.2. Use the DS-HUBe7 junction

In this case, it is possible to use multiple chains, but the speed will be limited to the speed of a single chain. The chains will behave as one, so no additional synchronization is needed.

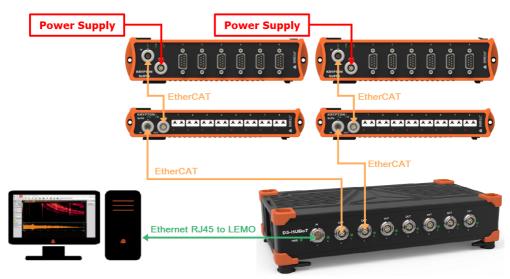

Connection done with DS-HUBe7

List of required cables:

Function	Dewesoft order code
Power supply	PS-120-L1T8m
Ethercat	EtherCAT to EtherCAT: L1T8m-L1T8f, ECAT - PC connection: L1T8f-RJ45

KRYPTON® V20-1 127/142



# 10. Advanced

### 10.1. PWM output on Krypton 4xDO


The Krypton 4xDO module has integrated an additional option for the PWM signal output. The option is supported with the Dewesoft X3 SP5 release or newer.

The PWM can be enabled in the A/D out module. Go to Settings of the digital out channel and choose the "On" option from the PWM drop down menu. Additional fields will appear where you can type the **period**. The maximum output Frequency is *100kHz*, which is *0.01ms* and the lowest output Frequency is *7Hz* which is approximately *140ms*.

Wire type can be "Use as switch" either "Use as digital output".

There are two different Value types:

- *Manual* Additional User control channel will be created, with which you can regulate the duty cycle in measure mode
- From Channel The Duty cycle is defined by the selected channel

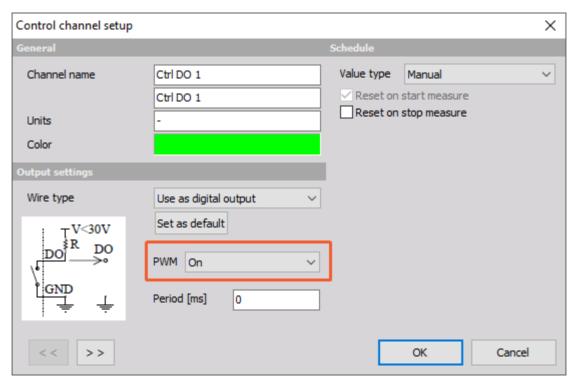


PWM output settings

When Value type is selected use Input control widgets for controlling the duty cycle. It is 0 by default, but it can be adjusted with the input control display (0-100%):

KRYPTON® V20-1 128/142



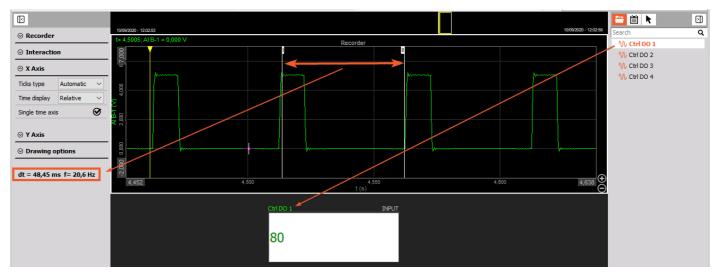

Adjusting Duty Cycle in Measure mode

KRYPTON® V20-1 129/142



# 11. Appendix

# 11.1. Glossary and abbreviations

This glossary includes explanations of some of the most important terms and abbreviations that are used in documentation.

#### **AAF**

AAF or Anti Aliasing Filter in short.

#### **Bit**

Bit, the basic unit of information storage, a single binary digit that is either 0 or 1.

### Baud (Bd)

Baud is synonymous to symbols per second. It is the unit of symbol rate, also known as baud rate or modulation rate; the number of distinct symbol changes.

A baud rate, by definition, means the number of times a signal in a communications channel changes state or varies.



#### Example

A 2400 baud rate means that the channel can change states up to 2400 times per second. This is often confused with the bit rate (expressed in bit/s), which is related, but may be different. The number of bits per baud is determined by the modulation technique.



### **Example**

If we use a baud rate of 2400 and a phase modulation (which can transmit four bits per baud), this means that we can transfer 9600 bit/s. 2400 baud x 4 bits per baud = 9600 bps.

The baud rate (communication speed) between the DS GATE and the measurement modules can be configured via software.

KRYPTON® V20-1 130/142



#### CJC

Cold junction compensation.

Thermocouples measure the temperature difference between two points, not absolute temperature. To measure a single temperature one of the junctions - normally the cold junction - is maintained at a known reference temperature, and the other junction is at the temperature to be sensed.

Having a junction of known temperature, while useful for laboratory calibration, is not convenient for most measurement and control applications. Instead, they incorporate an artificial cold junction using a thermally sensitive device such as a thermistor or diode to measure the temperature of the input connections at the instrument, with special care being taken to minimize any temperature gradient between terminals. Hence, the voltage from a known cold junction can be simulated, and the appropriate correction applied. This is known as cold junction compensation.

#### dB

The decibel (dB) is a logarithmic unit that indicates the ratio of a physical quantity (usually power or intensity) relative to a specified or implied reference level. A ratio in decibels is ten times the logarithm to base 10 of the ratio of two power quantities.

#### **Dewesoft**

Dewesoft refers to the company.

DewesoftX® refers to the software suite for data acquisition, data processing, data analysis and much more.

### **Dynamic Range**

Dynamic Range is the ratio of a specified full scale input range to the minimum detectable value (peak spurious signal). The value for dynamic range is expressed in decibels (dB).

#### **DSP**

A digital signal processor (DSP) is a specialized microprocessor with an optimized architecture for the fast operational needs of digital signal processing.

The measurement modules use DSPs to process the measured data.

#### **FFT**

Fast Fourier transformation (FFT) can be used to show the frequency components of the acquired signals in amplitude and frequency. DewesoftX $^{\circ}$  has a built-in visual control that makes FFT easy to use.

KRYPTON® V20-1 131/142



#### **FPGA**

A field-programmable gate array (FPGA) is an integrated circuit designed to be configured by the customer or designer.

After manufacturing: hence field-programmable.

#### **GND**

The electrical ground (aka. earth).

#### **GPS**

The Global Positioning System (GPS) is a space-based global navigation satellite system that provides reliable location and time information in all weather and at all times and anywhere on or near the Earth when and where there is an unobstructed line of sight to four or more GPS satellites.

#### Hz

The hertz (symbol: Hz) is the SI unit of frequency defined as the number of cycles per second of a periodic signal.

#### **IRIG-B**

The Inter Range Instrumentation Group (IRIG) is the standards body of the Range Commanders Council (RCC). They publish a number of standards: e.g. IRIG time-codes The different time-codes defined in the Standard have alphabetic designations. A, B, D, E, G, and H. IRIG-B has a Bit rate of 100 Hz.

#### **LED**

A light-emitting diode is a semiconductor light source. It is used in all modules of the SIRIUS® system to indicate the status of the modules.

#### **LEMO**

LEMO is the name of the high quality push-pull connectors that are used for cable connections: e.g. the power-supply cable and the sync cables of the SIRIUS® system. The company that produces these connectors is also called LEMO (www.lemo.com)

KRYPTON® V20-1 132/142



#### Microsoft®

Corporation is a public multinational corporation head-quartered in Redmond, Washington, USA that develops, manufactures, licenses, and supports a wide range of products and services predominantly related to computing through its various product divisions.

DewesoftX® is a Windows® based application and thus a Windows® operating system must be installed on the measurement PC where DewesoftX® is installed.

### **NET Option**

aka. DewesoftX NET, DEWE NET

With DEWE-NET your measurement system can be controlled remotely with ease of use you couldn't imagine before. DEWE-NET also serves as the centre of Distributed Data Acquisition systems where you have multiple systems located either together or scattered across an entire continent. IRIG and GPS time will take care that data will stay synchronised, no matter how long the acquisition runs.

#### OS

An operating system (OS) is a set of system software running on a device that manages the system hardware.

This may refer to the operating system of a PC (Windows is required for DewesoftX®) or to the operating system of the SIRIUS® system.

#### PC

SIRIUS® systems are typically connected to a Personal Computer which runs DewesoftX® to fetch the measurement data.

#### **RMS**

Root Mean Square (RMS), also known as the quadratic mean, is a statistical measure of the magnitude of a varying quantity. It is especially useful when variables are positive and negative, e.g., sinusoids. RMS is used in various fields, including electrical engineering.

#### **RTD**

Resistance thermometers, also called resistance temperature detectors or resistive thermal devices (RTDs), are temperature sensors that exploit the predictable change in electrical resistance of some materials with changing temperature; e.g. Pt100 and Pt1000.

KRYPTON® V20-1 133/142



#### **SNR**

Signal to Noise Ratio (SNR) is the ratio of the RMS value of the full scale input range to the total RMS noise measured with the inputs shorted together. The value for SNR is expressed in decibels (dB).

#### **SNTP**

Simple Network Time Protocol (SNTP) is a protocol for synchronising the clocks of computer systems over packet switched, variable-latency data networks. It is a simpler and less accurate version of the Network Time Protocol (NTP).

### Synchronisation cable

These synchronisation cables can be used to synchronise several SIRIUS® chassis with each other.

#### **USB**

Universal Serial Bus is a specification to establish communication between devices and a host controller (usually PCs). SIRIUS® systems use a USB connection to connect to a PC.

#### Windows®

A PC operating system by Microsoft®. DewesoftX® will work on Windows® 10, Windows® 7 Windows® XP, Windows® Vista and Windows®. Windows® is a registered trademark of Microsoft Corporation in the United States and other countries.

KRYPTON® V20-1 134/142



# 12. Warranty information

#### Notice

The information contained in this document is subject to change without notice.

#### Note:

Dewesoft d.o.o. shall not be liable for any errors contained in this document. Dewesoft MAKES NO WARRANTIES OF ANY KIND WITH REGARD TO THIS DOCUMENT, WHETHER EXPRESS OR IMPLIED. DEWESOFT SPECIFICALLY DISCLAIMS THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. Dewesoft shall not be liable for any direct, indirect, special, incidental, or consequential damages, whether based on contract, tort, or any other legal theory, in connection with the furnishing of this document or the use of the information in this document.

The copy of the specific warranty terms applicable to your Dewesoft product and replacement parts can be obtained from your local sales and service office. To find a local dealer for your country, please visit <a href="https://dewesoft.com/support/distributors">https://dewesoft.com/support/distributors</a>.

### 12.1. Calibration

Every instrument needs to be calibrated at regular intervals. The standard norm across nearly every industry is annual calibration. Before your Dewesoft data acquisition system is delivered, it is calibrated. Detailed calibration reports for your Dewesoft system can be requested. We retain them for at least one year, after system delivery.

## 12.2. Support

Dewesoft has a team of people ready to assist you if you have any questions or any technical difficulties regarding the system. For any support please contact your local distributor first or Dewesoft directly.

Dewesoft d.o.o. Gabrsko 11a 1420 Trbovlje Slovenia

Europe Tel.: +386 356 25 300 Web: http://www.dewesoft.com

The telephone hotline is available Monday to Friday from 07:00 to 16:00 CET (GMT +1:00)

# 12.3. Service/repair

The team of Dewesoft also performs any kind of repairs to your system to assure safe and proper operation in the future. For information regarding service and repairs please contact your local distributor first or Dewesoft directly on <a href="https://dewesoft.com/support/rma-service">https://dewesoft.com/support/rma-service</a>.

# 12.4. Restricted rights

Use Slovenian law for duplication or disclosure. Dewesoft d.o.o. Gabrsko 11a, 1420 Trbovlje, Slovenia / Europe.

KRYPTON® V20-1 135/142



### 12.5. Copyright

Copyright © 2015-2019 Dewesoft d.o.o. This document contains information that is protected by copyright. All rights are reserved. Reproduction, adaptation, or translation without prior written permission is prohibited, except as allowed under the copyright laws. All trademarks and registered trademarks are acknowledged to be the property of their owners.

### 12.6. Trademarks

We take pride in our products and we take care that all key products and technologies are registered as trademarks all over the world. The Dewesoft name is a registered trademark. Product families (KRYPTON, SIRIUS, DSI, DS-NET, IOLITE) and technologies (DualCoreADC, SuperCounter, GrandView) are registered trademarks as well. When used as the logo or as part of any graphic material, the registered trademark sign is used as a part of the logo. When used in text representing the company, product or technology name, the ® sign is not used. The Dewesoft triangle logo is a registered trademark but the ® sign is not used in the visual representation of the triangle logo.

KRYPTON® V20-1 136/142



# 13. Safety instructions

Your safety is our primary concern! Please be safe!



### Caution

Be careful to not connect the power supply on both ends of the EtherCAT chain. This connection will permanently damage the devices.



How to **not** connect the PS in ECAT chain

# 13.1. General Safety Instructions



## **Warning**

The following general safety precautions must be observed during all phases of operation, service, and repair of this product. Failure to comply with these precautions or with specific warnings elsewhere in this manual violates safety standards of design, manufacture, and intended use of the product. Dewesoft GmbH assumes no liability for the customer's failure to comply with these requirements.

All accessories shown in this document are available as an option and will not be shipped as standard parts.

### 13.1.1. Environmental Considerations

Information about the environmental impact of the product.

KRYPTON® V20-1 137/142



### 13.1.2. Product End-of-Life Handling

Observe the following guidelines when recycling a Dewesoft system:

#### **System and Components Recycling**

Production of these components required the extraction and use of natural resources. The substances contained in the system could be harmful to your health and to the environment if the system is improperly handled at its end of life! Please recycle this product in an appropriate way to avoid unnecessary pollution of the environment and to keep natural resources.



This symbol indicates that this system complies with the European Union's requirements according to Directive 2002/96/EC on waste electrical and electronic equipment (WEEE). Please find further information about recycling on the Dewesoft web site <a href="https://www.dewesoft.com">www.dewesoft.com</a>

#### **Restriction of Hazardous Substances**

This product has been classified as Monitoring and Control equipment and is outside the scope of the 2002/95/EC RoHS Directive. However, we take care of our environment and the product is lead-free.

### General safety and hazard warnings for all Dewesoft systems

- Safety of the operator and the unit depend on following these rules.
- Use this system under the terms of the specifications only to avoid any possible danger.
- Read your manual before operating the system.
- Observe local laws when using the instrument.
- DO NOT touch internal wiring!
- DO NOT use higher supply voltage than specified!
- Use only original plugs and cables for harnessing.
- You may not connect higher voltages than rated to any connectors.
- The power cable and -connector serve as Power-Breaker. The cable must not exceed 3 meters, the disconnect function must be possible without tools.
- Maintenance must be executed by qualified staff only.
- During the use of the system, it might be possible to access other parts of a more comprehensive system. Please read and follow the safety instructions provided in the manuals of all other components regarding warning and security advice for using the system.
- With this product, only use the power cable delivered or defined for the host country.
- DO NOT connect or disconnect sensors, probes or test leads, as these parts are connected to a voltage supply unit.
- Ground the equipment: For Safety Class 1 equipment (equipment having a protective earth terminal), a non-interruptible safety earth ground must be provided from the mains power source to the product input wiring terminals.
- Please note the characteristics and indicators on the system to avoid fire or electric shocks. Before connecting the system, please read the corresponding specifications in the product manual carefully.
- The inputs must not, unless otherwise noted (CATx identification), be connected to the main circuit of category II, III and IV.

KRYPTON® V20-1 138/142



- The power cord separates the system from the power supply. Do not block the power cord, since it has to be accessible for the users.
- DO NOT use the system if equipment covers or shields are removed.
- If you assume the system is damaged, get it examined by authorized personnel only.
- Adverse environmental conditions are moisture or high humidity dust, flammable gases, fumes
  or dissolver, thunderstorm or thunderstorm conditions (except assembly PNA), electrostatic
  fields, etc.
- The measurement category can be adjusted depending on module configuration.
- Any other use than described above may damage your system and is attended with dangers like short-circuiting, fire or electric shocks.
- The whole system must not be changed, rebuilt or opened.
- DO NOT operate damaged equipment: Whenever it is possible that the safety protection features built into this product have been impaired, either through physical damage, excessive moisture, or any other reason, REMOVE POWER and do not use the product until the safe operation can be verified by service-trained personnel. If necessary, return the product to Dewesoft sales and service office for service and repair to ensure that safety features are maintained.
- DO NOT service or adjust alone. Do not attempt internal service or adjustment unless another person, capable of rendering first aid and resuscitation, is present.
- If you assume a more riskless use is not provided anymore, the system has to be rendered inoperative and should be protected against inadvertent operation. It is assumed that a more riskless operation is not possible anymore if the system is damaged obviously or causes strange noises. The system does not work anymore. The system has been exposed to long storage in adverse environments. The system has been exposed to heavy shipment strain.
- DO NOT touch any exposed connectors or components if they are live wired. The use of metal bare wires is not allowed.
- There is a risk of short circuit and fire hazard!
- Warranty void if damages caused by disregarding this manual. For consequential damages, NO liability will be assumed!
- Warranty void if damages to property or persons caused by improper use or disregarding the safety instructions.
- Unauthorized changing or rebuilding the system is prohibited due to safety and permission reasons (CE).
- Be careful with voltages >25 VAC or >35 VDC! These voltages are already high enough in order to get a perilous electric shock by touching the wiring.
- The product heats during operation. Make sure there is adequate ventilation. Ventilation slots must not be covered!
- Only fuses of the specified type and nominal current may be used. The use of patched fuses is prohibited.
- Prevent using metal bare wires! Risk of short circuit and fire hazard!
- DO NOT use the system before, during or shortly after a thunderstorm (risk of lightning and high energy over-voltage). An advanced range of application under certain conditions is allowed with therefore designed products only. For details please refer to the specifications.
- Make sure that your hands, shoes, clothes, the floor, the system or measuring leads, integrated circuits and so on, are dry.
- DO NOT use the system in rooms with flammable gases, fumes or dust or in adverse environmental conditions.
- Avoid operation in the immediate vicinity of high magnetic or electromagnetic fields, transmitting antennas or high-frequency generators, for exact values please refer to enclosed specifications.

KRYPTON® V20-1 139/142



- Use measurement leads or measurement accessories aligned with the specification of the system only. Fire hazard in case of overload!
- Do not switch on the system after transporting it from a cold into a warm room and vice versa. The thereby created condensation may damage your system. Acclimatise the system unpowered to room temperature.
- Do not disassemble the system! There is a high risk of getting a perilous electric shock. Capacitors still might be charged, even if the system has been removed from the power supply.
- The electrical installations and equipment in industrial facilities must be observed by the security regulations and insurance institutions.
- The use of the measuring system in schools and other training facilities must be observed by skilled personnel.
- The measuring systems are not designed for use by humans and animals.
- Please contact a professional if you have doubts about the method of operation, safety or the connection of the system.
- Please be careful with the product. Shocks, hits and dropping it from already- lower level may damage your system.
- Please also consider the detailed technical reference manual as well as the security advice of the connected systems.

This product has left the factory in safety-related flawlessness and in proper condition. In order to maintain this condition and guarantee safety use, the user has to consider the security advice and warnings in this manual.

KRYPTON® V20-1 140/142



# 14. Documentation version

Doc-Version	Date [dd.mm.yyyy]	Notes
v20-1	15.06.2020	<ul> <li>The NEW Krypton manual - Reworked and revised version</li> <li>Added products:         <ul> <li>KRYPTONi-1xCAN-FD</li> <li>KRYPTONi-8xLA</li> <li>Mounting plates</li> </ul> </li> </ul>
V20-2	25.11.2020	<ul><li>Remote-on pin description for Krypton CPU</li><li>PWM option explanation</li></ul>

KRYPTON® V20-1 141/142



# 14.1. Previous versions history

Doc-Version	Date [dd.mm.yyyy]	Notes
1.0.0	23.11.2015	Initial version
1.1.0	14.04.2016	<ul> <li>Added RTD module</li> <li>Added ECAT Power Injector</li> <li>Added "Table 7: Max. Error by Thermocouple type"</li> </ul>
1.1.1	02.06.2016	<ul> <li>Table 11: Krypton RTD Specifications</li> <li>Updated Accuracy</li> <li>Added Temperature drift</li> </ul>
1.1.2	17.07.2018	Added excitation information for RTD and TH
2.0.0	20.09.2018	<ul> <li>Added KRYPTON-4xACC,KRYPTON-8xACC</li> <li>Added KRYPTONI-2xCAN-USB</li> <li>Added KRYPTON ONE product line: <ul> <li>KRYPTONI-1xACC</li> <li>KRYPTONI-1xAO</li> <li>KRYPTONI-1xCAN</li> <li>KRYPTONI-4xDI</li> <li>KRYPTONI-4xDO</li> <li>KRYPTONI-1xHV</li> <li>KRYPTONI-1xLV</li> <li>KRYPTONI-1xSTG</li> <li>KRYPTONI-1xTH-HV</li> </ul> </li> <li>Added KRYPTON-CPU</li> <li>Added ECAT GPS Junction</li> </ul>
2.0.1	23.01.2019	<ul> <li>Changed figure 4.7.3.1. KRYPTON Multichannel DIO modules: connectors</li> </ul>
		THE END



For further information or pricing, please contact us:

Melbourne 03 9872 4592 Sydney 02 9460 4355 Brisbane 07 3868 4255 Adelaide 08 8343 8516

sales@metromatics.com.au www.metromatics.com.au

KRYPTON® V20-1 142/142