


Ethernet I/O: BusWorks® NT Series

NT2230 Ethernet Analog I/O Modules





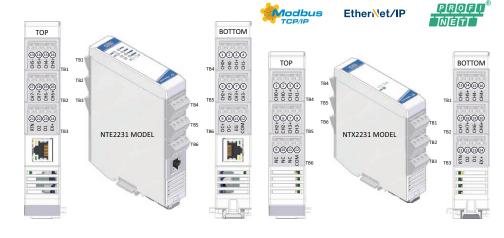

8 differential voltage inputs ◆ 2 discrete I/O ◆ Ethernet I/O plus Expansion I/O ◆ Multi-protocol support

The BusWorks® NT2000 series offers a costeffective, modular solution for Ethernet remote I/O systems. Two module types are available. NTE Ethernet models provide the protocol interface plus I/O signal processing channels. NTX expansion modules add extra I/O channels when mated to any NTF Fthernet communication module.

NT2230 modules offer 8 voltage inputs and 2 bidirectional discrete digital I/O channels. Each input has true differential 16-bit A/D. NTE Ethernet models provide a compact network interface to monitor sensor levels or 0-10V devices. Appending NTX expansion models can interface up to 32 differential voltage inputs on a single IP address.

Applications include collecting pressure, HVAC levels, temperature, and other data at sensors, transducers, or transmitters. The 0-10V signal is very commonly used for automation and environmental controllers.

An isolated RS-485 bus links up to three expansion modules to the Ethernet module with connectors that join along the DIN rail. This internal NT bus distributes power and communication between the modules. Users can mix analog, temperature, and discrete I/O modules across the NT bus.

Acromag's i20® messaging technology allows direct peer-to-peer or multicast communication between remote modules without a master controller.

> Easily configure I/O modules using any web browser.

Stot 3: Analog Voltage in Board (Differential) The following options are unique for each channel: Channel	Sion 3: Analog Voltage in Board (Differential) The following options are unique for each channet: Channet Channet Change Range 1907 The following options are shared for all channets: Current Rings 1907 The following options are shared for all channets: Current Rings (App Rings Seection) (App Rings Seection) (App Rings Address) (App Rings Addr	romag 🔀	8 Network I/O Confi	g Counters F	P2P Multicast	Calibration	Diagnostics	Utility	Logged In As a Change Pass Lo
Slot 3: Analog Voltage in Board (Differential) The following options are unique for each channel: Channel: Channel: Channel: 100 Change Range: 100 The following options are shared for all channels: Current Range: 100 Change Rang	Siot 3: Analog Voltage in Board (Differential) The following options are unique for each channet: Channet Channet Channet I Change Range 1907 The following options are shared for all channels: Current Range 1907 The following options are shared for all channels: Current Range 1909 The following options are shared for all channels: Current Range Selection: ADC Settling Delay: Night Race. 400 ms Opa Change Filter Selection: Change Filter Selection: Night Race. 400 ms Opa Change Filter Selection: Digital Channet: Digital Channet: Digital Channet: Current Watchdog Timeout (ms): Current Watchdog Timeout (ms): Change Watchdog State:	1/0 C ('-							
The following options are unique for each channel: Channel: Cannel: Cannel: 107 The following options are shared for all channels: Current Filter Selection: ADC Settling Delay: 1993 Filter, 400m Change Filter Selection: Change Filter Selection: Change Filter Selection: Change Filter Selection: Ouge ADC Settling Delay: 1993 Filter, 400m Opis Change Filter Selection: Selec	The following options are unique for each channel: Current Range: 100 Change Range: 1100 The following options are shared for all channels: Current Rifler Selection: ADC Settling Dalay: High Filter, 40thms Opa Change Rifler Selection: Change ADC Settling Dalay: High Filter, 40thms Opa Change State I good op set of the control		-						
Channel Coarrent Range: 100' The following options are shared for all channels: Current Rifer Selection: ADC Settling Delay: In Sigh Filter Selection: Change Rifer Selection: Change Sod 3 Comparation The following options are for digital channels: Digital Channel: Digital Channel: Current Watchdog Timeout (ms): Current Watchdog State:	Channel Courset Range: 1202 The following options are shared for all channels: Current Rings 1307 The following options are shared for all channels: Current Rings Selection: 1309 Change Filter Selection: 1309 Change Watchdog Timeout: 1300 Change Watchdog State:								
Carrent 8 ange:	Courset 1 Current Range 100 Change Range 100 The following options are shared for all channels: Current Rines Section ADC Settling Delay: High Filter, 400ms Opa Opa Change Filter Selection: Longe ADC Settling Delay: High Filter, 400 ms Opa Change Stot Quarter Change Stot Quarter Courset March Ado ms Opa Change Stot Quarter Current Watchdog Timoout (ms): Change Watchdog Timoout (ms): Change Watchdog Timoout Change Watchdog State:		tor each channel:						
Current Range: 107 The following options are shared for all channels: Current Rifer Selection: ADC Settling Delay: Injust Fast Address Opa Settling Delay: Steph Fast Address Opa Settling Delay: Change Rifer Selection: Change Rifer Selection: Opa Settling Delay: Opa Settling Delay: Opa Settling Delay: Change Set 3 Settling Delay: Opa Settling Delay: Opa Settling Delay: Opa Settling Delay: Change Set 3 Settling Delay: Change Sett	Curvert Range: 100 The following options are shared for all channels: Curvert Filter Selection: (Lings Filter Selectio		ฉ						
Latory Change Bange: 1870 The following options are shared for all channels: Current Miles Selection: ADC Settling Delay: (high Tites, 400 m) Change ADC Settling Delay: (high Tites, 400 m) Change ADC Settling Delay (high Tites, 400 m) Change ADC Settling Delay (high Tites, 400 m) Change ADC Settling Delay Change ADC Settling Dela	Change Range 1907 The following options are shared for all channels: Current Filler Selection: Mopt Filter, 400ms Opu Opu Change Filter Selection: Moph Filter, 400ms Opu Change Filter Selection: Digital Channel: Digital Channel: Digital Channel: Current Watchdog Timeout (ms): Change Watchdog Timeout Change Watchdog Timeout Change Watchdog Timeout Change Watchdog Timeout Change Watchdog State:		ט						
Change Range: 107 The following options are shared for all channels: Current Filter Selection: Figs Filter, 400m Change Rifler Selection: Change Soc 3 Configuration The following options are for digital channels: Digital Channel: Digital Channel: Current Watchdog Timeout (ms): Current Watchdog State:	Change Range		٦						
The following options are shared for all channels: Current Filter Selection: ADC Settling Delay: (Step) Filter, 4000 m (Oppure Soil 3 Content Soil 4 Content Soil 5 Con	strov The following options are shared for all channels: Current Filter Selection: (Lingh Titter, 400 m) (Ling		J						
The following options are shared for all channels: Current Filter Selection: AD C Settling Delay: Ingip Tainer, attlome. O par Change Filter Selection: Change ADC Settling Delay O par Change ADC Settling Delay O par O par Change ADC Settling Delay Change ADC Settling Delay Change ADC Settling Delay O par Change ADC Settling Delay Change ADC Settling Delay Change ADC Settling Delay O par Change ADC Settling Delay Change ADC Set	The following options are shared for all channels: Curvet Filter Selection ADC Settling Delay: High Filter, 460ms Opa Opa Change Filter Selection: Lingh Filter, 460 ms Opa Change Filter Selection: Lingh Filter, 460 ms Opa Change Sol 1 Change Sol 2 Change Sol 2 Current Watchdog Timeout (ms): Change Watchdog Timeout Change Watchdog Timeout Change Watchdog State: Change Watchdog State:		a a a a a a a a a a a a a a a a a a a						
Current Watchdog Timeout (ms): Current Watchdog State:	Current Matchdog Timeout (ms): Current Watchdog State:		_						
High Filter, 480ms O par Change Filter Selection: Change ADC Settling Delay High Filter, 40m O par Change Soil 3 C	Nigh Titler, 400ms	The following options are shared	for all channels:						
Change Filter Selection: Change ACC Settling Delay Sign Filter, 400 ms	Change Filter Selection: Keph Tax. kdb mm O O O	Current Filter Selection:	ADC Settling Delay:						
Migh Risec. 400 ms	Ingh Filter, 480 ms	High Filter, 480ms	0 μs						
Charge Soil 3 Configeration The following options are for digital channels: Digital Channel: Digital Channel 1 Current Watchdog Timeout (ms): Current Watchdog State:	Change Soid 3 Configuration The following options are for digital channels: Digital Channel. Digital Channel 1 Current Watchdog Timeout (ms): Current Watchdog Timeout (ms): Change Watchdog Timeout: Change Watchdog State:	Change Filter Selection:	Change ADC Settling Delay						
Configuration The following options are for digital channels: Digital Channel: Digital Channel 1 Current Watchdog Timeout (ms): Current Watchdog State:	Configuration The following options are for digital channels: Digital Channel: Digital Channel 1 Current Watchdog Timeout (ms): Current Watchdog Timeout (ms): Change Watchdog Timeout: Change Watchdog State:	High Filter, 480 ms	- 0 μs	v					
Configuration The following options are for digital channels: Digital Channel: Digital Channel 1 Current Watchdog Timeout (ms): Current Watchdog State:	Configuration The following options are for digital channels: Digital Channel: Digital Channel 1 Current Watchdog Timeout (ms): Current Watchdog Timeout (ms): Change Watchdog Timeout: Change Watchdog State:	Change Stat 2							
Digital Channel: Digital Channel 1 Current Watchdog Timeout (ms): Current Watchdog State:	Digital Channel: Digital Channel: Updat Clannel: Updat Clan	Configuration							
Digital Channel: Digital Channel 1 Current Watchdog Timeout (ms): Current Watchdog State:	Digital Channel: Digital Channel: Updat Clannel: Updat Clan		-						
Digital Channel 1 Current Watchdog Timeout (ms): Current Watchdog State:	Digital Channel 1 Current Watchdog Timeout (ms): Current Watchdog State: S000 Change Watchdog Timeout: Change Watchdog State:		or digital channels:						
Current Watchdog Timeout (ms): Current Watchdog State:	Current Watchdog Timeout (ms): Current Watchdog State: 5000	The following options are fo							
	\$5000 On Change Watchdog Timeout: Change Watchdog State:								
	\$5000 On Change Watchdog Timeout: Change Watchdog State:	Digital Channel:	~						
	Change Watchdog Timeout: Change Watchdog State:	Digital Channel: Digital Channel 1	(ms): Current Watchdog Sta	te:					
		Digital Channel: Digital Channel 1 Current Watchdog Timeout		ite:					
Change Watchdog Timeout: Change Watchdog State:		Digital Channel: Digital Channel 1 Current Watchdog Timeout		ite:					

Key Features & Benefits

- Configured over Ethernet with web browser
- Expandable I/O capacity, up to 58 I/O channels of mixed signal types on one IP address
- Field-selectable Modbus TCP/IP. EtherNet/IP. or Profinet communication
- i2o peer-to-peer or multicast communication
- Dual RJ45 ports enable daisy chain topology
- Eight voltage inputs with true differential node pairs referenced to input common
- Accepts ±1/5/10V and 0 to 1/5/10V inputs
- Discrete I/O can monitor and control equipment with TTL or 32V logic levels
- *OPC-UA, *MQTT and *RESTful API lloT support
- Conditional logic for rule-based I/O operation
- Advanced *alarm and *data logging functions
- 1500V isolation between I/O, network, and power
- Thin 25mm housing with pluggable terminals
- Wide temperature operation (-40 to 70°C)
- CE compliant. UL/cUL Class 1 Div 2 and ATEX/IECEx Zone 2 approvals.
- * Coming soon. Consult factory for availability.



Tel 877-214-6267 ■ sales@acromaq.com ■ www.acromag.com ■ 30765 Wixom Rd, Wixom, MI 48393 USA



Ethernet I/O: BusWorks®NT Series

NT2230 Ethernet Analog I/O Modules

Performance Specifications

Ethernet Interface (NTE models only)

Communication

Configurable for Modbus TCP/IP, EtherNet/IP, and Profinet.

10/100Mbps data rate, auto-sensing.

IP Address

Default 192.168.0.10. Configurable static IP or DHCP.

Analog Inputs

A/D Converter

Eight input channels differentially multiplexed to a 24-bit sigma-delta ADC through unity-gain differential buffers (only 16-bits are used).

Input Voltage Ranges

±1V, ±5V, ±10V, 0-1V, 0-5V, 0-10V. Inputs are referenced to input common (COM) using resistive dividers at each input node and do not float.

Input Accuracy

Better than ±0.05% of span typical, ±0.1% maximum.

Discrete Inputs (Active-Low)

Input Signal Voltage Range 0 to +32V DC.

Input Current

280µA, typical at 32V DC.

Input Signal Threshold

TTL compatible w/100mV of hysteresis, typical. 1.7V DC Low-to-High, 1.6V DC High-to-Low. 0.8V DC TTL LOW limit, 2.0V DC TTL HIGH limit.

Input Resistance

100K ohms typical (input only), ~10K ohms with internal pull-ups.

Input Response Time

5ms typical, not including network time.

Discrete Outputs (Sinking)

Output "OFF" Voltage Range 0 to 32V DC.

Output "ON" Current Range

0 to 250mA DC, continuous.

Output Rds ON Resistance

0.8 ohms typical, 1.6 ohms maximum.

Output Response Time

5ms typical. Does not include network time.

General I/O

Input Update/Conversion Rate

Fresh data available to the network every 10ms.

Response Time from an Ethernet command

Less than 5ms, typical.

Excitation

External voltage of 4-32V required between I/O EXC and any RTN for DI/O. Excitation must source 52mA minimum (at 32V). For 2 channels at 250mA max rated load, excitation must source 0.5A min.

I/O Pull-Ups (Internal)

Each discrete I/O channel has a 10KΩ pull-up to EXC to pull the tandem open drain output and input high/OFF.

Environmental and Physical

Temperature and Humidity

Operating: -40 to +70°C (-40 to +158°F). Storage: -40 to +85°C (-40 to +185°F). Relative Humidity: 5 to 95%, non-condensing.

1500V AC for 60 seconds and 250V AC or 354V DC continuous between I/O channels (group), each network port and power circuits.

Power Supply

10-32V DC SELV power wired to NTE model only. Power to NTX models is via NT bus connection.

Power Consumption

NTE2231: <=1.5W (input). NTX2231: <=0.5W max. (each).

Dimensions (width x height x depth)

NTE: 25 x 116.9 x 139.2 mm (0.98 x 4.6 x 5.48 inches). NTX: 25 x 116.9 x 116.65 mm (0.98 x 4.6 x 4.59 inches).

Weight

NTE: 0.5 lbs (0.23 kg). NTX: 0.3 lbs (0.14 kg).

Standards and Certifications

Electromagnetic Compatibility (EMC) CE marked, per EMC Directive 2004/108/EC.

Safety Approvals

UL/cUL: Class I; Div 2; Groups A, B, C, D. ATEX/IECEx: Zone 2.

Ordering Information

Models

Go to on-line ordering page >

NTE2231-1111

Ethernet I/O module with dual RJ45 ports, 8 differential voltage inputs and 2 discrete I/O

Expansion I/O module with 8 differential voltage inputs and 2 discrete I/O

Accessories

5035-369

5035-370

Ethernet patch cable, low EMI, double-shielded. 3 feet (5035-369) or 15 feet (5035-370).

Power supply, 24V DC, 15W output. See www.acromag.com for other sizes.



