

Argon Small Display – ASD70

Rugged Military Displays for Dismounted or Mounted Operations



ASD70 – Rugged 7.0” Display –Hand Held Versions or Dismounted

Argon offers a family of rugged military displays which are designed for airborne, land based vehicle or handheld applications. These displays have the smallest footprints on the market and are extremely lightweight and consume low power. The ASD70 provides excellent display performance where size, weight, and power are at a premium, and Argon stands ready to customize the unit to fit specific program needs.

Over the years Argon has been developing and delivering compact displays that can be used for mounted or dismounted operations. For dismounted, displays can be configured with a variety of controls and connectors and are suitable for interfacing to the soldier level computer and/or batteries. The displays use little power in normal operation. A touch screen and high brightness option are available. For mounting, a variety of helicoil inserts are available to ensure that the unit can be mounted for nearly any application.

Argon has several existing configurations to choose from or the display can be mechanically configured to meet your exact program requirements.


Main Features:

- Extremely Small Mechanical Outline
- Low Weight/Power
- Daylight Readability (option)
- Ruggedized, Touch Screen (option)
- Customizable Connector(s) and Connector Location(s)
- Customizable User Features/Controls

Argon Corp has over 25 years of experience designing, producing and supporting a variety of rugged computing and display solutions that serve land based, naval and airborne applications. These solutions are also suitable for adjacent applications where extreme, combat like environments are present, such as oil and gas exploration, and mining activities.

Argon has developed a standing reputation for working with customers to design custom solutions and reliable products. Add to this extensive industry knowledge and Argon is a partner you can trust.

Sept 2016

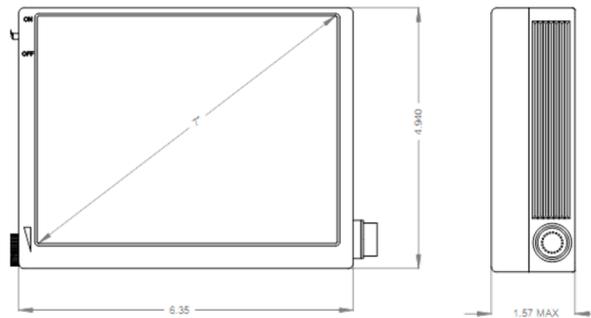

Technical Specifications for ASD70 (Typical)

Optical	
Viewable Area	7.0" Diagonal
Display Type	TFT LCD w/ LED Backlight
Resolution	800x400 or 1024x600 (only wide formats)
Contrast Ratio	600:1
Brightness	300 nits Typical, 750 nits with High Bright Option
Touch Screen	Ruggedized, Analog Resistive
Overall Unit	
Dimensions (Typical)	6.35" x 4.94" x 1.57" (typical)
Weight	1.8 +-lbs
Power Input	9 to 36VDC
Power Consumption	8W Typical, 10.5W with High Bright Option
I/O	RGB/DVI, Power, USB/232 (For Touch Option)
Connectors	Glenair Mighty Mouse® or Specify
Enclosure	Aluminum, Enclosed
User Controls	On/Off, Day/Night, OSD, Brightness, Bezel Buttons, Attached Stylus, others Specify
Other	Customizations and Adaptations Available on Request
Environmental	Meets, but not Limited to, the Following Selected Specifications
Operating Temp	-10°C to +55°C (-40°C optional)
Storage Temp	-40°C to +70°C
Shock	40g, 11msec
Vibration	2.25grms Random
EMI/EMC	Designed to MIL-STD-461
Altitude	Up to 40kft Operating. Non Operating
Salt Fog, Sand/Dust	Resistant to Salt Fog, Unit is 100% Enclosed
Humidity	Operating & Storage – 95% @ 25°C, Non-condensing

