

The 6013 input module has eight channels, each with programmable gain instrumentation amplifier, low pass filter and sample and hold. The high level outputs are multiplexed and digitized to 16 bits then output to the 6000 data bus. A ninth reference temperature channel conditions the output of the temperature sensor in the Model 6084 thermocouple reference junction. Each channel has a wideband analog output.

The 6013 may be configured for use with voltage, thermocouple and current transducers. It provides $\pm 12/15$ Volt power for transducers with integral electronics. Versions are available for current loop, high voltage and 28 Volt powered transducers.

Voltage substitution is provided for channel gain calibration utilizing an external voltage standard. A calibration attenuator enables the voltage standard to be used on its highest accuracy ranges and provides a post-attenuator output for calibration and verification. Using Pacific's PI660 software zero and gain calibration and correction are automatic.

The four-pole, low-pass filter uses an easily changed plug-in module to set bandwidth. Either the wideband or filtered output may be digitized and sent to the 6000 data bus. Two programmable alarms each with upper and lower limits are checked each time the outputs are digitized.

SPECIFICATIONS

INPUT

Configuration8 channels, differential, 2 wire with shield.
Protection ± 50 Volts differential, ± 30 Volts common mode.
 ± 250 Volts differential with attenuator.

VOLTAGE

Range ± 2 mV to ± 10 Volts (± 200 mV to ± 100 V with optional attenuator).
Attenuator100:1, $\pm 0.2\%$ (6013-HV).
Impedance50 Megohms, shunted by 1,000 pF (1 Megohm with attenuator).

THERMOCOUPLE

TypeB, C, E, J, K, N, R, S, and T.
ConfigurationDifferential, 2 wire with shield.

CURRENT LOOP (6013-I)

Loop Power28 Volts, 0 to 20 mA.
Termination200 Ohm, $\pm 0.1\%$

TRANSDUCER POWER


VoltageRegulated ± 12 or ± 15 Volts jumper selectable per channel (6013). 28 Volts (6013-24V)
Current50 mA per channel, limited to 200 mA maximum per 8-channel module.

AMPLIFIER

GainProgrammable 1-5000, in 1, 2, 3, 5, 10 steps, with $\pm 0.05\%$ accuracy.
Gain Stability $\pm 0.01\%$, $\pm 0.005\%/^{\circ}\text{C}$.
Bandwidth1 kHz (-3dB).
Linearity $\pm 0.01\%$ for gains < 1,000, $\pm 0.02\%$ for gains 1,000 and higher.
Common Mode80 dB plus gain in dB to 110 dB, DC to 60 Hz.
CM Voltage ± 10 Volts.
ZeroAutomatic to ± 1 μV RTI, ± 0.5 mV RTO.
Zero Stability ± 5 μV RTI, ± 1 mV RTO. ± 1 $\mu\text{V}/^{\circ}\text{C}$ RTI, ± 0.2 mV/ $^{\circ}\text{C}$ RTO. Short term: ± 2 μV RTI, ± 0.4 mV RTO for 8 hours.
Source Current ± 10 nA, ± 1 nA/ $^{\circ}\text{C}$.
Noise (10 Hz)0.1 μV rms, RTI, 0.5 mV rms, RTO.
Noise (1 kHz)1.0 μV rms, RTI, 0.5 mV rms, RTO.
Recovery800 μs to $\pm 0.1\%$ for 10X overload to ± 10 V
Monitor Output ± 3.0 Volts full scale, unfiltered.

FILTER

TypeFour-pole, low-pass Butterworth.
FrequencyPlug-in, 4 Hz to 1 kHz, 10 Hz supplied. Alternate filter characteristics and frequencies are available.

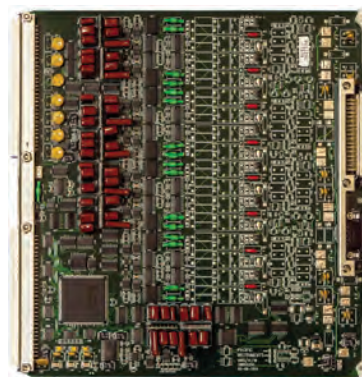

FEATURES

- Voltage, thermocouple & DC-LVDT inputs
- Optional thermocouple reference junction box
- Gains 1 to 5,000 with 0.05% accuracy
- Automatic zero & gain calibration
- Four-pole, low-pass filter
- Up to 10 kS/s per channel with 16-bit resolution
- Two alarms with programmable upper & lower limits

DIGITIZER

SampleSimultaneous sample and hold with ± 50 nS channel-to-channel. Droop is less than $\pm 0.005\%$.
Resolution16 bits, two's complement output.
Sample RateUp to 10 kS/s per channel.
Linearity ± 2 LSB ($\pm 0.006\%$).
ContinuityMonotonic to 15 bits.
AlarmsTwo alarms each with upper and lower limits that are programmable from negative to positive full scale. Limits checked on each ADC sample.

CALIBRATION

Voltage Subst.Alternate input for external voltage standard. Programmable attenuation steps of 1, 0.1, and 0.01 with $\pm 0.01\%$ accuracy. Output of the attenuator is provided on a rear panel connector for calibration.
ZeroAmplifier input disconnected and shorted.

MECHANICAL

MountingOccupies one slot in Series 6000 enclosures.
ConnectorsInput connector is 50-pin Type D. Connectors are mounted on the front and mates are supplied.
Temperature0 $^{\circ}\text{C}$ to +50 $^{\circ}\text{C}$ operating.

ACCESSORIES

THERMOCOUPLE REFERENCE JUNCTION (6084)

Junction $\pm 0.4^{\circ}\text{C}$ over the range of 10 to 50 $^{\circ}\text{C}$. Includes junction temperature sensor.
Termination8 channels, screw terminals, #18 to #28 wire.
Cable2 meter cable is standard, other lengths available.
Size3-3/4" wide, 3-3/4" high, 2" deep.

SCREW TERMINAL ADAPTER (6081)

Termination8 channels, screw clamp terminals for inputs and outputs, #18 to #28 wire.
MountingInstalls on the front of the input module behind the enclosure door.

ORDERING INFORMATION

60138-Ch Voltage/Thermocouple, ± 12 V or ± 15 V Power.
6013-I8-Ch Current Loop.
6013-HV8-Ch Voltage, 100:1 Attenuator
6013-24V8-Ch Voltage/Thermocouple 28V Power.
60818-Ch Screw Terminal Adapter.
60848-Ch Thermocouple Reference Junction.