



Field tested, failsafe, and long life performance in extreme conditions. As processing performance continues to improve, Crystal Group is dedicated to minimize the SWaP envelope of the RS255. High-end computing performance in a 2U chassis with a depth of 20" (50.8 cm) fits most any rack space.

Crystal Group Rugged Servers provide high-performance computing and high-capacity data storage in a rugged, all-aluminum package able to withstand the roughest terrains and toughest applications. Crystal Group's highly customizable Rugged Servers are used by the U.S. Armed Forces, Foreign Military, Power Distribution, Autonomous Vehicles, Oil & Gas, and others for everything from communications and networking to weapons control, sensor and surveillance, and unmanned aircraft systems.

Innovative solutions. Crystal Group's portfolio of rugged and industrial computing products are engineered and tested to withstand challenging environments, meet and exceed military and industrial standards, and provide the latest COTS technologies and benefits, such as cost, availability, upgradability, and flexibility.

Dependable services. When a computing application requires a custom solution, Crystal Group delivers – on time and on budget – with professional services, including product design and development, testing, systems engineering and integration, mechanical and electrical engineering, configuration management, and product lifecycle planning.

Dedicated support. Crystal Group's expert staff and global network provide fast and effective product support when and where it is needed, whether in-house or in the field. Count on Crystal Group for fast response times, quick turnarounds, 5+ year warranties, and quality service around the clock and around the globe.

FEATURES

- Light weight aluminum construction – 30-35 lbs.
- Easily mounted – Delrin glides, fixed mount, or Jonathan® rails
- Up to 512 GB of memory
- Rugged 2U, rack mounted 20" depth
- Five removable 3.5" HDDs or ten removable 2.5" SSDs
- Expandable with five low profile slots
- Intel® Xeon® processors

A clear advantage.

Specifications

Mechanical 2U

Height: 3.5" (8.89 cm)
Width: 17.5" (44.45 cm) [accepts Crystal Slides and Jonathan Rails] EIA-310 Rack Compliant
Depth: 20" (50.8 cm)
Weight: 30-35 lbs. (13.6-15.9 kg) [content dependent]

CPU

Intel® CPU architecture options from Intel embedded long-life roadmap
Intel® Broadwell Xeon® processors
Up to 18 core options per socket (dependent on motherboard)

Expansion

Five low profile slots; combination is configuration dependent
--

External Bay

Option 1: Five removable SATA or SAS 2.5" or 3.5" HDD
Option 2: Ten 2.5" SATA or SAS HDDs
Option 3: Can be combined with HDD option: One CD/DVD/BD (R/W)

Memory

16-512 GB DDR4 (motherboard dependent)
--

Mounting

Option 1: Mounted on Delrin glides
Option 2: Fixed mount, front and rear
Option 3: Jonathan rails

Power Supply

Option 1: 600W 120/240VAC W/PFC, 115VAC 400Hz
Option 2: 1200W 120/240VAC W/PFC, 115VAC 400Hz
Option 3: 1005W 18-36VDC

Environmental Standards

MIL-STD-810, Operational Temperature, Method 501/502 Procedure I/II: -15°C to +50°C, -40°C to +71°C with select processors ¹
MIL-STD-810, Storage, Method 501, Procedure I/II: -55°C to +85°C ¹
MIL-STD-810, Humidity, Method 507, Procedure II: 240 hours with humidity kit ¹
MIL-STD-810, Altitude, Method 500: 12,500ft operation, 40,000ft transport ¹
MIL-STD-810, Vibration, Method 514, Procedure I: 4.63 GRMS, 5-2,000Hz, 60 min/axis with solid state drives + vibration kits ¹
MIL-STD-810, Shock, Method 516, Procedures I/IV: 20g, 11msec-functional shock; 40g, 11msec crash hazard shock ¹
MIL-S-901, Grade A: With solid state drives + shock kits ¹
MIL-S-901, Grade B ¹

Electromagnetic Compatibility Standards


Some standards may require an internal kit
AC, FCC Compliant ¹
AC, MIL-STD-461, RE102, CE102 compliant ²
DC, MIL-STD-461, RE102, CE102 compliant ²
RTCA DO-160 Section 21, Category M ²

Cooling

Six high speed, high volume fans, CPU temperature controlled
--

Software Compatibility

Supports Windows 10®, Windows Server 2019®, VMware®, or Linux®
--

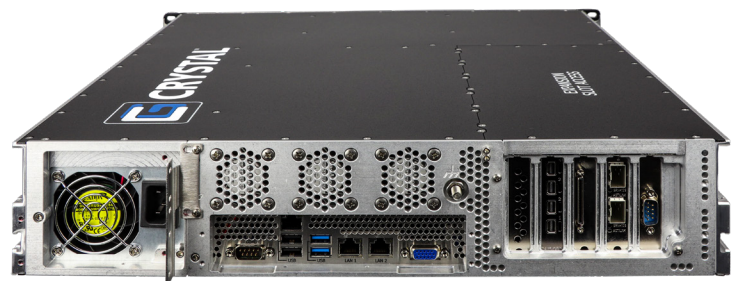

- 1 - Test report available
- 2 - Designed to meet standard

Notice: This document is for informational purposes only and does not set forth any warranty, expressed or implied, concerning any equipment, equipment feature, or service offered or to be offered by Crystal Group. Crystal Group reserves the right to make changes to this document at any time, without notice, and assumes no responsibility for its use. This informational document describes features that may not be currently available. Due to the numerous models and component combinations, some configuration testing remains pending. Please contact your Crystal Group Program Manager for test data on desired requirements. Export of technical data contained in this document may require an export license from the United States government. Design and specifications are subject to change.

