


Argon Rugged Display – ARD19

19" Rugged Display for C4ISR Platforms

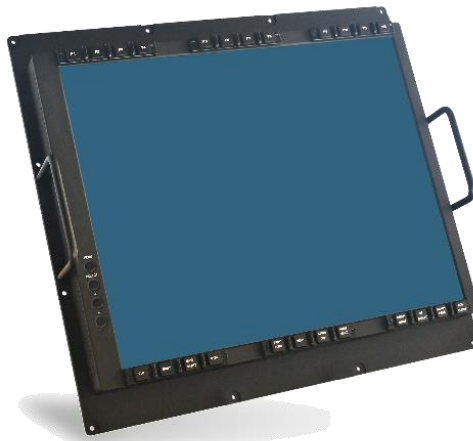

ARD19 Shown with Adapter Plate

Argon offers a 19" rugged display that is particularly suitable for Command & Control console applications where space is at a premium such as in combat & tactical vehicles, mobile shelters, and close-in naval spaces. The ARD19's small bezel size, flexible mounting configurations, configurable I/O, and universal AC/DC power supply make it a valuable solution for many mission critical applications. Of course, Argon will customize the unit to meet your exact electrical and mechanical interfaces.

The ARD19 is a full-featured mil spec display with a wide variety of standard options, and Argon is prepared to customize the display to ensure that the product meets your exacting requirements.


Main Features:

- Extremely Small Bezel Dimensions
- Low Weight
- Customer Defined Bezel Buttons
- NVG Compatibility (Option)
- High Brightness (Option)
- Military Connectors
- Wide Range for Environmental/EMI
- Fully Enclosed Unit (IP66), Convection Cooling
- Rugged AR Touch Screen (Option)

Argon Corp has over 28 years of experience designing, producing and supporting a variety of rugged computing and display solutions that serve land based, naval and airborne applications. These solutions are also suitable for adjacent applications where extreme, combat like environments are present, such as oil and gas exploration, and mining activities.

Argon has developed a standing reputation for working with customers to design custom solutions and reliable products. Add to this extensive industry knowledge and Argon is a partner you can trust.

Feb 2020

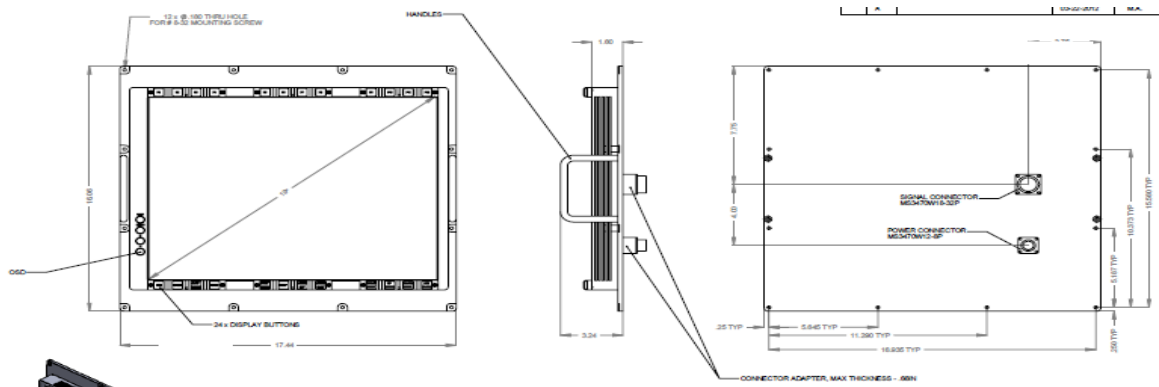

Technical Specifications for ARD19 (Typical)

Optical	
Viewable Area	19" Diagonal
Display Type	TFT LCD w/ LED Backlight
Resolution	1280x1024 (SXGA)
Contrast Ratio	>1400:1
Brightness	400 nits Typical, High Brightness Option up to 750+ nits
Touch Screen	Ruggedized, Analog Resistive
NVG	NVG Compatibility (Option)
Overall Unit	
Dimensions	17.44" x 16.06" x 1.00"
Weight	15 +-lbs
Power Input	18 to 36VDC or 110/220VAC 44Hz-440Hz Input
Power Consumption	40W Typical, without optional heating
I/O Options	Analog/DVI, RS-170, RS232, USB (For Optional Touch Screen or Bezel Buttons)
Connectors	MIL Circular, D Sub or Specify
Enclosure	Aluminum, Enclosure (No Openings)
User Controls	On/Off, OSD, Brightness, Bezel Buttons, Day/Night
Environmental	Meets, but not Limited to, the Following Sample Specifications
Operating Temp	-10°C to +55°C (-40°C Option), MIL-STD-810
Storage Temp	-55°C to +71°C, MIL-STD-810
Shock	Mil-S-901D and Others
Vibration	2.25 grms, MIL-STD-810
EMI/EMC	Designed to MIL-STD-461
Altitude	40k ft Operating/Non-Operating, MIL-STD-810
Salt Fog	Resistant to Salt Fog, Unit is 100% Enclosed
Humidity	Operational, 100% Condensing, MIL-STD-810



Metromatics

For further information or pricing, please contact us:

Melbourne 03 9872 4592 Sydney 02 9460 4355
Brisbane 07 3868 4255 Adelaide 08 8343 8516

sales@metromatics.com.au
www.metromatics.com.au

com

Feb 2020

Argon Corporation
1235 Old Alpharetta Rd, Suite 165, Alpharetta, GA 30005
Tel: (678) 608-4480
sales@argoncorp.com