


under 1mA current consumption of new version CANCrocodile A++

CANCrocodile is used in vehicle telematics and GPS tracking system for safe contactless data gathering from automotive buses T-CAN and M-CAN.

- ✓ CAN j1939 bus data reading with no damage to wire insulation.
- ✓ Protecting vehicle electronic systems against active requests from telematics unit.
- ✓ Saving warranty for a vehicle.

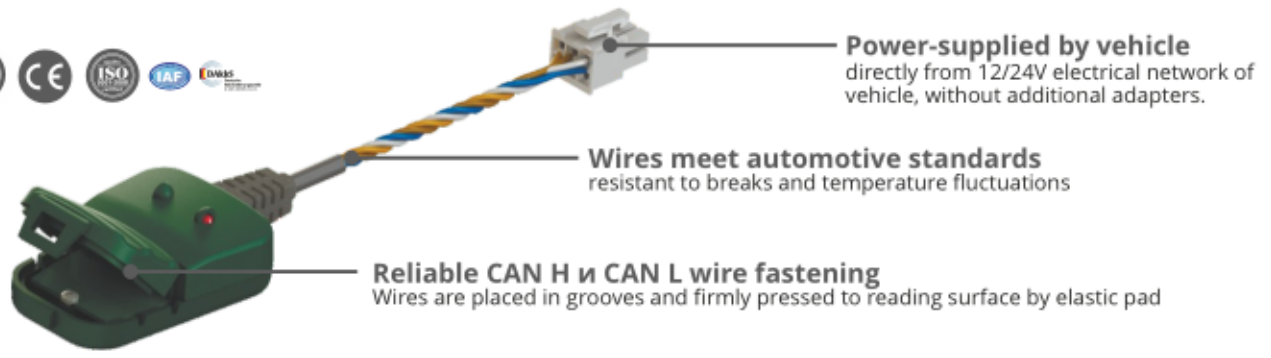

Easy installation - no special tools needed.

1. Open CANCrocodile case.
2. Put CAN H and CAN L wires along the marks on reading surface.
3. Close the case until click and connect CANCrocodile wires to telematics unit's CAN-port and electrical network of vehicle.



Models: CAN **U12/24 L0.7 CS**

U – power supply voltage:
12/24 – 12/24 V, basic version
12/24 A++ – 12/24 V, current consumption in sleep mode is 1/0,5 mA
5 – 5V

L – output cable length
0.7 – 0,7m, basic version
2 – 2,0 m

C – output cable ending:
S – connector, basic version
W – bare wires
C – crimped wires