


DYTRAN PROPRIETARY AND CONFIDENTIAL  
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF  
 DYTRAN INSTRUMENTS, INC. AND ANY REPRODUCTION IN PART OR AS A WHOLE  
 OR ANY OTHER DISSEMINATION OF THIS INFORMATION WITHOUT THE WRITTEN  
 PERMISSION OF DYTRAN INSTRUMENTS, INC. IS PROHIBITED.

REV	ECN	DESCRIPTION	BY/DATE	CHK	APPR
B	4625	IS: "MUST BE FLAT WITHIN" WAS: "MUST BE FLAT WITHIS"	R.LA. 5/3/07	CES	CES
C	11429	ADDED DIMENSION DIA .750	LA 11/05/14	JS	LN
D	13356	SEE ECN	RA 03/17/17	LA	LN

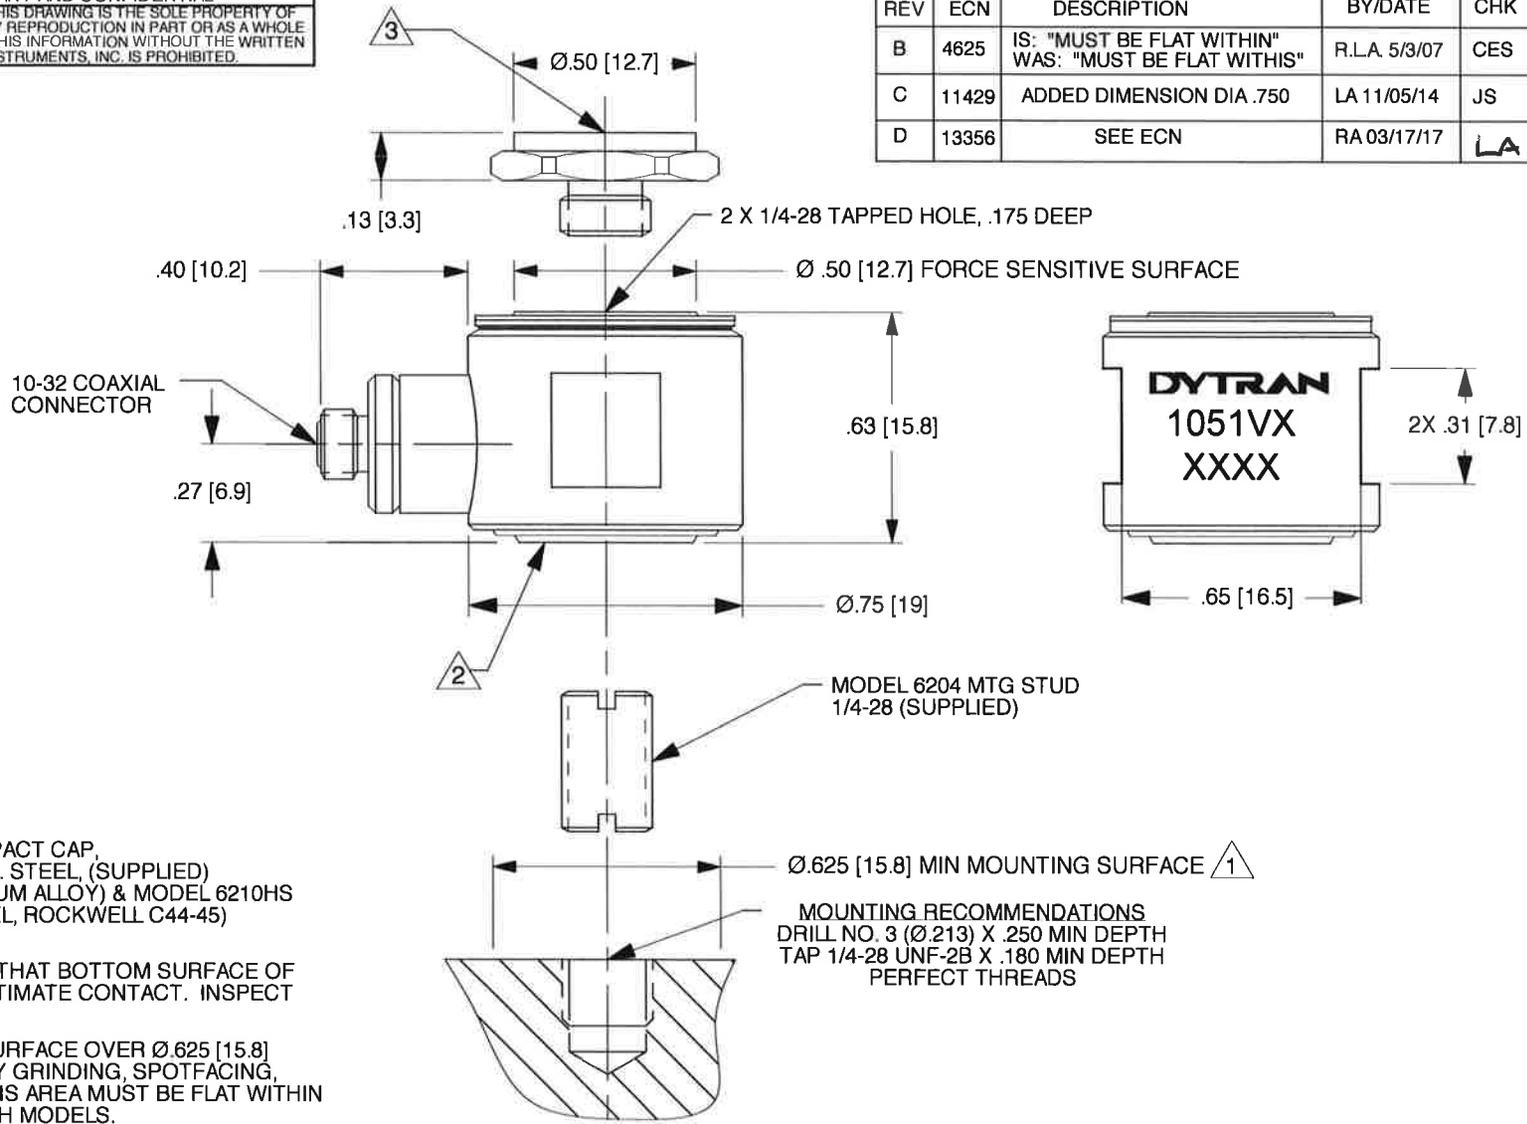

- 3 MODEL 6210S IMPACT CAP,  
MATERIAL: 303 ST. STEEL, (SUPPLIED)  
MODEL 6210A (ALUM ALLOY) & MODEL 6210HS  
(17-4 PH ST. STEEL, ROCKWELL C44-45)  
ALSO AVAILABLE
- 2 IT IS IMPORTANT THAT BOTTOM SURFACE OF  
SENSOR BE IN INTIMATE CONTACT. INSPECT  
FOR BURRS, ETC.
- 1 PREPARE FLAT SURFACE OVER  $\varnothing .625$  [15.8]  
MINIMUM AREA BY GRINDING, SPOTFACING,  
LAPPING ETC. THIS AREA MUST BE FLAT WITHIN  
.001 TIR, TYP BOTH MODELS.

MOUNTING RECOMMENDATIONS  
 DRILL NO. 3 ( $\varnothing .213$ ) X .250 MIN DEPTH  
 TAP 1/4-28 UNF-2B X .180 MIN DEPTH  
 PERFECT THREADS

NOTES: UNLESS OTHERWISE SPECIFIED

UNLESS OTHERWISE SPECIFIED: INTERPRET DIM & TOL PER ASME Y14.5M-1994. REMOVE BURRS COUNTERSINKS INTERNAL THDS 90° TO MAJOR DIA CHAM EXT THDS 45° TO MAJOR DIA THD LENGTHS AND DEPTHS ARE FOR THDS PER MIL-S- 7742. DIMENSIONS APPLY AFTER FINISHING.		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. DIMENSION IN BRACKETS [ ] ARE IN MILLIMETERS. TOLERANCES ARE: INCHES METRIC ANGLES .XX ± .03 .X ± 0.8 ± 1° .XXX ± .010 .XX ± 0.25		CONTRACT NO.	
USED ON	NEXT ASSY	MATERIAL		APPROVALS	
APPLICATION		FINISH		ORIG	N.C. 1/30/82
THIRD ANGLE PROJECTION USA		DO NOT SCALE DRAWING		CHK	N.C. 1/30/82
ALL MACHINED SURFACES TOTAL RUNOUT WITHIN .005 BREAK SHARP EDGES .005 TO .010 MACHINE FILLET RADI .005 TO .015 WELDING SYMBOLS PER AWS A2.4 ABBREVIATIONS PER MIL-STD-12				APP	LN. 11/19/14
				APP	

**DYTRAN MASTER**  
 INSTRUMENTS, INC. ONLY IF IN RED  
 CHATSWORTH, CA.

TITLE: **OUTLINE/INSTALLATION DRAWING,  
MODEL 1051V**

SIZE	CAGE CODE	DWG. NO.	REV
A	2W033	127-1051V	D
SCALE:	NONE	ASHLAR GRAPHITE	SHEET 1 OF 1

<b>Model Number</b> 1051V1	<b>PERFORMANCE SPECIFICATION</b>					<b>DOC NO</b> PS1051V1	
	<b>DYNAMIC FORCE SENSOR, IEPE</b>					REV D, ECN 16158, 04/19/21	



- COMPRESSIVE & TENSILE LOADINGS
- EXCELLENT LINEARITY
- IEPE, VOLTAGE MODE

**PHYSICAL**

Weight, Max.	1.0	oz	28	grams
Connector	10-32		10-32	
Material	Stainless Steel		Stainless Steel	
Sensing Element	Quartz		Quartz	
Material Mode	Compression		Compression	

**PERFORMANCE**

	ENGLISH		SI	
Sensitivity, ± 10 %	500	mV/lbf	112.4	mV/N
Compression Range	10	lbf	44.5	N
Maximum Compression	200	lbf	890	N
Tension Range	10	lbf	44.5	N
Maximum Tension [1]	200	lbf	890	N
Resolution	0.00014	lbf, RMS	0.00062	N
Linearity [2]	±1	% Full Scale	±1	% Full Scale
Resonant Frequency, Unloaded	>39	kHz	>39	kHz
Stiffness, Force Sensor	11.4	lbf/μin	2.0	kN/μm

**ENVIRONMENTAL**

Maximum Shock, Unloaded	10,000	g pk	98100	m/s <sup>2</sup> pk
Temperature Range	-100 to +250	°F	-73 to +121	°C
Thermal Coefficient	0.03	%/°F	0.05	%/°C
Seal	Epoxy		Epoxy	

**ELECTRICAL**

Output Voltage F.S	±5	V	±5	V
Output Impedance	<100	Ω	<100	Ω
Bias Voltage	7.5 to 9.5	VDC	7.5 to 9.5	VDC
Compliance Voltage Range	18 to 30	VDC	18 to 30	VDC
Supply Current Range [4]	2 to 20	mA	2 to 20	mA
Discharge Time Constant, Min	20	Sec	20	Sec

**This family also includes:**

Model	Sens. (mV/lbf)	Compression Range (lbf)	Max. Compression (lbf)	Tension Range (lbf)	Max. Tension (lbf)	T.C. (sec)	Resolution (lbf, RMS)
1051V2	100	50	1000	50	500	50	0.0007
1051V3	50	100	2000	100	500	100	0.0014
1051V4	10	500	10000	500	500	1000	0.007
1051V5	5	1,000	15000	500	500	1200	0.014
1051V6	1	5,000	15000	500	500	2000	0.07



Refer to the performance specifications of the products in this family for detailed description.

**Supplied Accessories:**

- 1) Accredited calibration certificate (ISO 17025)
- 2) MOD 6210 STEEL IMPACT CAP
- 3) MOD 6204 1/4-28 MOUNTING STUD

**Notes:**

- [1] Absolute maximum tension. Do not exceed in any case!
- [2] Measure using zero-based straight line method, % of F.S. or any lesser range.
- [3] All specifications are at room temperature unless otherwise specified.
- [4] Do not apply power to this system without current limiting, 20 mA MAX. To do so will destroy the IC charge amplifier.
- [5] In the interest of constant product improvement, we reserve the right to change specifications without notice. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts.

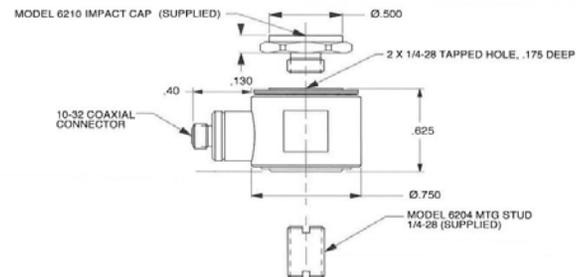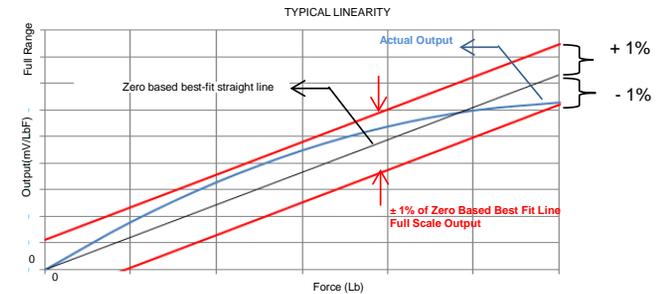

Units on the line drawing are in inches, units in brackets are in millimeters. Refer to 127-1051V for more information.



21592 Marilla Street, Chatsworth, California 91311 Phone: 818.700.7818 Fax: 818.698.0362 www.dytran.com  
For permission to reprint this content, please contact info@dytran.com