

4

3

DWG NO 127-3056DT SH 1 REV D

1



PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF DYTRAN INSTRUMENTS INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF DYTRAN INSTRUMENTS INC. IS PROHIBITED

MODEL	SENSITIVITY
3056D1T	10 mV/g
3056D2T	100 mV/g
3056D3T	500 mV/g
3056D4T	20 mV/g
3056D5T	50 mV/g
3056D6T	200 mV/g
3056D7T	1 mV/g
3056D8T	5 mV/g

REVISIONS

REV.	ECN	DESCRIPTION	BY/DATE	CHK	APPR
A	11394	INITIAL RELEASE	RA 11/06/14	EM	DV
B	11983	ADDED 3056D7T & D8T	LA 05/18/15	RT	DV
C	12426	ADDED VIEW A-A, REMOVED ISOMETRIC VIEW	RA, 01/06/16	EM	LN
D	14310	ZONE B3 10-32 UNF WAS: 1032 UNC	RA, 07/10/18	W	MH

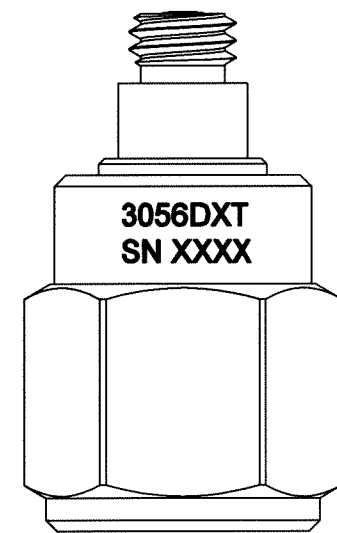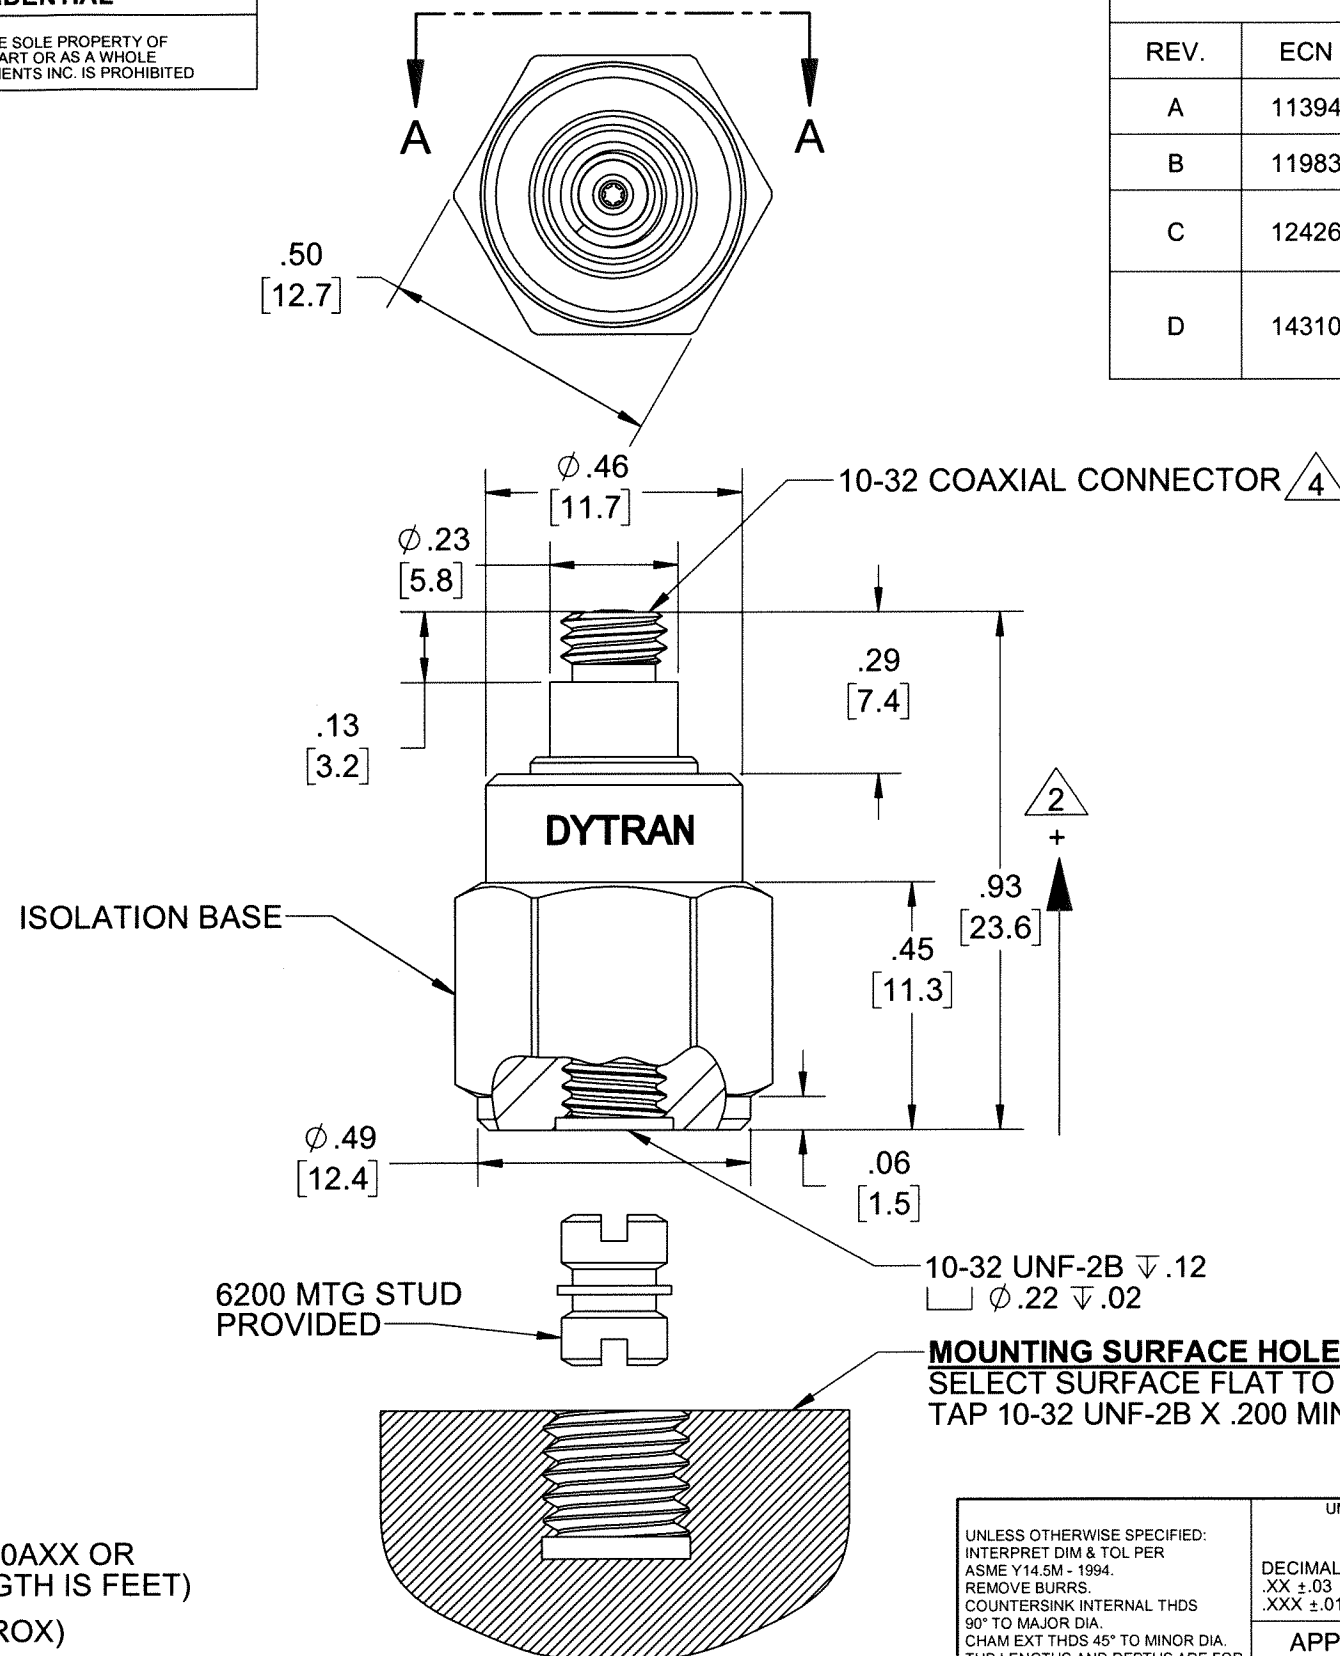

VIEW A-A
ROTATED 180°

4 MATES WITH DYTRAN 6010AXX OR 6011AXX CABLE (XX=LENGTH IS FEET)

3. WEIGHT: 10 GRAMS (APPROX)

2 ARROW INDICATES ACCELERATION DIRECTION FOR POSITIVE OUTPUT.

1. MATERIAL: TITANIUM ALLOY

NOTES: UNLESS OTHERWISE SPECIFIED

UNLESS OTHERWISE SPECIFIED:
INTERPRET DIM & TOL PER
ASME Y14.5M - 1994.
REMOVE BURRS.
COUNTERSINK INTERNAL THDS
90° TO MAJOR DIA.
CHAM EXT THDS 45° TO MINOR DIA.
THD LENGTHS AND DEPTHS ARE FOR
MIN FULL THDS.
DIMENSIONS APPLY AFTER FINISHING.

ALL MACHINED SURFACES. ⁶³
TOTAL RUNOUT WITHIN .005.
BREAK SHARP EDGES .005 TO .010.
MACHINED FILLET RADII .005 TO .015.
WELDING SYMBOLS PER AWS A2.4.
ABBREVIATIONS PER MIL-STD-12.

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES.
TOLERANCES ARE:

DECIMALS	METRIC	ANGLES
.XX ±.03	.X ± 0.8	±1°
.XXX ±.010	.XX ±0.25	

APPROVALS		DATE
ORIG	RA	10/29/14
CHK	EM	12/12/14
APP	DV	12/17/14

DO NOT SCALE DRAWING



Chatsworth, CA

MASTER
ONLY IF IN RED

TITLE:
**OUTLINE/INSTALLATION,
MODEL 3056DXT**

SIZE	CAGE CODE	DWG NO	REV
B	2W033	127-3056DT	D


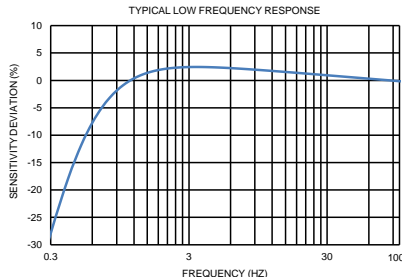
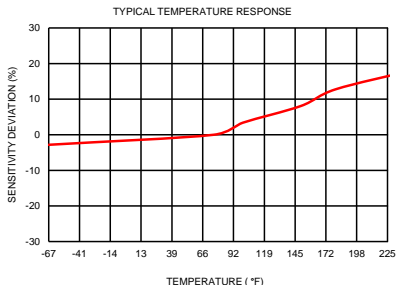
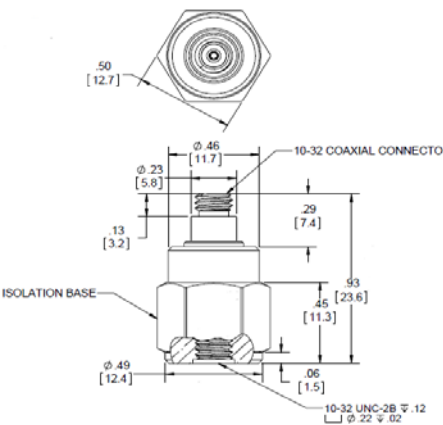
SCALE: 3:1 PART NO: SHEET 1 OF 1


4

3

2

1

Model Number 3056D1T		PERFORMANCE SPECIFICATIONS				DOC NO PS3056D1T																																									
		IEPE ACCELEROMETER				REV F, ECN 16090, 03/02/21																																									
		<ul style="list-style-type: none">• HERMETICALLY SEALED• BASE ISOLATED• TEDS				This family also includes:																																									
						<table><tr><th>Model</th><th>Sensitivity (mV/g)</th><th>Frequency Response (Hz)</th><th>Time Constant (Sec)</th><th>Operating Temp (°F)</th></tr><tr><td>3056D2T</td><td>100</td><td>1 to 10000</td><td>0.5 to 1.5</td><td>-60 to +250</td></tr><tr><td>3056D3T</td><td>500</td><td>1 to 10000</td><td>0.5 to 1.5</td><td>-60 to +225</td></tr><tr><td>3056D4T</td><td>20</td><td>1 to 10000</td><td>0.5 to 1.5</td><td>-60 to +250</td></tr><tr><td>3056D5T</td><td>50</td><td>1 to 10000</td><td>0.5 to 1.5</td><td>-60 to +250</td></tr><tr><td>3056D6T</td><td>200</td><td>1 to 10000</td><td>0.5 to 1.5</td><td>-60 to +225</td></tr><tr><td>3056D7T</td><td>1</td><td>1 to 10000</td><td>0.5 to 1.5</td><td>-60 to +250</td></tr><tr><td>3056D8T</td><td>5</td><td>1 to 10000</td><td>0.5 to 1.5</td><td>-60 to +250</td></tr></table>		Model	Sensitivity (mV/g)	Frequency Response (Hz)	Time Constant (Sec)	Operating Temp (°F)	3056D2T	100	1 to 10000	0.5 to 1.5	-60 to +250	3056D3T	500	1 to 10000	0.5 to 1.5	-60 to +225	3056D4T	20	1 to 10000	0.5 to 1.5	-60 to +250	3056D5T	50	1 to 10000	0.5 to 1.5	-60 to +250	3056D6T	200	1 to 10000	0.5 to 1.5	-60 to +225	3056D7T	1	1 to 10000	0.5 to 1.5	-60 to +250	3056D8T	5	1 to 10000	0.5 to 1.5	-60 to +250
Model	Sensitivity (mV/g)	Frequency Response (Hz)	Time Constant (Sec)	Operating Temp (°F)																																											
3056D2T	100	1 to 10000	0.5 to 1.5	-60 to +250																																											
3056D3T	500	1 to 10000	0.5 to 1.5	-60 to +225																																											
3056D4T	20	1 to 10000	0.5 to 1.5	-60 to +250																																											
3056D5T	50	1 to 10000	0.5 to 1.5	-60 to +250																																											
3056D6T	200	1 to 10000	0.5 to 1.5	-60 to +225																																											
3056D7T	1	1 to 10000	0.5 to 1.5	-60 to +250																																											
3056D8T	5	1 to 10000	0.5 to 1.5	-60 to +250																																											
		Refer to the performance specifications of the products in this family for detailed description																																													
		Supplied Accessories: 1) Accredited calibration certificate (ISO 17025) 2) Model 6200 mounting stud, QTY 1																																													
		Notes: [1] Measured at 100Hz, 1 g RMS per ISA RP 37.2. [2] Measured using zero-based straight line method, % of F.S. or any lesser range. [3] Do not apply power to this system without current limiting, 20 mA MAX. To do so will destroy the IC charge amplifier. [4] In the interest of constant product improvement, we reserve the right to change specifications without notice. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary overtime. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts.																																													
PHYSICAL		ENGLISH		SI																																											
Weight		0.35	oz	10	grams																																										
Connector	Type	10-32		10-32																																											
Mounting Provision	Tapped Hole	10-32 X .150 ↓		10-32 X .150 ↓																																											
Material, Housing/Connector		Titanium		Titanium																																											
Sensing Element		Ceramic		Ceramic																																											
Element Style		Planar Shear		Planar Shear																																											
PERFORMANCE																																															
Sensitivity, ±5% [1]		10	mV/G	1.0	mV/m/s ²																																										
Range for ± 5 Volts Output		500	g pk	4905	m/s ² pk																																										
Frequency Response, ±10%		1 to 10,000	Hz	1 to 10,000	Hz																																										
Resonant Frequency		> 36	kHz	> 36	kHz																																										
Broad Band Resolution		0.0040	g RMS	0.0392	m/s ² RMS																																										
Linearity [2]		±1	% F.S.	±1	% F.S.																																										
Maximum Transverse Sensitivity		5	%	5	%																																										
Strain Sensitivity @ 250µε		0.001	G/µε	0.01	m/s ² /µε																																										
ENVIRONMENTAL																																															
Maximum Shock		3000	g pk	29430	m/s ² pk																																										
Operating Temperature Range		-67 to +225	°F	-55 to +107	°C																																										
TEDS Operating Temperature		-40 to +185	°F	-40 to +85	°C																																										
Seal		HERMETIC		HERMETIC																																											
ELECTRICAL																																															
Supply Current Range [3]		2 to 20	mA	2 to 20	mA																																										
Compliance Voltage Range		+18 to +30	Volts	+18 to +30	Volts																																										
Output Impedence,Typ		100	Ω	100	Ω																																										
Bias Voltage		+9 to +13	VDC	+9 to +13	VDC																																										
Discharge Time Constant		.5 to 1.5	Sec	.5 to 1.5	Sec																																										
Electrical Isolation		10	GΩ,min	10	GΩ,min																																										
TEDS		IEEE 1451.4		IEEE 1451.4																																											
																																															
																																															
																																															
		Units on the line drawing are in inches, units in brackets are in millimeters. Refer to 127-3056DT for more information.																																													



21592 Marilla Street, Chatsworth, California 91311 Phone: 818.700.7818 Fax:818.698.0362 www.dytran.com
For permission to reprint this content, please contact info@dytran.com

