


PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF DYTRAN INSTRUMENTS INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF DYTRAN INSTRUMENTS INC. IS PROHIBITED

REVISIONS

REV	ECN	DESCRIPTION	BY/DATE	CHK	APPR
B	15856	REPLACED OBSOLETE POWER SUPPLY	AM 07/21/20	KG	RA

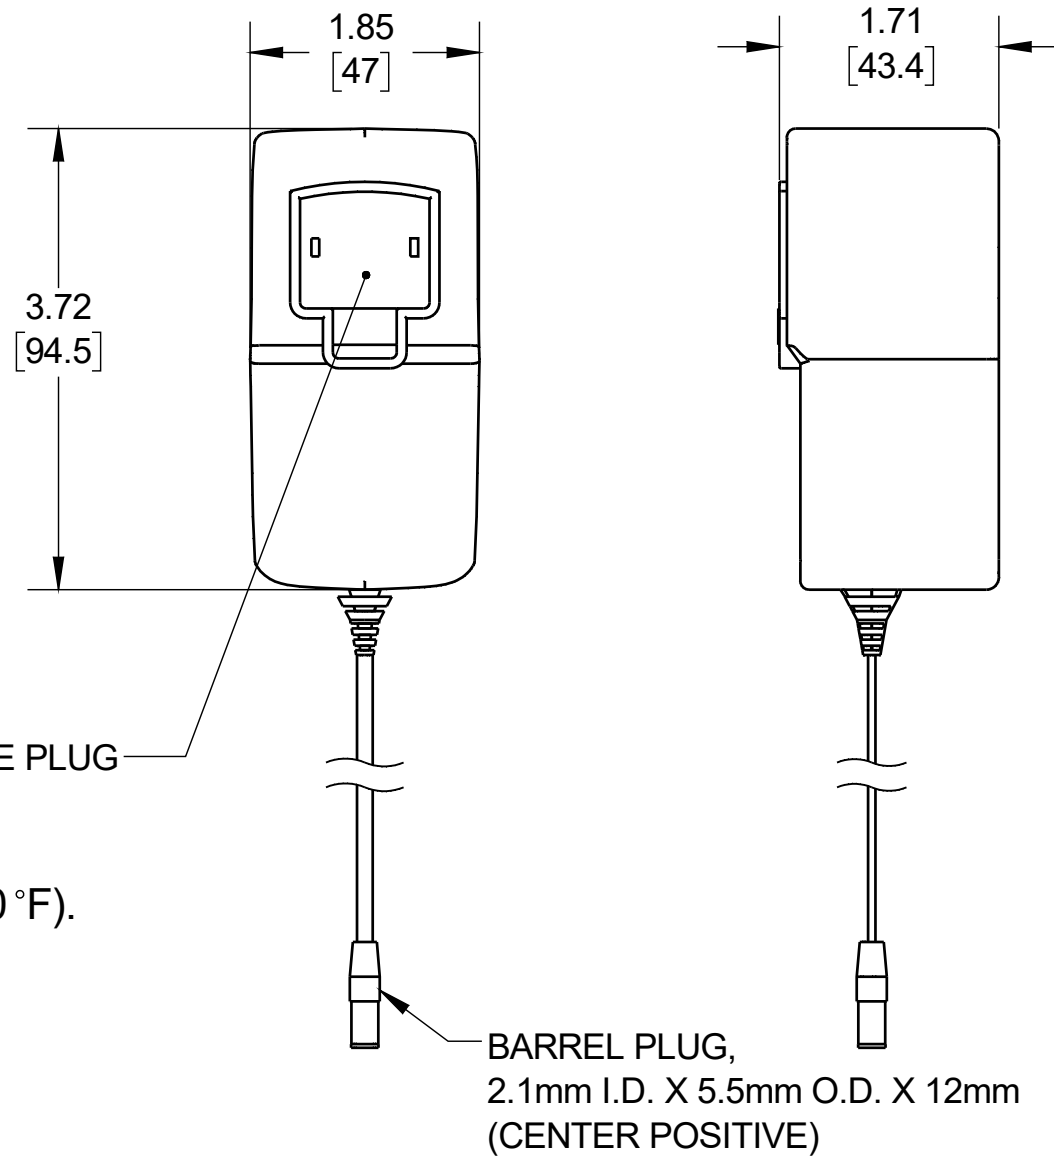

- 6. CORD LENGTH: 59" (1.5m)
- 5. OPERATING TEMPERATURE: 0 °C (+32 °F) to 60 °C (+140 °F).
- 4. NO LOAD POWER CONSUMPTION: 75mW MAX.
- 3. CURRENT OUTPUT: 2A MAX.
- 2. OUTPUT VOLTAGE: 18 VDC
- 1. INPUT VOLTAGE: 90-264 VAC

USED ON	NEXT ASSY
APPLICATION	
THIRD ANGLE PROJECTION USA	

UNLESS OTHERWISE SPECIFIED:
 INTERPRET DIM & TOL PER ASME Y14.5M - 1994.
 REMOVE BURRS.
 COUNTERSINK INTERNAL THDS 90° TO MAJOR DIA.
 CHAM EXT THDS 45° TO MINOR DIA.
 THD LENGTHS AND DEPTHS ARE FOR MIN FULL THDS.
 THDS PER MIL-S-7742.
 DIMENSIONS APPLY AFTER FINISHING.

ALL MACHINED SURFACES. ⁶³✓
 TOTAL RUNOUT WITHIN .005.
 BREAK SHARP EDGES .005 TO .010.
 MACHINED FILLET RADII .005 TO .015.
 WELDING SYMBOLS PER AWS A2.4.
 ABBREVIATIONS PER MIL-STD-12.

UNLESS OTHERWISE SPECIFIED:
 DIMENSIONS ARE IN INCHES.
 DIMENSIONS IN BRACKETS [] ARE IN MILLIMETERS
 TOLERANCES ARE:
 INCHES METRIC ANGLES
 .XX ± .03 .X ± 0.8 ± 1°
 .XXX ± .010 .XX ± 0.25

MATERIAL

FINISH

DO NOT SCALE DRAWING

CONTRACT NO.		
APPROVALS		DATE
ORIG	LN	01/24/17
CHK	KG	10/04/18
APP	LN	10/01/18
APP		

DYTRAN INSTRUMENTS, INC. Chatsworth, CA

TITLE: **OUTLINE/INSTALLATION DWG, POWER SUPPLY, AC/DC ADAPTER, 18VDC, 36W, MODEL 69004**

SIZE	CAGE CODE	DWG. NO.	REV
A	2W033	127-69004	B

SCALE: 1:2 SOLIDWORKS SHEET 1 OF 1