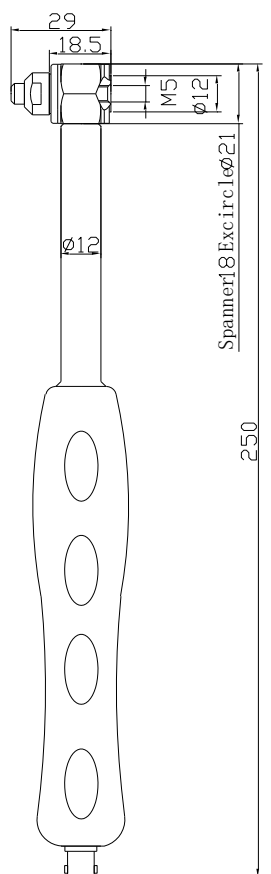



<p>Product Model: MIH Series MIH-01</p> 	<table border="1"> <thead> <tr> <th colspan="2">Impact Hammer</th> </tr> <tr> <th>Model</th> <th>MIH-01</th> </tr> </thead> <tbody> <tr> <td>Sensitivity</td> <td>25 mV/N</td> </tr> <tr> <td>Measurement Range</td> <td>±200 N Pk</td> </tr> <tr> <td>Resolution</td> <td>6 mN rms</td> </tr> <tr> <td>Min. Frequency</td> <td>1 Hz</td> </tr> <tr> <td>Resonant Frequency</td> <td>~ 60 kHz</td> </tr> <tr> <td>Non Linearity</td> <td>≤5%</td> </tr> <tr> <td>Temperature Range</td> <td>-54 to +70°C</td> </tr> <tr> <td>Excitation Voltage</td> <td>+18 to ±28 VDC</td> </tr> <tr> <td>Excitation Current</td> <td>2-10 mA</td> </tr> <tr> <td>Output Impedance</td> <td><100 Ω</td> </tr> <tr> <td>Output Bias Voltage</td> <td>11 ±1.5 VDC</td> </tr> <tr> <td>Sensing Element</td> <td>Quartz</td> </tr> <tr> <td>Size mm</td> <td>As figure on left</td> </tr> <tr> <td>Head Diametre</td> <td>Φ18</td> </tr> <tr> <td>Head Weight</td> <td>~ 28 grams</td> </tr> <tr> <td>Hammer Length</td> <td>250 mm</td> </tr> <tr> <td>Output Connector</td> <td>BNC</td> </tr> <tr> <td>Housing Material</td> <td>Stainless Steel</td> </tr> </tbody> </table>	Impact Hammer		Model	MIH-01	Sensitivity	25 mV/N	Measurement Range	±200 N Pk	Resolution	6 mN rms	Min. Frequency	1 Hz	Resonant Frequency	~ 60 kHz	Non Linearity	≤5%	Temperature Range	-54 to +70°C	Excitation Voltage	+18 to ±28 VDC	Excitation Current	2-10 mA	Output Impedance	<100 Ω	Output Bias Voltage	11 ±1.5 VDC	Sensing Element	Quartz	Size mm	As figure on left	Head Diametre	Φ18	Head Weight	~ 28 grams	Hammer Length	250 mm	Output Connector	BNC	Housing Material	Stainless Steel	<p>MIH series IMPACT HAMMER is designed to excite and measure impact forces on small to medium structures. Such as engine blocks, car frames and automotive components. It features built-in electronics, and the output sensitivity is expressed in terms of voltage per unit force (mV/N).</p> <p>A dynamic force sensor is used to measure the response of the structure. By using an analysing system, the frequency response function and mode shapes of the test structure can then be derived. Compared to using an electrodynamic exciter, an impact hammer does not apply additional mass loading to the test object.</p> <p>Therefore, providing a very portable and accurate solution for excitation.</p> <p>Uses:</p> <ul style="list-style-type: none"> • Impact-force measurements on small to medium structures • Measurement of frequency response functions using impact excitation techniques • As part of a dynamic structural testing system for modal analysis and the prediction of structural response <p>Features:</p> <ul style="list-style-type: none"> • Ergonomic handle • Negligible changes to dynamic properties of test structure • Four replaceable tips
Impact Hammer																																										
Model	MIH-01																																									
Sensitivity	25 mV/N																																									
Measurement Range	±200 N Pk																																									
Resolution	6 mN rms																																									
Min. Frequency	1 Hz																																									
Resonant Frequency	~ 60 kHz																																									
Non Linearity	≤5%																																									
Temperature Range	-54 to +70°C																																									
Excitation Voltage	+18 to ±28 VDC																																									
Excitation Current	2-10 mA																																									
Output Impedance	<100 Ω																																									
Output Bias Voltage	11 ±1.5 VDC																																									
Sensing Element	Quartz																																									
Size mm	As figure on left																																									
Head Diametre	Φ18																																									
Head Weight	~ 28 grams																																									
Hammer Length	250 mm																																									
Output Connector	BNC																																									
Housing Material	Stainless Steel																																									
<p>1. Accessories: Coaxial Shielded Cable 2 Metres x 1; Certificate of Inspection x 1; Replaceable Tips 1 set – Stainless Steel, Aluminium, Rubber, Nylon</p>	<p>25 Flinders Parade, North Lakes QLD 4509, AUSTRALIA www.metromatics.com.au sales@metromatics.com.au Brisbane: +61 7 3868 4255 Sydney: +61 2 9460 4355 Melbourne: +61 3 9872 4592 Adelaide: +61 8 8343 8516</p>																																									
<p>2. Comments</p>	<div style="display: flex; align-items: center;">  <div> <p style="font-size: 24px; font-weight: bold; margin: 0;">Metromatics</p> <p style="font-size: 12px; margin: 0;">ABN: 47 007 346 287</p> </div> </div>																																									