

PoE•X Water Detect Plus Sensor



General Description


The [Power-over-Ethernet \(PoE\) Water Detect Plus Sensor](#) detects either the presence or absence of water with a 3ft leaded wire. For example: a leak-prone pipe within a facility. You may need to know when the pipe begins leaking so it can be quickly repaired. This flexibility makes Monnit's Water Detect Sensor the best way to monitor water presence in your environment. The sensor will remotely assess and regularly report on activity, instantly notifying you the moment change is detected.

Monnit PoE•X Sensor Features

- Power-over-Ethernet ready (injector hardware required)
- Embedded LEDs for transmission & online condition indicators
- 50,000 sensor message memory (non-volatile)
- Modbus TCP & SNTP v1 interface capabilities
- No PC required (managed through apps and smart devices)
- Remote update capable w/automatic updates
- [Optional 5V DC power supply available](#)

Technical / Device Specifications

DEVICE SPECIFICATIONS	
Part Number	MNS-P-C1-OC-ST
Communication Hardware	10 / 100 Ethernet Controller
PoE Requirements	Class 1 Device (500mW)
IEEE Standard Compliance	802.3AF-2003 / 802.3AT-2009 Class 1
Operation	Full- and Half-Duplex
Cross-Over Correction	Automatic MDI / MDI-X
Protocols Supported	DHCP, DNS, NTP, UDP, TCP, SNMP, Modbus TCP
Input Power	Supplementary Power Requirement
Cable Connector	RJ45
Supplementary Power Connector	2.1 x 5.5 mm barrel jack, center positive
Device Memory	Up to 50,000 sensor messages; varies based on sensor type. (Sensor messages will be stored in the event of Internet outage and transferred when connection is restored.)
Forced Communication / Reset Hardware	Button
Operating Temperature	-20 to +60°C (-4 to 140°F)
Storage Temperature	-40 to +85°C (-40 to 185°F)
SENSOR SPECIFICATIONS	
Lead Wire Length	3 ft. (36 in.)
Detection Wires	High Impedance
Weight	5.65 oz. (160 g)

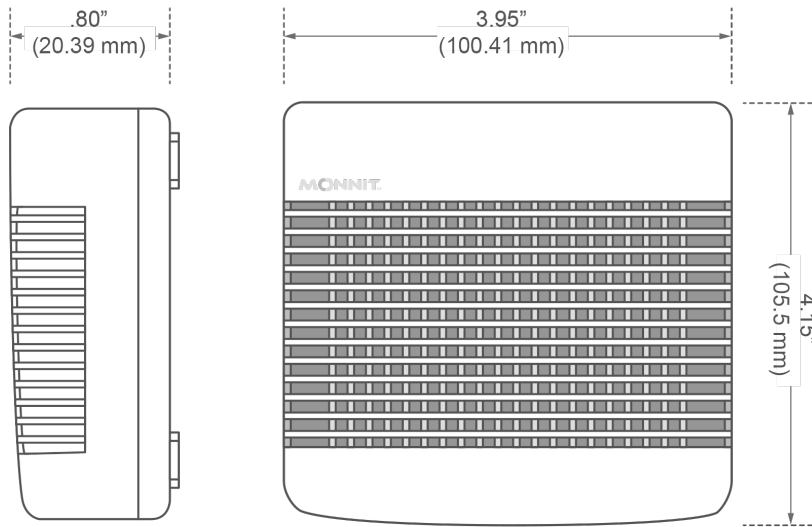

Example Applications

- Water heater monitoring
- Pumping leak detection
- Sump monitoring
- And many more

Notes

Software Compatibility

Currently Monnit PoE•X Sensors are only supported in iMonnit Online.

For more information about our products or to place an order, please contact our sales department at 801-561-5555. Visit us on the web at www.monnit.com.



Monnit Corporation
3400 South West Temple • Salt Lake City, UT 84115 • 801-561-5555
www.monnit.com

Change Log

Revision	Author	Date (yyyy/mm/dd)	Change
1	K Detro	2020/06/20	Original release.
2	K Detro	2021/08/30	Removed entry about Enterprise compatibility.