

XMC-A2000E-FGX-IO

NVIDIA RTX A2000E with SDI and Analog I/O

PRELIMINARY INFORMATION

KEY FEATURES

- NVIDIA RTX™ GA107, 2560 CUDA cores, 80 Tensor cores, 20 RT cores, peak performance 8.25 TFLOPS*
- Up to 4x 3G/HD/SD-SDI inputs and outputs
- Up to 2x CVBS/RGB/STANAG3350 + audio inputs
- Up to 2x DP/HDMI/DVI outputs
- Configurable operating power, 25W to 90W
 - * Peak performance requires the highest power configuration mode

ADDITIONAL FEATURES

- DisplayPort 1.4 digital video outputs
 - support for High Dynamic Range (HDR) video
 - 4K at 120Hz/5K at 60Hz, with 10-bit color depth
- Flexible WOLF IP – other display interfaces available upon request, such as ARINC-818 and CoaxPress
- WOLF FGX supports NVIDIA GPUDirect, providing an efficient CPU offload
- Ampere GPGPU parallel processing support:
 - CUDA Toolkit 11, CUDA Compute capability 8.6
 - OpenCL™ 3.0, DirectX® 12 Ultimate, OpenGL 4.6, OpenGL ES 3.2, Vulkan™ 1.2
- 80 Tensor Cores (3rd Gen), 34/66 TOPS
- 20 Ray Tracing cores (2nd Gen)
- NVENC (7th Gen) and NVDEC (5th Gen) with up to 8K video encoding and hardware decoding support
- 8 GB GDDR6 memory, 128 Bit, 192 GB/s max
- Linux and Windows drivers available

MECHANICAL/ARCHITECTURE

- High level of ruggedization:
 - Rugged conduction cooled or air cooled
 - Operating temperature: conduction cooled -40° to +85°C, air cooled -40° to +71°C
 - Vibration (sine wave): 10G peak, 5 - 2000Hz
 - Shock: 40G peak for conduction cooled, 30G peak for air cooled
- Dimensions: TBD
- Weight (approximately): TBD
- VITA 46.9 I/O mapping for VPX rear I/O

OVERVIEW

This versatile module includes both an advanced NVIDIA Ampere architecture GPU and WOLF's Frame Grabber eXtreme (FGX). This board accepts multiple simultaneous inputs, including 3G-SDI, CVBS, RGsB, STANAG 3350 and stereo audio. The captured inputs can be routed to the high-performance NVIDIA RTX™ A2000 for processing and be output in several formats, including SDI, DisplayPort, HDMI, and others on request.

The NVIDIA Ampere architecture has introduced many significant improvements to the performance and efficiency of the GPU, with more flexible CUDA FP32/INT core use, more efficient third generation Tensor cores, and second generation RT cores. The Ampere GPU fabrication uses an 8nm manufacturing processing providing significant power improvements which, along with other Ampere architecture improvements, can provide up to 144 GFLOPS/W, providing almost three times the performance per slot compared to the Pascal generation's 51 GFLOPS/W.


The WOLF Frame Grabber eXtreme (FGX) provides the board with data conversion from one standard to another, with a wide array of video input and output options for both cutting-edge digital I/O and legacy analog I/O. The FGX supports NVIDIA GPUDirect which allows direct access to the GPU memory for processing and analysis.

WOLF's advanced cooling technology is designed to move heat using a low weight, high efficiency path to move heat away from the GPU.



This is preliminary and subject to change.

PRELIMINARY INFORMATION

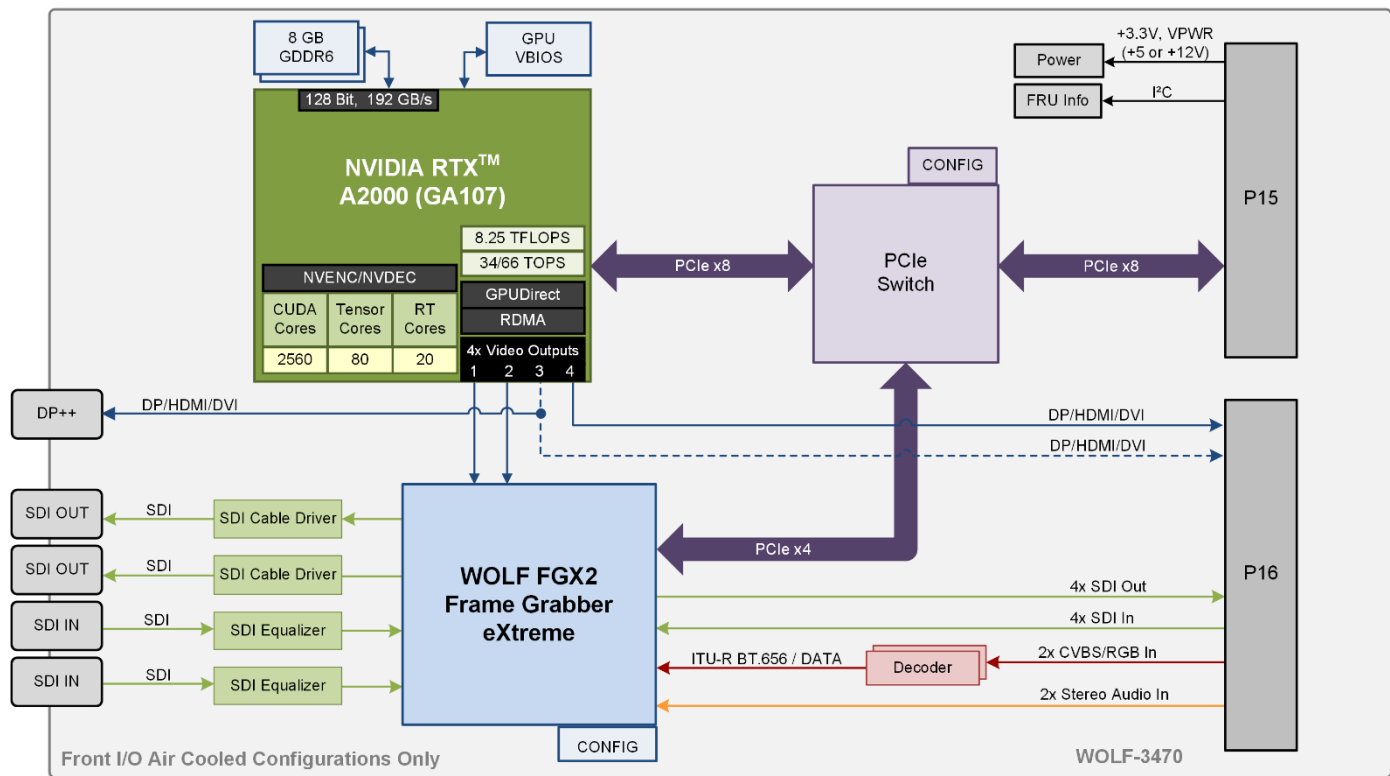

NVIDIA AMPERE STREAMING MULTIPROCESSOR (SM)

Each NVIDIA Ampere streaming multiprocessor (SM) partition contains CUDA cores for FP and INT operations, Tensor cores for AI, Ray Tracing (RT) cores for rendering, Texture Units, a register file, and L1/Shared Memory. Previous generation SM partitions limited one of the two available data paths to integer operations. With the Ampere SM both data paths can be used to process FP32 operations, providing double the number of available CUDA cores per SM for FP32. This change along with many other improvements to the other components in the Streaming Multiprocessor allows Ampere GPUs to provide significant performance per watt improvements.

NVIDIA TENSOR CORES FOR ARTIFICIAL INTELLIGENCE AND HPC

Tensor Cores are designed to speed up the tensor / matrix computations used for deep learning neural network training and inferencing operations. Ampere GPUs include the third-generation Tensor Core design which supports many new data types for improved performance, efficiency, and programming flexibility, including a new sparsity feature and a new Tensor Float 32 (TF32) precision mode.

NVIDIA provides CUDA-X AI and CUDA-X HPC libraries which have been designed to work with NVIDIA Tensor Core GPUs to provide the tools needed to accelerate development of applications for AI and HPC.

HARDWARE ACCELERATED VIDEO ENCODE / DECODE

The NVIDIA Ampere architecture GPU includes the NVENC video encode (version 7.2) and NVENC decode (version 5) hardware acceleration engine. Using the Ampere GPU for video encoding provides an efficient, high quality method to achieve real time 8K and 4K encoding without burdening the system CPU. The version 5 decoding engine includes support for several popular codecs and is the first GPU to include AV1 hardware decoding support. The NVIDIA Video Codec SDK provides a complete set of APIs, samples and documentation for hardware accelerated video encode and decode.

PRELIMINARY INFORMATION

ORDERING CODES

The following table defines series of common order codes for the XMC-A2000E-FGX-IO module. The asterisks denote characters of the part number that are defined based on common configuration options. Some common configuration options for this module are:

- Display Interfaces
- XMC 1.0 or 2.0 or other (ANSI/VITA 88)
- Conformal Coatings
- Air or Conduction Cooled

Ordering Number	Description
XMC-A2000E-FGX-IO Configurations	
347022-F***_***vA0	XMC 2.0 (PCIe Gen3 support), Air Cooled, Ampere A2000, WOLF FGX; Front: 2x SDI In/Out, 1x DP Out; Rear: 4x SDI In/Out, 2x CVBS In, 2x Stereo Audio In, 1x DP/HDMI/DVI Out
347032-F***_***vA0	XMC 2.0 (PCIe Gen3 support), Conduction Cooled, Ampere A2000, WOLF FGX, Rear: 4x SDI In/Out, 2x CVBS In, 2x Stereo Audio In, 2x DP/HDMI/DVI Out
347021-F***_***vA0	XMC 1.0 (PCIe Gen2 support), Air Cooled, Ampere A2000, WOLF FGX; Front: 2x SDI In/Out, 1x DP Out; Rear: 4x SDI In/Out, 2x CVBS In, 2x Stereo Audio In, 1x DP/HDMI/DVI Out
347031-F***_***vA0	XMC 1.0 (PCIe Gen2 support), Conduction Cooled, Ampere A2000, WOLF FGX, Rear: 4x SDI In/Out, 2x CVBS In, 2x Stereo Audio In, 2x DP/HDMI/DVI Out

* Contact WOLF to determine the appropriate configuration for your system.

MANUFACTURING AND QUALITY ASSURANCE

WOLF designs modules to pass the following environmental standards:

- MIL-STD-810 (United States Military Standard for Environmental Engineering Considerations and Laboratory Tests)
- MIL-HDBK-217 (Reliability Prediction of Electronic Equipment)
- RTCA DO-160 (Environmental Conditions and Test Procedures for Airborne Equipment) on request

WOLF complies with the following management systems:

- AS9100D: Quality Management System - Requirements for Aviation, Space and Defense Organizations (certified)
- ISO 9001:2015: Quality management systems (certified)
- AS5553: Counterfeit Electronic Parts; Avoidance, Detection, Mitigation, and Disposition (compliant)
- NIST SP 800-171: Protecting Controlled Unclassified Information in Nonfederal Systems (compliant)

Boards are manufactured to meet the following standards:

- IPC-A-610 CLASS 3 (Acceptability of Electronic Assemblies)
- IPC 6012 CLASS 3 (Qualification and Performance Specification for Rigid Printed Boards, Class 3 for High Reliability Electronic Products)
- IPC J-STD-001 (Requirements for Soldered Electrical and Electronic Assemblies)



This is preliminary and subject to change.

Datasheet Rev.10