


Date	Revision History

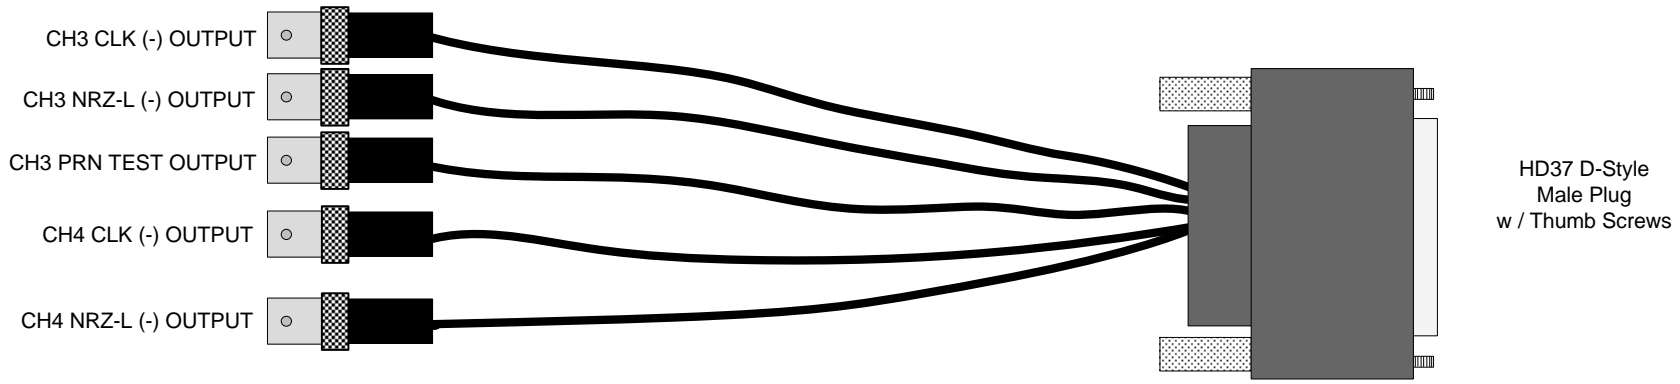

D-Style Connector Pin/ Contact No.	Label Text/Color	Pigtail Type	Signal Details
7	CH3 CLK (-) OUTPUT	BNC-F	CH3 BIT SYNC CLOCK OUTPUT (-)
6	CH3 NRZ-L (-) OUTPUT	BNC-F	CH3 BIT SYNC NRZ-L OUTPUT (-)
5	CH3 PRN TEST OUTPUT	BNC-F	CH3 PRN TEST OUTPUT
17	CH4 CLK (-) OUTPUT	BNC-F	CH4 BIT SYNC CLOCK OUTPUT (-)
16	CH4 NRZ-L (-) OUTPUT	BNC-F	CH4 BIT SYNC NRZ-L OUTPUT (-)
20-37	(N/A)	(N/A)	Ground

**Assembly Notes:**

- 1.) Apply signal labels near connector end of cable pigtails and secure with clear heat shrink.
- 2.) All signal cable pigtails to be constructed from RG-174, approximately 12" in length.
- 3.) Apply "LS-44 AUX I/O B" label to one side of D-connector housing and "C440101B" to the other side.

Lumistar Inc. 2701 Loker Ave West, Suite 230 Carlsbad, CA 92008 (760) 431-2181		
Title: <b>LS-44-QBS Differential Interface Cable Assembly Drawing</b>		
Size A	Document Number: C440101B	REV -
12/07/07		Sheet 1 of 1