


LUMISTAR

LS-08-PL L-Band Panel Antenna with 11 dBi Gain Data Sheet

Description:

The Lumistar LS-08-PL L-Band Panel Antenna is the ideal companion to the LS-25 Series



Receiver to provide a low cost receiving system with extremely high performance. This medium size, lightweight antenna is available in either Horizontal or Vertical polarization. It can be mounted to a pole, or purchased with the optional tripod.

This medium gain antenna consists of a broadband dipole enclosed in an aluminum cavity with a UV stabilized ASA radome for superior weatherability. The antenna is at DC ground to aid in lightning protection.

Key Features:

- 1425 to 1540 MHz
- 11 dBi Gain
- Medium size, light weight
- Inexpensive
- Available in Vertical, or Horizontal Polarization
- Horizontal Beamwidth = 48 degrees; Vertical Beamwidth = 52 degrees

Applicable Models:

LS-08-PLH L-Band Panel Antenna - Horizontally Polarized
LS-08-PLV L-Band Panel Antenna - Vertically Polarized

SPECIFICATIONS:

Performance:

Frequency Range	1425 MHz to 1540 MHz
Impedance/VSWR	50 Ohm/1.5:1
Gain	11 dBi
Beam-width horizontal	48°
Beam-width vertical	52°
Front to back ratio	25 dB min.

Lumistar, Inc.

3186 Lionshead Ave Ste 100

Carlsbad, CA 92010

PHONE: 760-431-2181 FAX: 760-431-2665 EMAIL: sales@lumistar.net

www.lumi-star.com

Specifications are subject to change. Please verify the latest specifications at time of order.

5/6/2020


LS-08-PL L-Band Panel Antenna with 11dBi Gain Data Sheet

Physical and Environmental:


Dimensions (L x W x H)	14 in x 12 in x 4 in (356 mm x 305 mm x 102 mm)
Weight	5 lbs (2.3 kg)
Housing material	ASA and Aluminum
Radome material	UV Stabilized ASA
Radome color	Grey
Rated Wind Velocity	125 mph (200 km/h)
Connector	N female

Typical Radiation Patterns:

Amplitude [dB]
Angle [deg]

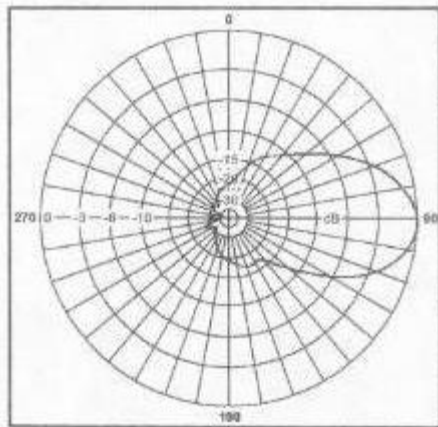

Vertical

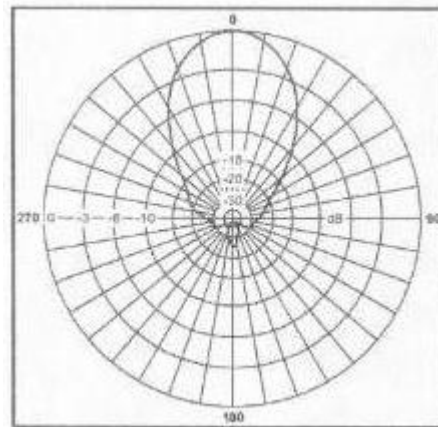

Horizontal

Lumistar Companion Products:

LS-25 Series	Telemetry Receiver and Down Converter
LS-11 Series	Test Transmitter
LS-18 Series	Telemetry Simulators