


Product Model: **MM161A Series**

Miniature Single Axis IEPE Accelerometer


Version: A Date: 17/3/2022

Sensor Features:

- Ceramic material with wide temperature coefficient
- Stable output in high and low temperature





- Adhesive:



- M5 (Male)

Model	MM161A-50
Sensitivity ($\pm 10\%$)	50 mV/g
Measurement Range	± 100 g
Frequency Range (± 1 dB)	1-10,000 Hz
Resolution	2 mg rms
Resonant Frequency	~ 40 kHz
Transverse Sensitivity + Non Linearity	$\leq 5\%$ / $\leq 1\%$
Temperature Range	-40 \sim +121 $^{\circ}\text{C}$
Excitation Voltage	+18 \sim +28 VDC
Excitation Current	2 to +10mA
Sensing Element	Ceramic/Shear
Output Impedance	$< 100 \Omega$
Output Bias Voltage	11 ± 1.5 VDC
Housing Material	Stainless Steel
Size mm	As left figure
Weight	~ 7.5 g
Output Connector	M5 Top
Mounting	M5 (Female), M5 (Male) or Adhesive

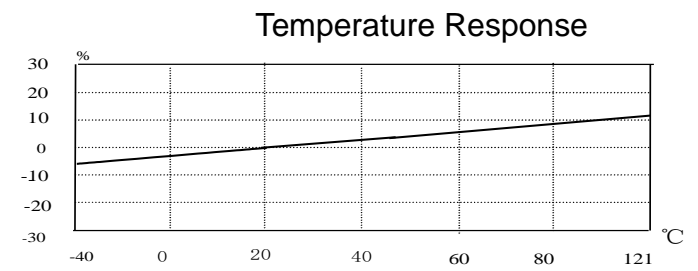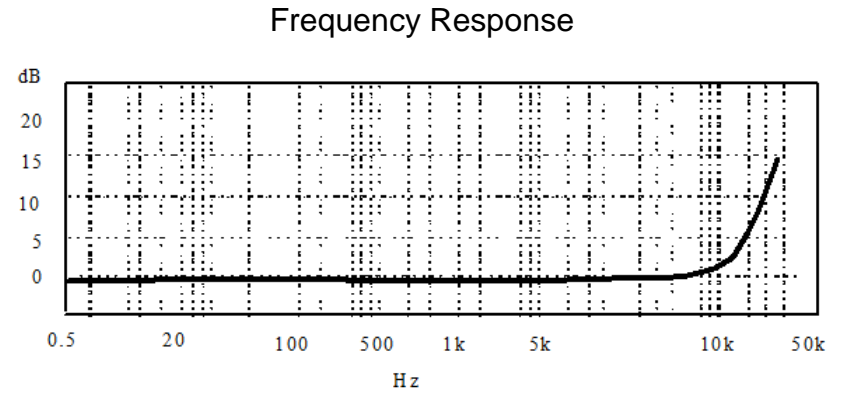

Accessories

• Certificate of inspection 1ea + 2M Coaxial shielded cable 1ea + M5 stud 1 ea M5 (Female) Mounting Type

Remark



Metromatics

ABN: 47 007 346 287

25 Flinders Parade, North Lakes QLD 4509, AUSTRALIA
www.metromatics.com.au sales@metromatics.com.au
 Brisbane: +61 7 3868 4255 I Sydney: +61 2 9460 4355
 Melbourne: +61 3 9872 4592 I Adelaide: +61 8 8343 8516