



Fanless Atom mini-PC for industrial and IoT applications




Features

- IOT gateway / Fanless industrial PC
- Intel® Elkhart Lake x6000E Atom processor
- NVMe + SATA storage
- 2x/4x Gigabit LAN
- Optional Wi-Fi/BT + LTE/5G modem
- Optional Isolated serial + GPIO ports
- 7V – 42V DC power input

Specifications

CPU	Intel® Atom x6425E	4 Core Base: 2.0 GHz, Boost: 3.0 GHz TDP: 12 W
	Intel® Celeron J6412	4 Core Base: 2.0 GHz, Boost: 2.6 GHz TDP: 10 W
	Intel® Atom x6211E	2 Core Base: 1.3 GHz, Boost: 3.0 GHz TDP: 6 W
Memory	Type	SO-DIMM DDR4 up to 3200MT/s
	Max. capacity	32 GB
Storage	M.2 Key-M	PCIe x4 / SATA for M.2 NVMe or SATA, size up to 2280
	M.2 Key-B	SATA for M.2 SATA, size up to 2260 (mutual with LTE/5G modem)
	2.5" HDD/SSD	Optional M.2 to SATA expansion for 2.5" HDD / SSD
Display	HDMI	HDMI 1.4b (up to 3840 x 2160 @ 30Hz)
	Mini-Display Port	DP 1.2 (up to 4096 x 2160 @ 60Hz) Dual mode
Ethernet	Type	2x Gigabit Ethernet on RJ45
	Controllers	Internal MAC with discreet PHY
	Speed	1 Gbps / 100 Mbps / 10 Mbps
	Optional FC3-LAN	Additional 2x GbE LAN on RJ45
	Optional FC3-OPLN	Additional 1x GbE LAN on SFP+ for optical LAN
Wireless Connectivity	Optional FC3-POED	Additional 1x GbE LAN on RJ45 with PoE device capabilities
	On-board	Optional On-board module with Wi-Fi 6E, BT 5.2
	M.2 Key-E ¹	For M.2 2230 module with Wi-Fi 6E, BT 5.2
USB	M.2 Key-B	For M.2 LTE/5G modem (mutual with M.2 SATA), w/ micro-SIM tray
	USB 2.0	4x USB 2.0 on USB Type-A
Serial/GPIO	USB 3.1	2x USB 3.1 on USB Type-A
	Type	Optional terminal block with isolated serial and GPIO, up to 24V
	Serial port	Optional isolated RS-232/422/485
Audio	GPIO	2x isolated GPI + 2x isolated GPO
	Codec	Optional audio codec
Power	Interfaces	Optional analog output, analog input on 3.5 mm jacks
	Input power	7V – 42V, up to 36W DC input
	Connector	5.5 mm power jack w/ locking
	Power supply unit	Including universal AC wall mount power supply
TPM	Optional FC3-PoE	Input power by PoE, GbE LAN on RJ45
	Internal fTPM	Intel® PTT
OS support	Discreet TPM	Optional discreet TPM 2.0
	Windows 10	Windows 10 IoT Enterprise LTSC 2021 / Windows 10 Pro
	Windows 11	Windows 11 Pro
Operating Environment	Linux	Linux Mint / Ubuntu
	Commercial temperature	0°C to 45°C
	Extended temperature	-20°C to 70°C
	Industrial temperature	-40°C to 85°C
Physical Characteristics	Humidity	5% - 95% non-condensing
	Cooling	Fanless, passive cooling
	Dimensions	132.8 mm X 100 mm X 34.8 mm
	Weight	~ 420 gr.
Mounting	Mounting	Side / bottom VESA / DIN Rail mount

Dimensions

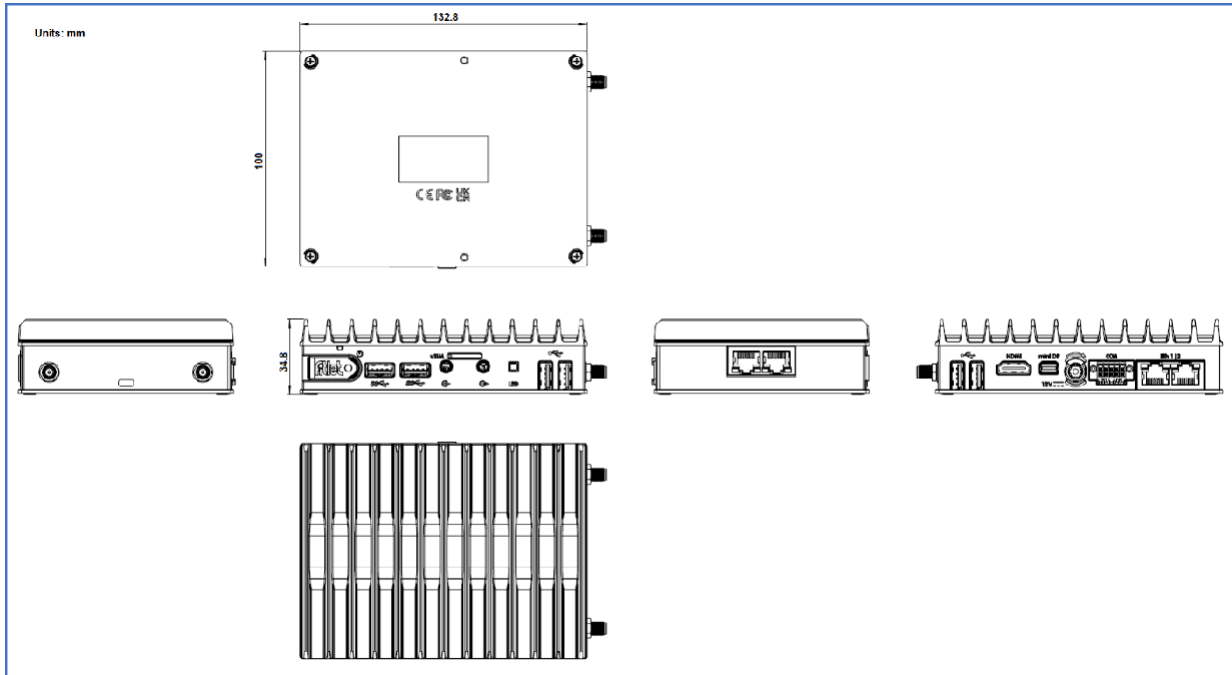

Interfaces

Location	Connector	Interface		
Front Panel	2x USB Type-A	2x USB 2.0		
	1x HDMI	HDMI 1.4b (up to 3840 x 2160 @ 30Hz)		
	1x mini-DP	DP 1.2 (up to 4096 x 2160 @ 60Hz) Dual mode		
	1x 5.5 mm power jack	7V – 42V DC power input		
	1x terminal block (Optional)	Isolated RS-232/422/485 + 2x GPI + 2x GPO		
	2x RJ45	2x 10/100/1000 Mbps Ethernet		
Rear Panel	Power button	On/Off push button w/ power LED		
	2x USB Type-A	2x USB 3.1		
	2x 3.5 mm jacks (Optional)	Analog output, analog input audio		
	Micro-SIM tray	Micro-SIM Tray for M.2 LTE/5G modem		
	LED	Debug/programmable LED		
Right Panel	2x USB Type-A	2x USB 2.0		
Right Panel	2x SMA (Optional)	2x SMA antennas for Wi-Fi/BT or cellular modem		
Left Panel	FACET card connectors (Optional)	Ethernet, serial, etc. from FACET expansion card		
	2x SMA (Optional)	2x SMA antennas for Wi-Fi/BT or cellular modem		
Location	Connector	Form factor	Interface	Usage
Internal Top	SO-DIMM	DDR4 SO-DIMM	DDR4	DDR4 module
Internal Bottom	M.2 Key-M	M.2 up to 2280 or Optional 2.5" SATA storage ¹	PCIe Gen 3 x4 / SATA	- NVMe/SATA storage - M.2 PCIe x1x HDMI
		M.2 Key-B	M.2 Up to 3060 or Optional 2.5" SATA storage ¹	PCIe Gen 3 x1 /SATA USB 2.0
	M.2 Key-E	M.2 2230 or FACET expansion card ²	PCIe Gen 3 x2 USB 2.0	- Wi-Fi/BT module - FACET card

Notes:

- Up to 1 unit of 2.5" SATA storage expansion (EB-M2SATA) is possible
- FACET expansion card and Wi-Fi/BT card are mutually exclusive. For Wi-Fi/BT on systems with FACET cards, an onboard WiFi/BT module must be selected. The onboard Wi-Fi/BT module is not functional with FC3-LAN installed.

Expansion boards

Name	Description	Compatible connector
FC3-LAN	2x GbE LAN on RJ45	M.2 Key-E (FACET) ¹
FC3-POED	GbE LAN PoE device on RJ45	M.2 Key-E (FACET) ¹
FC3-OPLN	GbE on SFP+ for optic LAN	M.2 Key-E (FACET) ¹
EB-M2SATA	SATA expansion for 2.5" HDD / SSD ^{2,3}	M.2 Key-M or M.2 Key-B

Notes:

1. FACET expansion card and Wi-Fi/BT card are mutually exclusive. For Wi-Fi/BT on systems with FACET cards, an onboard WiFi/BT module must be selected.
2. Up to 1 unit of EB-M2SATA is possible, and up to two storage devices in total.
3. EB-M2SATA expansion requires deep bottom that will enlarge the fitlet3 size.
4. FC3-LAN and Wi-Fi module are mutually exclusive. For Wi-Fi functionality with FC3-LAN, an external Wi-Fi dongle may be used

Optional accessories

Name	Description
FITLET3-ACC-PSU	Universal power supply unit (one units is included in fitlet3 package)
FITLET3-ACC-BRKT	VESA mounting bracket
FITLET3-ACC-DIN	DIN rail mounting kit (Requires VESA mounting bracket)
FITLET3-ACC-DINSD	Side DIN rail mounting kit (does not require VESA mounting bracket)
FITLET3-ACC-POWBTN	Remote power button with LED with 25cm wire

Download the latest version of this document at www.fit-iot.com

For ordering information and additional technical information visit www.fit-iot.com