




Noodoe EV A7

Smart EV Charging

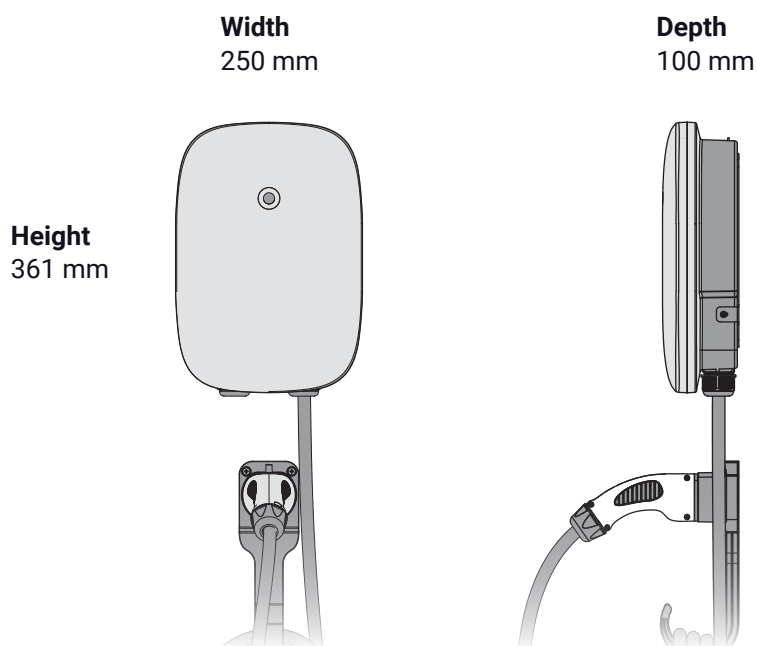

SPECIFICATIONS

Cloud service	Noodoe EV OS
Maximum output power	7.3 kW
Output power	32 A @230 Vac, 1-phase
Vehicle connector	IEC 62196-2 Type 2
Charging cable length	5 m
Input power	1-phase, 3-wire, 230 Vac, 32 A maximum
Grounding system	TN, TT
Efficiency	> 99%
Power factor	> 0.99
Display	LED indicator
Communication protocol	OCPP 1.6 JSON
Network connectivity	Ethernet, Wi-Fi
RFID	RFID ISO/IEC 14443 A/B
Ingress protection(IP)	IP65
Impact protection	IK08
Electrical protection	Over voltage protection, under voltage protection, surge protection, ground fault protection, integrated 30 mA Type-A RCD with 6 mA DC leakage protection (RDC-DD) - meets IEC 62955, short circuit protection, over current protection, over temperature protection
Operating temperature	-30 °C to +50 °C
Dimensions	250 (W) x 361 (H) x 100 (D) mm
Weight	4.6 kg
Certifications	CE, SAA, RCM

Noodoe EV OS



Noodoe Corp.

15F, No.19-13,
Sanchong Road,
Nangang District,
Taipei City 11501,
Taiwan

+886 2 7722 0677
info@noodoe.com
noodoe.com