




Noodoe EV DC30P

Smart EV Charging

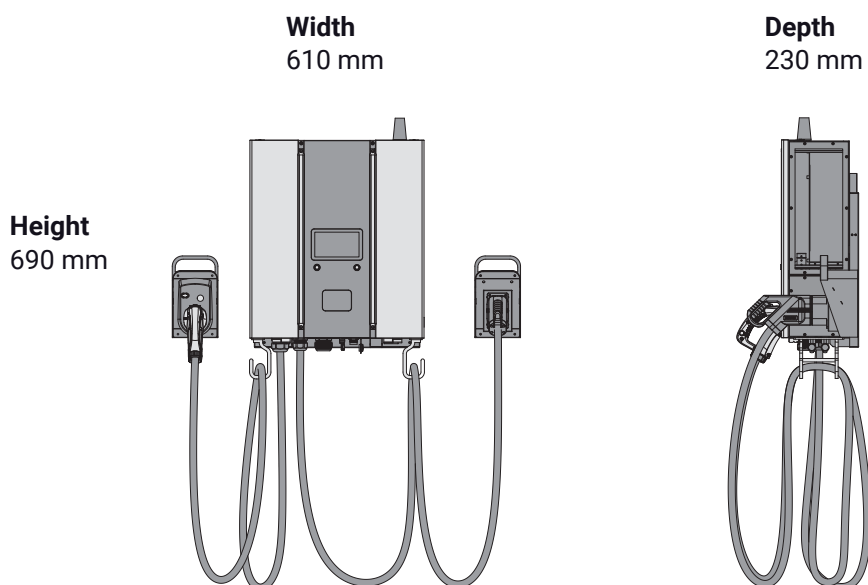

SPECIFICATIONS

Cloud service	Noodoe EV OS
Maximum output power	30 kW
Output power	CCS2: 60 A @150~500 Vdc or 31.5 A @950 Vdc CHAdeMO: 60 A @150~500 Vdc
Vehicle connector	CCS2 or CHAdeMO
Charging cable length	4 m
Input power	3-phase, 5-wire, 380~415 Vac, 60 A maximum
Grounding system	TN, TT, IT
Efficiency	> 94%
Power factor	> 0.99
Display	7 inch LCD
Communication protocol	OCPP 1.6 JSON
Vehicle communication interface	ISO 15118
Network connectivity	Ethernet, Wi-Fi, 3G, 4G
RFID	RFID ISO/IEC 14443 A/B
Ingress protection(IP)	IP55
Impact protection	IK10
Electrical protection	Over current protection, over voltage protection, over temperature protection, under voltage protection, surge protection device, insulation monitoring device, short circuit protection, over power protection
Operating temperature	-30 °C to +50 °C
Dimensions	610 (W) x 690 (H) x 230 (D) mm
Weight	80 kg (single gun) 88 kg (dual guns)
Certifications	CE, RED

Noodoe EV OS



Noodoe Corp.
15F, No.19-13,
Sanchong Road,
Nangang District,
Taipei City 11501,
Taiwan
+886 2 7722 0677
info@noodoe.com
noodoe.com