




Product Model: MM183A series	MEMS Accelerometer(DC Response)		Version: A Date: 20/06/2024																		
<p>Uses:</p> <ul style="list-style-type: none"> •Low-frequency, motion and tilt measurements • Flight testing • Road load testing • Transportation • Modal analysis <p>Features:</p> <ul style="list-style-type: none"> • High temperature stability • Hermetically sealed • Low power consumption 	<table border="1"> <thead> <tr> <th>Performance</th> <th>MM183A05</th> </tr> </thead> <tbody> <tr> <td>Sensitivity ($\pm 10\%$)</td> <td>300 mV/g</td> </tr> <tr> <td>Measurement Range</td> <td>± 5 g</td> </tr> <tr> <td>Resolution</td> <td>7.5 mg rms</td> </tr> <tr> <td>Frequency Range($\pm 5\%$)</td> <td>0-200 Hz</td> </tr> <tr> <td>Non-linearity</td> <td>≤ 1 %</td> </tr> <tr> <td>Transverse Sensitivity</td> <td>$\leq 5\%$</td> </tr> <tr> <td>Overload Limit (Shock)</td> <td>± 3000g</td> </tr> </tbody> </table>	Performance	MM183A05	Sensitivity ($\pm 10\%$)	300 mV/g	Measurement Range	± 5 g	Resolution	7.5 mg rms	Frequency Range($\pm 5\%$)	0-200 Hz	Non-linearity	≤ 1 %	Transverse Sensitivity	$\leq 5\%$	Overload Limit (Shock)	± 3000 g	<p>The MEMS Accelerometer, are DC response accelerometers. Designed to measure low-frequency vibration down to DC. The sensing element offers a wide dynamic range and very stable frequency response even after subjection to high shock levels. It features an integral cable that terminates with a LEMO 7 pin connector associated with MM3832 (signal conditioner). The housing material is titanium.</p>			
	Performance	MM183A05																			
	Sensitivity ($\pm 10\%$)	300 mV/g																			
	Measurement Range	± 5 g																			
	Resolution	7.5 mg rms																			
	Frequency Range($\pm 5\%$)	0-200 Hz																			
	Non-linearity	≤ 1 %																			
	Transverse Sensitivity	$\leq 5\%$																			
	Overload Limit (Shock)	± 3000 g																			
	<table border="1"> <tbody> <tr> <td>Temperature Range</td> <td>-40 ~+85 °C</td> </tr> <tr> <td>Excitation Voltage</td> <td>+9~+15 VDC</td> </tr> <tr> <td>Excitation Current</td> <td>≤ 5 mA</td> </tr> <tr> <td>Size mm</td> <td>As left figure</td> </tr> <tr> <td>Weight</td> <td>~25 g</td> </tr> <tr> <td>Mounting</td> <td>(2) $\Phi 4$(Thru-hole)</td> </tr> <tr> <td>Output Impedance</td> <td>≤ 100 Ω</td> </tr> <tr> <td>Output Connector</td> <td>Integral Cable</td> </tr> <tr> <td>Housing Material</td> <td>Titanium</td> </tr> </tbody> </table>	Temperature Range	-40 ~+85 °C	Excitation Voltage	+9~+15 VDC	Excitation Current	≤ 5 mA	Size mm	As left figure	Weight	~25 g	Mounting	(2) $\Phi 4$ (Thru-hole)	Output Impedance	≤ 100 Ω	Output Connector	Integral Cable	Housing Material	Titanium		
	Temperature Range	-40 ~+85 °C																			
	Excitation Voltage	+9~+15 VDC																			
	Excitation Current	≤ 5 mA																			
	Size mm	As left figure																			
Weight	~25 g																				
Mounting	(2) $\Phi 4$ (Thru-hole)																				
Output Impedance	≤ 100 Ω																				
Output Connector	Integral Cable																				
Housing Material	Titanium																				
<table border="1"> <tbody> <tr> <td>Sealing</td> <td>Welded</td> </tr> </tbody> </table>	Sealing	Welded	 <p style="text-align: center;">Metromatics ABN: 47 007 346 287</p>																		
Sealing	Welded																				
Accessories	<ol style="list-style-type: none"> 1. Integral cable (5 cores) 1ea 3m 2. Certificate of inspection 1ea 3. M4 stud 2ea 		<p>25 Flinders Parade, North Lakes QLD 4509, AUSTRALIA www.metromatics.com.au sales@metromatics.com.au Brisbane: +61 7 3868 4255 I Sydney: +61 2 9460 4355 Melbourne: +61 3 9872 4592</p>																		
Remark																					

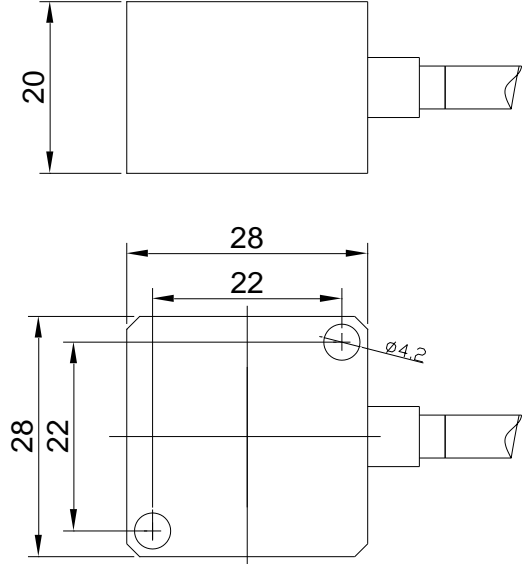