

INJ-C201G-bt-100-24-T

Industrial Gigabit Enhanced PoE++ Injector
 - 1*10/100/1000Base-T(X) with Enhanced PoE-PSE
 (100W/Port) + 1*10/100/1000Base-T(X), Booster Version,
 9~55VDC, EOT: -40°C to 75°C



Features


- ▶ Supports 10/100/1000Tx for PoE & Data Out
- ▶ IEEE 802.3af/at/bt Compliant PoE
- ▶ Provide Data and Power over Ethernet to Power Device
- ▶ Provides up to 100 Watts on PoE Port
- ▶ Provided power booster technologies for low voltage power inputs
- ▶ Redundant 9~55VDC power inputs design
- ▶ Dip-switch setting for PoE mode and dual PD check
- ▶ IP30 Protection
- ▶ Operating Temperature Range – -40°C to 75°C
- ▶ DIN-Rail or Wall Mountable
- ▶ 5-Year Warranty

INTRODUCTION

Antaira Technologies' INJ-C201G-bt-100-24-T, solve the problem simply by deploying data and power from non-PoE switch and power input to the PD device. PoE injector is a brilliant low-cost solution for the case that only one side of devices is supporting PoE function. Therefore, INJ-C201G-bt-100-24-T will be your best choice to deal with the lack of PoE function cases.

INJ-C201G-bt-100-24-T support low voltage 9VDC model with power booster technology, ensuring full 90W PoE output, for better usage in the automation industry. Moreover, for some special application which eagers for more PoE power from the PSE device, this model also supports Enhanced PoE mode to offer up to 100W to the powered device. INJ-C201G-bt-100-24-T with fan-less design, besides extending surely apply to various industrial application, it works perfectly in polarized temperature from -40°C to 75°C, and undoubtedly becomes your best option in the industrial market.

DIMENSIONS

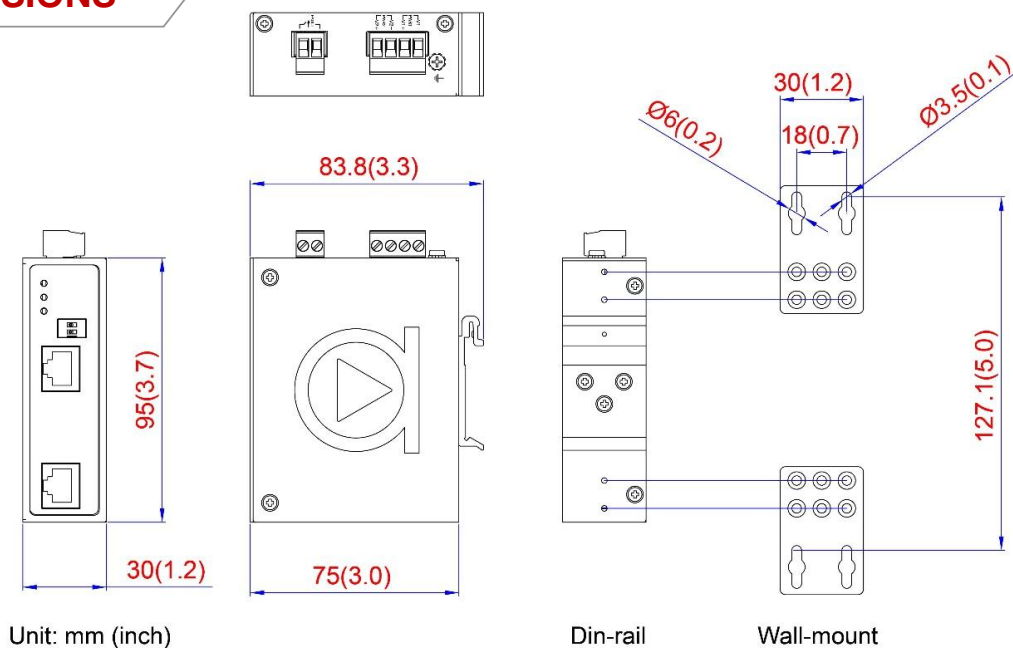

SPECIFICATIONS

Technology		Power Requirement	
Standards	IEEE 802.3 10BaseT Ethernet	Input Voltage	9~55VDC Redundant Input
	IEEE 802.3u 100BaseTX Fast Ethernet	Power Connection	1 removable 4-contact terminal block
	IEEE 802.3ab 1000BaseT(X)	Relay Contact	24VDC, 1A resistive
	IEEE 802.3af/at/bt Power over Ethernet	Reverse Polarity Protection	Present
Switch Properties		Overload Current Protection	Present
Transfer Rate	14,880pps for Ethernet Port	PoE Pin Assignment	V-, V-, V+, V+, for pin 1, 2, 3, 6;
	148,800pps for Fast Ethernet Port		V+, V+, V-, V-, for pin 4, 5, 7, 8
	1,488,000pps for Gigabit Ethernet Port		*Support Modes: Mode A, Mode B, 4-Pair Mode
Interface			PoE Power Budget
Ethernet Port	2*10/100/1000BaseT(X) (1*Data IN, 1*PoE OUT)	System Power Consumption	1.6W
DIP Switch	DIP Switch 1: PoE Mode	Environmental Limits	
	On - Enhanced / Off (default) - Standard	Operating Temperature	-40°C to 75°C
	DIP Switch 2: Dual PD Check	Storage Temperature	-40°C to 85°C
LED Indicators	On - Enable / Off (default) - Disable	Ambient Relative Humidity	5 to 95%, (non-condensing)
	Power, PoE, PoE Load	Regulatory Approvals	
Mechanical Characteristics		EMI	FCC Part 15 Subpart B Class A, CE EN55032/EN61000-6-4 Class A
Housing	Metal, IP30 protection	EMS	CE EN55035/EN61000-6-2, IEC61000-4-2,3,4,5,6,8
Dimensions	30 x 95 x 75 mm (W x H x D)	Free Fall	IEC60068-2-32
Weight	Unit: 0.82 lb.	Shock	IEC60068-2-27
	Shipping: 1.16 lbs.	Vibration	IEC60068-2-6
Mounting	DIN-Rail Mounting, Wall Mounting	Green	RoHS Compliant
Protection		Certifications	FCC, CE, UL 61010-1 (pending), 61010-2-201 (pending)
Network Cable	10Base-T: 2-pair UTP/STP Cat. 3, 4, 5 cable	Compliance	NEMA TS1/TS2
	EIA/TIA-568 100-ohm (100m)	Warranty	5 Years
	100Base-TX: 2-pair UTP/STP Cat. 5 cable		
	EIA/TIA-568 100-ohm (100m)		
	1000Base-TX: 4-pair UTP/STP Cat.5/5E cable; EIA/TIA-568 100-ohm (100m)		
	NOTE: The total length from the device A through the injector to the device B must not exceed 100 meters		

ORDERING INFO

INJ-C201G-bt-100-24-T Industrial Gigabit Enhanced PoE++ Injector - 1*10/100/1000Base-T(X) with Enhanced PoE-PSE (100W/Port) + 1*10/100/1000Base-T(X), Booster Version, 9-55VDC, EOT: -40°C to 75°C

TO LEARN MORE - CONTACT:



Metromatics

sales@metromatics.com.au | www.metromatics.com.au

Brisbane 07 3868 4255 | Melbourne 03 9872 4592 | Sydney 02 9460 4355