

LMP-1002G-SFP-24 Series

10-Port Industrial Gigabit PoE+ Managed Ethernet Switch, w/8*10/100/1000Tx (30W/Port) + 2*100/1000 SFP Slots; 12~36VDC Input



Features


- ▶ Supports 8*10/100/1000Tx IEEE 802.3at/af Compliant with 30W/Port and 2*100/1000 SFP Slots for Fiber Connections
- ▶ Network Redundancy: STP/RSTP/MSTP, and G.8032 ERPS (Recovery Time <50ms)
- ▶ Supports IPv4/IPv6, and DHCP Option 66/67/82
- ▶ Supports Modbus/TCP protocol for Device Management and Monitoring
- ▶ Configuration: Web Console, Telnet, CLI Command
- ▶ IGMP v1/v2 for Multicast Traffic Filtering
- ▶ QoS (IEEE802.1p/1Q), CoS/ToS to Increase Determinism
- ▶ IEEE802.1Q VLAN for Easy Network Planning
- ▶ Enhanced Network Security with IEEE802.1X, SNMP v1/v2c/v3, HTTPS, and SSH/SSL
- ▶ Auto Warning by Exception through E-mail, Relay Output
- ▶ Support RMON Function for Efficient Network Monitoring
- ▶ Support Port Mirroring for Online Diagnostic
- ▶ Low Power Input 12~36VDC (w/Voltage Booster)
- ▶ 5-Year Warranty

INTRODUCTION

Antaira's LMP-1002G-SFP-24 series is a 10-port industrial Gigabit PoE+ managed Ethernet switch embedded with 8*10/100/1000Tx Ethernet ports that support IEEE802.3at/af for a maximum of 30W/port, and 2*100/1000 dual rate SFP slots for Gigabit fiber connections. It is a fully manageable Layer 2 Ethernet switch that is pre-loaded with a user-friendly web management console design. It supports the ring network redundancy function using the market's open standard ITU-T G.8032 ERPS (Ethernet Ring Protection Switch) protocol that has a <50ms network recovery time. The advanced network filtering and security functions, such as, IGMP, VLAN, QoS, SNMP, RMON, Modbus TCP, and 802.1X/HTTPS/SSH/SSL increase determinism and improve network management for remote SCADA systems or control networks.

The LMP-1002G-SFP-24 series is IP30 rated and DIN-rail mountable. There are also two wide operating temperature models for either a standard temperature range (STD: -10°C to 70°C) or an extended temperature range (EOT: -40°C to 75°C). This series supports a dual power input having a low voltage range (12~36VDC) and a built-in voltage booster allowing the unit to give a full 48VDC PoE power for any mobile PoE application or any low voltage power sourcing environment. It also provides high EFT and ESD protection for industrial networking applications, such as, power/utility, water wastewater, oil/gas/mining, factory automation, security surveillance, ITS and any other outdoor or harsh environment.

DIMENSIONS

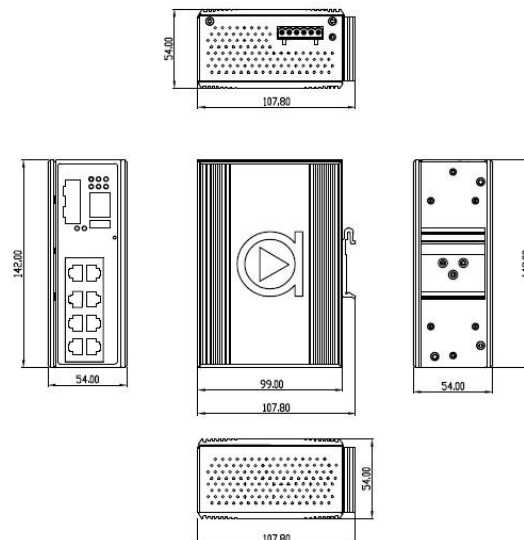

SPECIFICATIONS

Technology		Protection		
Standards	IEEE 802.3 10Tx Ethernet	Overload Current	Present	
	IEEE 802.3u 100Tx Fast Ethernet	Power Reverse Polarity	Present	
	IEEE 802.3ab 1000Tx Gigabit Ethernet	CPU Watchdog	Present	
	IEEE 802.3z Gigabit Fiber	Network Cable	10Base-T: 2-pair UTP/STP Cat. 3, 4, 5 cable; 100Base-TX: 2-pair UTP/STP Cat. 5 cable. EIA/TIA-568 100-ohm (100m)	
	IEEE 802.3x Flow Control for Full Duplex		1000BaseTX: UTP/STP Cat.5/5E cable; EIA/TIA-568 100-ohm (100m)	
	IEEE 802.3ad for Port Trunk with LACP			
	IEEE 802.3at/af PoE (Power-over-Ethernet)	Mechanical Characteristics		
	IEEE 802.1d STP (Spanning Tree Protocol)	LED Indicator	Per Unit: Power 1 & 2 (Green), Fault (Red) PoE: Feeding Power (Green)	
	IEEE 802.1w RSTP (Rapid Spanning Tree Protocol)	Housing	Metal, IP30 rated	
	IEEE 802.1s MSTP (Multiple Spanning Tree Protocol)	Dimensions	54 x 142 x 99 mm	
ITU-T G.8032/Y.1344 ERPS (Ethernet Ring Protection Switch) Protocol	Weight	Unit: 2.4 lbs Shipping: 3.2 lbs		
IEEE 802.1Q for VLAN Tagging	Mounting	DIN-Rail; Wall-mount (Optional)		
IEEE 802.1x for Network Authentication	Power Requirement			
IEEE 802.1p QoS/CoS Protocol for Traffic Prioritization	Input Voltage	12~36VDC Redundant Input		
Protocol	IGMPv1/v2, SNMPv1/v2c/v3, TFTP, SNMP, SMTP, RMON, HTTP, HTTPS, Telnet, Syslog, DHCP Option 66/67/82, SSH/SSL, Modbus/TCP, LLDP, IPv4/IPv6	Power Connection	1 removable 6-contact terminal block	
	Switch Properties			
	Switch Architecture	Back-Plane (Switching Fabric): 20.0Gbps		
	Configuration	Web Console, Telnet, CLI		
	Processing Type	Store-and-Forward		
Flow Control	IEEE 802.3x for full duplex mode, back pressure for half duplex mode			
Transfer Rate	14,880pps for 10Base-T Ethernet 148,800pps for 100Base-T Fast Ethernet 1,488,000pps for Gigabit Ethernet			
Packet Buffer	4 Mbits			
Jumbo Frame	9.6K			
MAC Table Size	8K			
VLAN Group	1 ~ 4094			
IGMP Group	Up to 256 Groups			
Port Interface				
Ethernet Port	8*10/100/1000BaseTx (PSE: 30W/Port) auto negotiation speed, Full/Half duplex mode, and auto MDI connection			
Fiber Port	2*100/1000 SFP Slots for Fiber			
Wavelength	Refer to SFP Modules			
RS232 Serial Console	1*RS232 in RJ45 connector with console cable, 115.2Kbps, 8,N,1			
Configuration Backup	1*USB 2.0			
Power Consumption		15 Watts (no PD included) 145 Watts @ 12VDC 200 Watts @ 24VDC		
Environmental Limits				
Operating Temperature		STD: -10° to 70°C EOT: -40° to 75°C		
Storage Temperature		-40°~85°C		
Ambient Relative Humidity		5 to 95%, (Non-condensing)		
Regulatory Approvals				
EMI		FCC Part 15 Subpart B Class A, CE EN55032/EN61000-6-4 Class A		
EMS		CE EN55024/EN 61000-6-2 IEC61000-4-2,3,4,5,6,8		
Free Fall		IEC60068-2-32		
Shock		IEC60068-2-27		
Vibration		IEC60068-2-6		
Green		RoHS Compliant		
Certifications		FCC, CE, UL 61010-1, 61010-2-201, Class 1 Division 2 NEMA TS2, ATEX		
Warranty		5 Years		

ORDERING INFO

LMP-1002G-SFP-24	10-Port Industrial Gigabit PoE+ Managed Ethernet Switch, w/8*10/100/1000Tx (30W/Port) and 2*100/1000 SFP Slots; 12~36VDC Input
LMP-1002G-SFP-24-T	10-Port Industrial Gigabit PoE+ Managed Ethernet Switch, w/8*10/100/1000Tx (30W/Port) and 2*100/1000 SFP Slots; 12~36VDC Input; EOT: -40° to 75°C

Optional Accessories

MDR-60-24	60 Watt Industrial Slim Single Output DIN-Rail Power Supply – 24VDC / 2.50 Amps
DR-75-24	75 Watt Industrial Single Output DIN-Rail Power Supply – 24VDC / 3.2 Amps
DR-120-24	120 Watt Industrial Single Output DIN-Rail Power Supply – 24VDC / 5.0 Amps
SDR-240-24	240 Watt Industrial Single Output DIN-Rail Power Supply – 24VDC / 10.0 Amps
SFP-M-T	1 Gigabit Fiber SFP Transceiver, Multi Mode 550M / LC / 850nm, -40°~85°C

SFP-S10-T

1 Gigabit Fiber SFP Transceiver, Single Mode 10KM / LC / 1310nm, -40°~85°C

DIN-RACK-2U

DIN-Rail to 19" Rack Mount Adapter for all DIN-Rail Mountable Products, 2U Height

TO LEARN MORE - CONTACT:



Metromatics

sales@metromatics.com.au | www.metromatics.com.au

Brisbane 07 3868 4255 | Melbourne 03 9872 4592 | Sydney 02 9460 4355