

IMC-C100-XX Series

Compact 10/100TX to 100FX Industrial Media Converter with SC/ST Connector



Features


- ▶ 1*10/100TX Fast Ethernet
- ▶ 1*100FX SC/ST Connector (Multi / Single-Mode)
- ▶ RJ45 Port Support Auto MDI / MDI-X Function
- ▶ Auto Negotiation Speed, Half / Full Duplex
- ▶ Store-and-Forward Switching Architecture
- ▶ Built-in Link Fault Pass Through (LFP)
- ▶ Built-in Far End Fault (FEF)
- ▶ Wide-Range Redundant Power Design
- ▶ Redundant Power Input: 12~48VDC
- ▶ Power Polarity Reverse Protection
- ▶ Overload Current Protection
- ▶ DIN-Rail or Wall Mountable
- ▶ IP30 Protection
- ▶ 5-Year Warranty

INTRODUCTION

Antaira Technologies' **IMC-C100-XX Series** is a compact IP30 rated Ethernet-to-Fiber media converter featuring a 10/100TX Ethernet port and a fixed fiber interface supporting ST or SC connectors depending on the model. There are Multimode and Single-Mode models to support applications with a variety of fiber distances and types. It is designed to fulfill industrial applications that require fiber optic distance extension while using minimal space.

The IMC-C100-XX series has a built-in "Link Fault Pass Through" (LFP) and "Far End Fault" (FEF) function with 12~48VDC redundant power inputs with reverse polarity and overload current protection. This product series supports DIN-rail as well as wall mountable orientations and provides operating temperature range models in STD: -10°C to 70°C and EOT: -40°C to 80°C.

DIMENSIONS

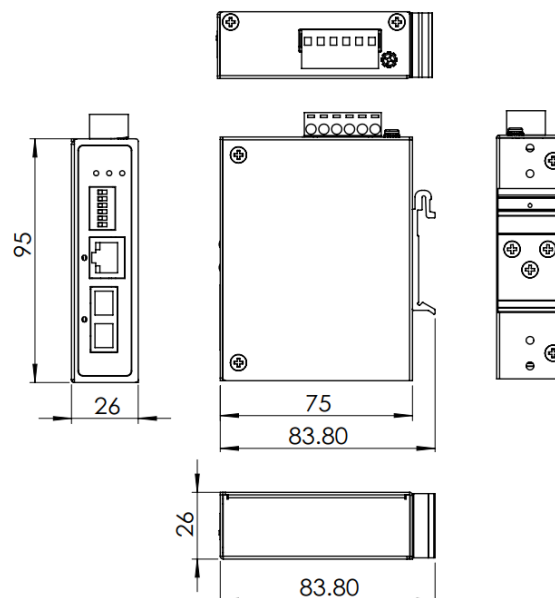

SPECIFICATIONS

Technology

Standards	IEEE 802.3 10BASE-T Ethernet IEEE 802.3u 100BASE-TX Fast Ethernet
------------------	--

Processing Type	Store and Forward
------------------------	-------------------

Protocol	CSMA/CD
-----------------	---------

Flow Control	IEEE 802.3x back pressure flow control
---------------------	--

Switch Properties

Memory Buffer	128kbits
----------------------	----------

Interface

Ethernet Port	1*RJ45 Port w/10/100TX, auto negotiation speed, Full/Half duplex mode, and auto MDI/MDI-X connection
----------------------	--

Fiber Port	1*100FX SC/ST type connector Multi-mode: 50/125um or 62.5/125um Single-mode: 9/125um or 10/125um
-------------------	--

Fiber Wavelength	Depends on fixed fiber modules
-------------------------	--------------------------------

LED Indicators	Power 1, Power 2, Fault:: On / Off Fiber Port: Link / Act Ethernet Port: Link / Act
-----------------------	---

Mechanical Characteristics

Housing	Metal, IP30 protection
----------------	------------------------

Dimensions	26 x 95 x 75 mm (W x H x D)
-------------------	-----------------------------

Weight	Unit: 0.551 lb. Shipping: 0.815 lb.
---------------	--

Mounting	DIN-Rail Mounting, Wall Mounting
-----------------	----------------------------------

Power Requirement

Input Voltage	12 to 48VDC, Redundant Inputs
----------------------	-------------------------------

Power Connection	1 removable 6-contact terminal block
-------------------------	--------------------------------------

Reverse Polarity Protection	Present
------------------------------------	---------

Overload Current Protection	Present
------------------------------------	---------

Power Consumption	2 Watts for System
--------------------------	--------------------

Relay Contact	24VDC, 1A resistive
----------------------	---------------------

Environmental Limits

Operating Temperature	STD: -10°C to 70°C EOT: -40°C to 80°C
------------------------------	--

Storage Temperature	-40°C to 85°C
----------------------------	---------------

Ambient Relative Humidity	5% to 95%, (non-condensing)
----------------------------------	-----------------------------

Regulatory Approvals

EMI	FCC Part 15 Subpart B Class A, CE EN 55032 Class A, EN 61000-6-4 Class A
------------	--

EMS	CE EN 55024 Class A, EN 61000-6-2 Class A, IEC61000-4-2 (ESD), IEC61000-4-3 (RS), IEC61000-4-4 (EFT), IEC61000-4-5 (Surge), IEC61000-4-6 (CS), IEC61000-4-8 (Magnetic Field)
------------	---

Free Fall	IEC60068-2-32
------------------	---------------

Shock	IEC60068-2-27
--------------	---------------

Vibration	IEC60068-2-6
------------------	--------------

Green	RoHS Compliant
--------------	----------------

Certifications	FCC, CE, UL 61010-1, UL 61010-2-201
-----------------------	-------------------------------------

Warranty	5 Years
-----------------	---------

ORDERING INFO

IMC-C100-M	Compact 10/100TX to 100FX Industrial Media Converter, Multi-Mode 2km, SC Connector
-------------------	--

IMC-C100-M-T	Compact 10/100TX to 100FX Industrial Media Converter, Multi-Mode 2km, SC Connector; EOT: -40°C to 80°C
---------------------	--

IMC-C100-ST-M	Compact 10/100TX to 100FX Industrial Media Converter, Multi-Mode 2km, ST Connector
----------------------	--

IMC-C100-ST-M-T	Compact 10/100TX to 100FX Industrial Media Converter, Multi-Mode 2km, ST Connector; EOT: -40°C to 80°C
------------------------	--

IMC-C100-S3	Compact 10/100TX to 100FX Industrial Media Converter, Single-Mode 30km, SC Connector
--------------------	--

IMC-C100-S3-T	Compact 10/100TX to 100FX Industrial Media Converter, Single-Mode 30km, SC Connector; EOT: -40°C to 80°C
----------------------	--

IMC-C100-ST-S3	Compact 10/100TX to 100FX Industrial Media Converter, Single-Mode 30km, ST Connector
-----------------------	--

IMC-C100-ST-S3-T	Compact 10/100TX to 100FX Industrial Media Converter, Single-Mode 30km, ST Connector; EOT: -40°C to 80°C
-------------------------	--