
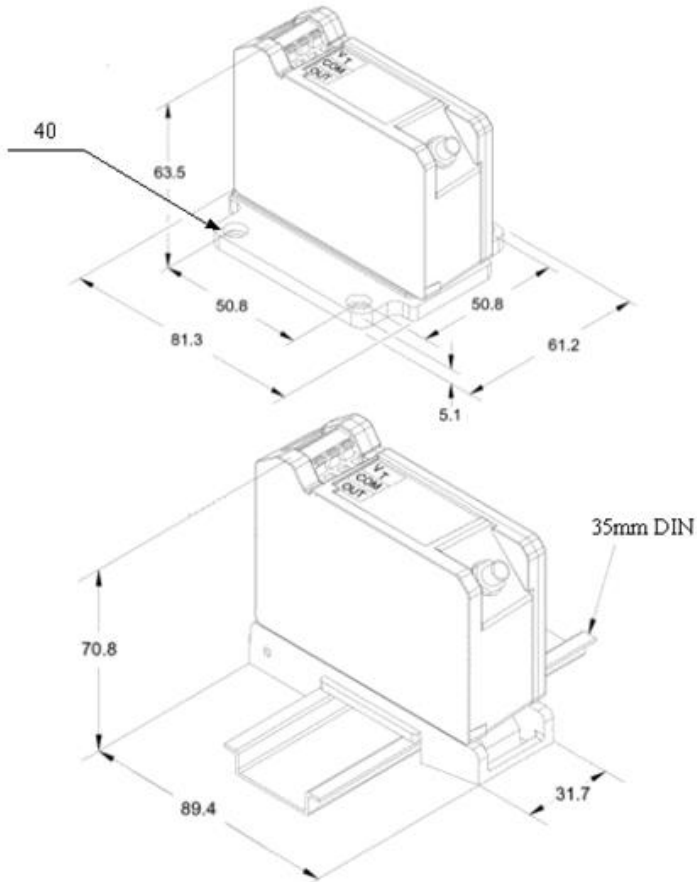



Product Model: MM401D series	Proximity (Eddy) Displacement Sensor		Version: A Date: 9/1/2025
<p>YMC401D Series of non-contact eddy current displacement sensor is based on the principle of eddy current effect formed by high-frequency magnetic field on the metal surface, which is an ideal sensor for detecting and controlling the displacement, vibration, rotational speed and other mechanical quantities of metal objects. It has the obvious advantages of non-contact measurement, wide linear range, high sensitivity, strong anti-interference ability, no media influence, stable and reliable, easy to handle.</p> 	Performance	MM401D04	
	Output	-2 ~ -18 VDC	
	Sensitivity($\pm 2\%$)	4 V/mm	
	Measurement Range	1.0 ~ 5.0 mm	
	Frequency Range(± 3 dB)	DC ~ 5,000 Hz	
	Non-linearity	$\pm 1\%$	
	Temperature Range(Probe)	-20 ~ +100 °C	
	Temperature Range(Pre-amplifier)	-20 ~ +70 °C	
	Probe Output Connector	SMA	
	Pre-amplifier Output Type	Terminals	
	Power Supply	-24VDC/12mA	
	Probe Diameter	$\Phi 11$ mm	
	Probe Mounting Size	M14 \times 1.5-110	
	Pre-amplifier Size	32 \times 90 \times 71	
	Calibration Material	#45 Steel	
Accessories	<ol style="list-style-type: none"> 1. Cable with probe 1ea 5m 2. Certificate of inspection 1ea 		 <p>Metromatics ABN: 47 007 346 287</p> <p>25 Flinders Parade, North Lakes QLD 4509, AUSTRALIA www.metromatics.com.au sales@metromatics.com.au Brisbane: +61 7 3868 4255 Sydney: +61 2 9460 4355 Melbourne: +61 3 9872 4592 </p>
Remark	Pre-amplifier DIN type is available. Extension cable or armored cable is available		