


Product Model: **MM243A Series**

General Purpose Triaxial PE Accelerometer



Version: A Date: 17/3/2022

Sensor Features:

Stable output in high and low temperatures
 Uses a wide temperature coefficient ceramic material
 Shear Design to reduce the influence of the environment on the signal

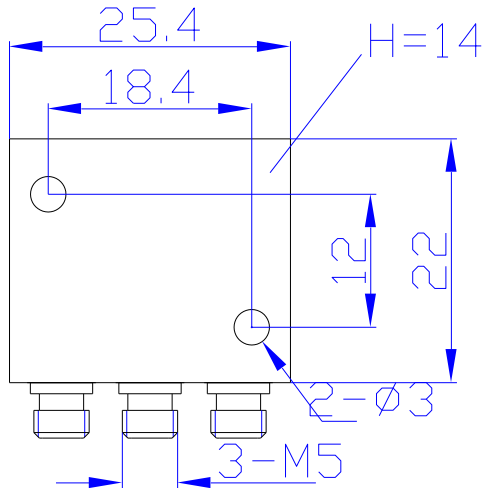

Model	MM243A-20
Sensitivity ($\pm 10\%$)	20 pC/g
Measurement Range	$\pm 1,000$ g
Transverse Sensitivity	$\leq 5\%$
Frequency Range (± 1 dB)	6,000 Hz
Resonant Frequency	~ 20 kHz
Non-linearity	$\leq 1\%$
Temperature Range	-54 \sim +150 $^{\circ}\text{C}$
Insulation Resistance	$\geq 10^{10}\Omega$
Sensing Element/Geometry	Ceramic/Shear
Size mm	As left figure
Weight	~ 44 g
Mounting	(2) $\Phi 3$ (Thru-hole)
Output Connector	(3) M5
Housing Material	Stainless Steel
Sealing	Epoxy Glue

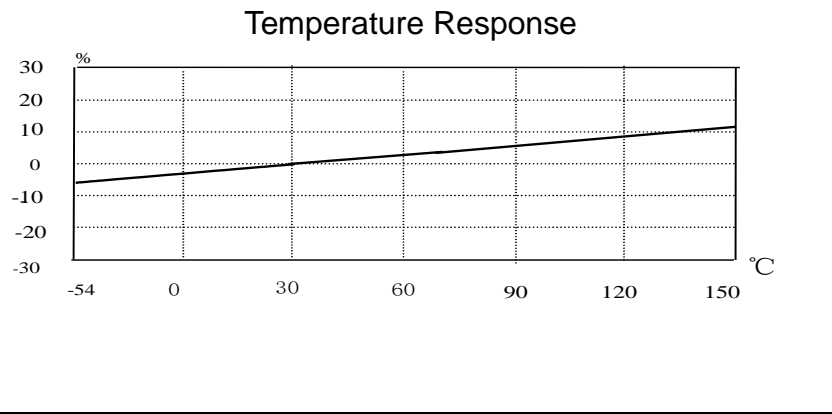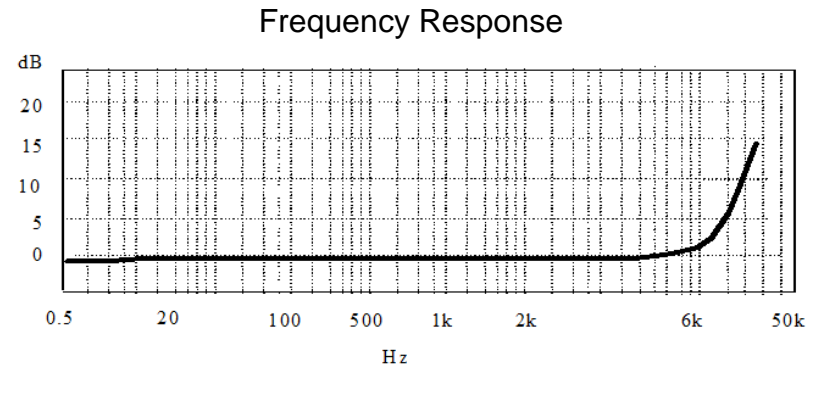

Accessories	<ul style="list-style-type: none"> • 2M Low Noise Cable 3 ea • Certificate of inspection 1ea + M3 Screw 2ea
Remark	

Metromatics

ABN: 47 007 346 287

25 Flinders Parade, North Lakes QLD 4509, AUSTRALIA
www.metromatics.com.au sales@metromatics.com.au
 Brisbane: +61 7 3868 4255 | Sydney: +61 2 9460 4355
 Melbourne: +61 3 9872 4592 | Adelaide: +61 8 8343 8516